

MASTER APPLICATION

Print Legible — Press Hard
Use Ink or Type

OFFICE USE ONLY

App/Permit NO. _____
Date _____ By _____
Plan Check No. _____

APPLICANT CRAIG and SHIRLEY MOODY DAYTIME TELEPHONE 425-4352
CURRENT MAILING ADDRESS 148 View Point Drive CITY Longview STATE WA ZIP 98632
PROPERTY OWNER Same TELEPHONE _____
MAILING ADDRESS _____ CITY _____ STATE _____ ZIP _____


PROJECT ADDRESS NO. 140 STREET ARMSTRONG CITY Castle Rock
SUBDIVISION _____ LOT _____ BLOCK _____
SECTION 4 TOWNSHIP 9N RANGE 2W TAX LOT NO. T-6A
PARCEL NO. WJ0406003 ACRES 20.00 AUDITORS FEE NO. _____

DESCRIBE PROJECT AND SPECIFIC USE: address and perc 3 Bedroom home
NO. OF BDRMS. 3

WATER SUPPLIED BY: well Private Public _____ Existing _____ New
SEWAGE DISPOSED BY: _____ Private Public _____ Existing _____ New
BUILDER _____ CONTRACTORS LICENSE NO. _____
TYPE OF HEATING _____ FAIR MARKET VALUE OF PROJECT _____

VICINITY SKETCH

SITE PLAN

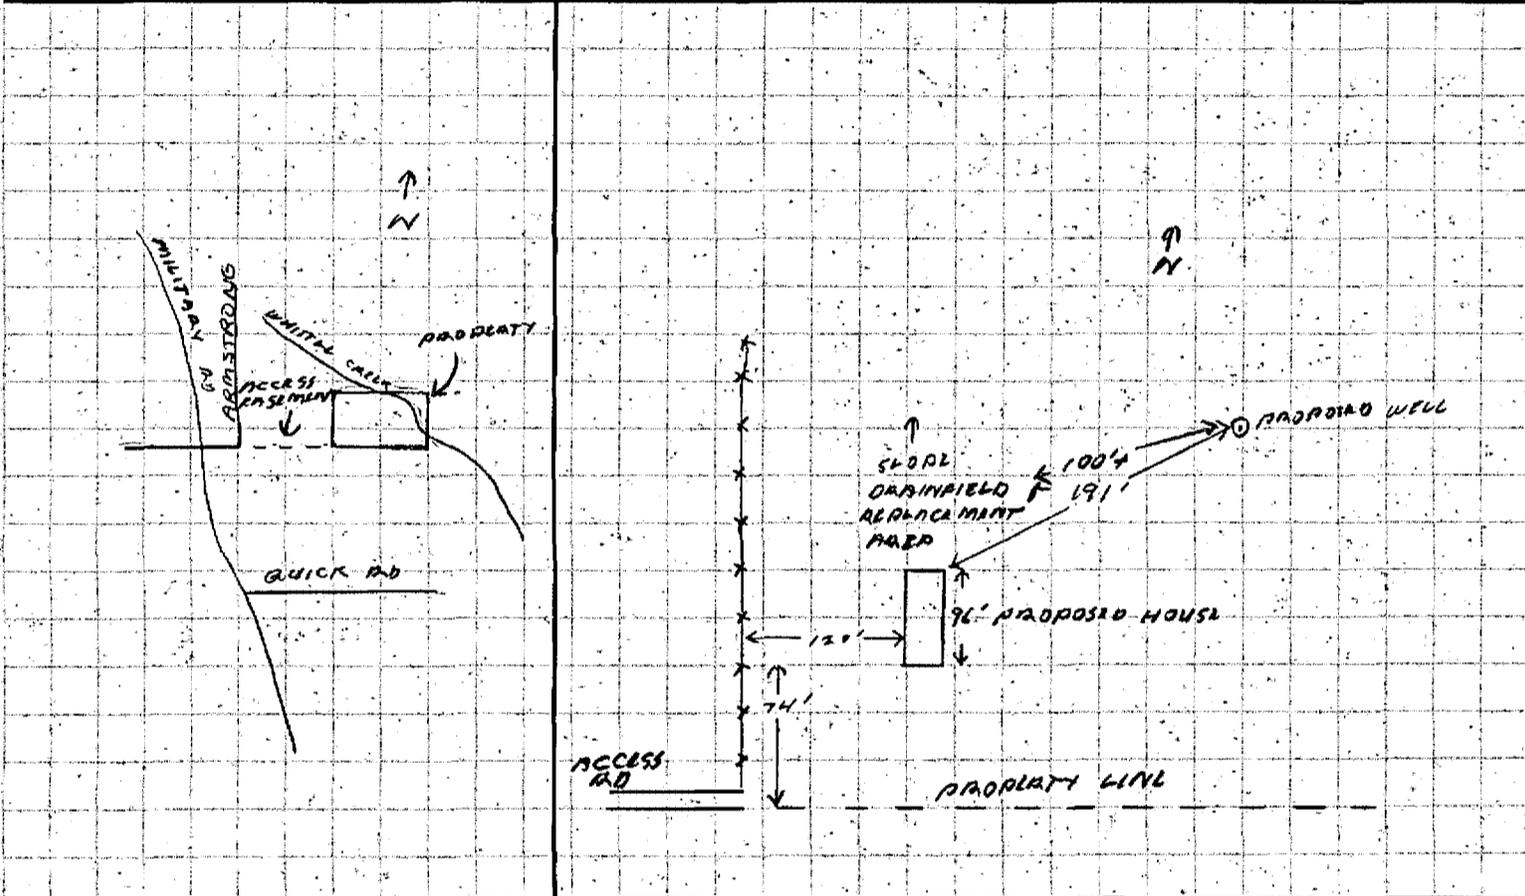

The above information and attachments are true and correct to the best of my knowledge and if any additions are required my application will not be processed until I forward it.

Date 5/9/88 Applicants Signature Willis J. [Signature]

★★ PLEASE NOTE BACK OF CARD FOR BUILDING INSPECTION REQUIREMENTS ★★
FOR OFFICE USE ONLY — DO NOT WRITE BELOW THIS LINE

MINIMUM SPECIFICATIONS:

Date _____ Permit Approved By _____

	PERMIT FEES	CODE	BY	Zoning _____ Comp Plan _____ Flood Plain _____
Soil Evaluation				Type of Occupancy: Existing _____ Proposed _____
Final Inspection				Address stake will be placed Date: <u>5-10-88</u> By: <u>[Signature]</u> Date: <u>5/13/88</u>
Septic Repair				Address Assigned: <u>140 ARMSTRONG RD</u>
Building				Soil Test Date _____ Re-test _____
Plan Check				SPECIAL NOTES:
Plmb/Mech				
Mobile Home				
Septic Design	<u>2500</u>	<u>SD</u>	<u>CS</u>	
Energy/Bldg.				
TOTAL				

1. Receipt No. 015474 Date 5-9-88
2. Receipt No. _____ Date _____ FINAL inspection approval soil: Date _____ By _____
3. Receipt No. _____ Date _____ FINAL inspection approval bldg: Date _____ By _____

-SITE CHARACTERISTICS

Topography: General Topographic Characteristics fairly flat
Drainage Characteristics: moderately well drained
Slopes: General 0 - 4 %; Proposed Drainfield Location 0 - 2 %
Geology: Type of Bedrock & Depth No data
Vegetation: hay field
Distance to, and type of, nearest surface water: NA
(If Less than 250 Feet)
Distance to nearby wells: NA
(If Less than 250 Feet)
Distance to public sewers: NA
(If Less than 500 Feet)
Other structures on property: NA

-SOIL SERIES

As mapped by U.S. Soil Conservation Service: KeB
Appears to be (if different from S.C.S. Classification): KeB

-SOIL LOGS

<u>Depth</u>	<u>Description</u>	<u>Comments</u>
<u>0 - 12</u>	<u>silt loam</u>	<u>dark brown</u>
<u>12 - 24</u>	<u>silt loam</u>	<u>light brown</u>
<u>24 -</u>	<u>silt loam</u>	<u>mottled</u>

<u>Depth</u>	<u>Description</u>	<u>Comments</u>
<u>0 - 12</u>	<u>silt loam</u>	<u>dark brown</u>
<u>12 - 32</u>	<u>silt loam</u>	<u>light brown</u>
<u>32 -</u>	<u>silt loam</u>	<u>mottled</u>

<u>Depth</u>	<u>Description</u>	<u>Comments</u>
<u>0 - 12</u>	<u>silt loam</u>	<u>dark brown</u>
<u>12 - 29</u>	<u>silt loam</u>	<u>light brown</u>
<u>29 -</u>	<u>silt loam</u>	<u>mottled</u>

-MAXIMUM SEASONAL GROUNDWATER ELEVATION

Soil Mottling 23 - 28 Water Table not found
(Depth Found & Degree of Development) (Depth to Standing Water)

COMMENTS: well structured soil

SOIL EVALUATION REPORT

PROPERTY LOCATION Section 4, Township 9N, Range 2W

APPLICANT: Craig and Shirley Moody PHONE: 425-4352

MAILING ADDRESS: 148 View Point Drive, Longview WA 98632
CITY STATE ZIP

SPECIFICATIONS:

FOR 3 BEDROOM DWELLING: SEPTIC TANK 900 GALLON MINIMUM CAPACITY (TWO COMPARTMENT)

TYPE OF WATER SUPPLY: DRAINFIELD 810 SQUARE FEET TOTAL MINIMUM (LENGTH X WIDTH OF TRENCHES)

well
EXISTING _____ PROPOSED X

LAYOUT OF SYSTEM:

NUMBER OF DRAINFIELD LINES: 3 OR _____
LENGTH OF DRAINFIELD LINES: 90 OR _____
WIDTH OF DRAINFIELD LINES: 3 OR _____
TRENCH DEPTH: MINIMUM 18", MAXIMUM 24"
MINIMUM DISTANCE BETWEEN TRENCHES (CENTER TO CENTER): _____

ADDITIONAL REQUIREMENTS:

A 15" thick layer of topsoil fill shall be placed over the drainfield and reserve area and for 10' in all directions (60' x 110')*measured from the surface of the fill.

NOTE:

This approval indicates that this site is suitable for septic tank and drainfield use. A septic tank permit will be issued by the Department of Community Development provided the site meets the requirements of other relevant regulations such as the County Comprehensive Plan, the Subdivision Ordinance, and the Shoreline Management Plan.

- OFFICE COPY
- DCD COPY _____
Date Sent
- APPLICANT'S COPY _____
Date Sent

SUBMITTED BY: *William Or*
DATE 5/9/85

