

Appendix 8-D

Guidance on Widths of Buffers and Ratios for Compensatory Mitigation for Use with the Eastern Washington Wetland Rating System

8D.1 Introduction

This appendix provides guidance on widths of buffers, ratios for compensatory mitigation, and other measures for protecting wetlands that are linked to the *Washington State Wetland Rating System for Eastern Washington: 2014 Update*, Department of Ecology Publication #14-06-030 (October 2014). Refer to Appendix 8-C for guidance for western Washington. Appendices 8-C through 8-F have been formatted similar to the main text of this volume (i.e., with a numbering system) to help with organization.

The tables below list the recommended widths of buffers for various alternatives, examples of measures to minimize impacts, and ratios for compensatory mitigation.

- **Table 8D-1.** Width of buffers needed to protect wetlands in eastern Washington if impacts from land use and wetland functions are NOT incorporated (Buffer Alternative 1). [Page 4]
- **Table 8D-2.** Width of buffers based on wetland category and modified by the intensity of the impacts from changes in proposed land use (Buffer Alternative 2). [Page 5]
- **Table 8D-3.** Types of land uses that can result in high, moderate, and low levels of impacts to adjacent wetlands (used in Buffer Alternatives 2 and 3). [Page 5]
- **Table 8D-4.** Width of buffers needed to protect Category IV wetlands in eastern Washington (Buffer Alternative 3). [Page 6]
- **Table 8D-5.** Width of buffers needed to protect Category III wetlands in eastern Washington (Buffer Alternative 3). [Page 6]
- **Table 8D-6.** Width of buffers needed to protect Category II wetlands in eastern Washington (Buffer Alternative 3). [Page 7]
- **Table 8D-7.** Width of buffers needed to protect Category I wetlands in eastern Washington (Buffer Alternative 3). [Page 8]
- **Table 8D-8.** Examples of measures to minimize impacts to wetlands from different types of activities. [Page 10]

Modified to use with the 2014 Washington State Rating System for Eastern Washington

- **Table 8D-9.** Comparison of recommended buffer widths for high intensity land uses between Alternative 3 (step-wise scale) and Alternative 3A (graduated scale) based on score for habitat functions [Page 14].
- **Table 8D-10.** Comparison of recommended widths for buffers between Alternative 3 and Alternative 3A for proposed land uses with high impacts with mitigation for impacts. [Page 14]
- **Table 8D-11.** Mitigation ratios for projects in eastern Washington. [Page 20]

The guidance in this appendix can be used in developing regulations such as critical areas ordinances for protecting and managing the functions and values of wetlands. The recommendations are based on the analysis of the current scientific literature found in Volume 1. The detailed rationale for the recommendations is provided in Appendices 8-E and 8-F.

The recommendations on buffer widths and mitigation ratios are general, and there may be some wetlands for which these recommendations are either too restrictive or not protective enough. The recommendations are based on the assumption that a wetland will be protected only at the scale of the site itself. They do not reflect buffers and ratios that might result from regulations that are developed based on a larger landscape-scale approach.

8D.2 Widths of Buffers

Requiring buffers of a specific width has been one of the primary methods by which local jurisdictions in Washington have protected the functions and values of wetlands. Generally, buffers are the uplands adjacent to an aquatic resource that can, through various physical, chemical, and biological processes, reduce impacts to wetlands from adjacent land uses. The physical characteristics of buffers (e.g., slope, soils, vegetation, and width) determine how well buffers reduce the adverse impacts of human development. These characteristics are discussed in detail in Chapter 5, Volume 1.

In addition to reducing the impacts of adjacent land uses, buffers also protect and maintain a wide variety of functions and values provided by wetlands. For example, buffers can provide the terrestrial habitats needed by many species of wildlife that use wetlands to meet some of their needs.


The review of the scientific literature has shown, however, that buffers alone cannot adequately protect all functions that a wetland performs. Additional guidance is, therefore, provided on other ways in which wetlands can be managed and regulated to provide some of the necessary protection that buffers alone do not provide. The following guidance for protecting the functions and values of wetlands is based on their category as determined through the rating system for eastern Washington.

Modified to use with the 2014 Washington State Rating System for Eastern Washington

Basic assumptions for using the guidance on widths for buffers

Recommendations for widths of buffers assume that:

- The wetland has been categorized using the *Washington State Wetland Rating System for Eastern Washington: 2014 Update*, Department of Ecology Publication #14-06-030, October 2014. The buffer is vegetated with native plant communities that are appropriate for the *ecoregion* or with a plant community that provides similar functions. Ecoregions denote areas of general similarity in ecosystems and in the type, quality, and quantity of environmental resources. The U.S. Environmental Protection Agency maintains updated maps of ecoregions that are available at <http://www.epa.gov/naaujdh/pages/models/ecoregions.htm> . Ecoregions currently mapped for Washington are: Coast Range, Puget Lowland, Cascades, Eastern Cascades Slopes and Foothills, North Cascades, Columbia Plateau, Blue Mountains, and Northern Rockies.
- If the vegetation in the buffer is disturbed (grazed, mowed, etc.), proponents planning changes to land use that will increase impacts to wetlands need to rehabilitate the buffer with native plant communities that are appropriate for the ecoregion, or with a plant community that provides similar functions.
- The width of the buffer is measured in horizontal distance (see drawing below).



- The buffer will remain relatively undisturbed in the future within the width specified.

Three alternatives for protecting the functions of wetlands using buffers are described in the following sections:

- **Buffer Alternative 1.** Width based only on wetland category.
- **Buffer Alternative 2.** Width based on wetland category and the intensity of impacts from proposed changes in land use.
- **Buffer Alternative 3.** Width based on wetland category, intensity of impacts, and wetland functions or special characteristics. This alternative has two options for determining the widths of buffers when they are based on the score for habitat. Alternative 3 provides three buffer widths based on habitat scores, while Alternative 3A provides a graduated scale of widths for buffers based on habitat scores.

The buffer widths recommended for each alternative were based on the review of scientific information in Volume 1. The guidance in this appendix synthesizes the information about the types and sizes of buffers needed to protect the functions and special characteristics of wetlands.

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Appendices 8-C and 8-D do not provide the metric equivalents for buffer widths even though most of the research on buffers uses the metric scale. This decision was made because most local governments use the English Standard measures. For example, a buffer width is set at 50 feet rather than 15 meters.

8D.2.1 Buffer Alternative 1: Width Based Only on Wetland Category

This alternative, in which the width of buffers is based only on the category of the wetland, is the simplest (Table 8D-1). The width recommended for each category of wetland in Alternative 1 is the widest recommended for that category in both Alternatives 2 and 3 (discussed below). Alternative 1 provides the least flexibility because many different types of wetlands and types of human impacts are combined. For example, not all wetlands that fall into Category I or II need a 300-foot buffer. If no distinctions are made between the wetlands that fall into Category I or II, all wetlands that fall into these categories have to be protected with a 300-foot buffer so adequate protection is provided for those wetlands that do need a buffer this wide. Also, the widths recommended for this alternative are those needed to protect the wetland from proposed land uses that have the greatest impacts since no distinctions between impacts are made.

Table 8D-1. Width of buffers needed to protect wetlands in eastern Washington if impacts from land use and wetland functions are NOT incorporated (Buffer Alternative 1).

Category of Wetland	Widths of Buffers
IV	50 ft
III	150 ft
II	200 ft
I	250 ft

8D.2.2 Buffer Alternative 2: Width Based on Wetland Category and Modified by the Intensity of the Impacts from Proposed Land Use

The second alternative increases the regulatory flexibility by including the concept that not all proposed changes in land uses have the same level of impact (Table 8D-2). For example, one new residence being built on 5 acres of land near a wetland is expected to have a smaller impact than 20 houses built on the same 5 acres. Three categories of impacts from proposed land uses are outlined: land uses that can create high impacts, moderate impacts, and low impacts to wetlands. Different land uses that can cause these levels of impacts are listed in Table 8D-3.

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-2. Width of buffers needed to protect wetlands in eastern Washington considering impacts of proposed land uses (Buffer Alternative 2).

Category of Wetland	Land Use with Low Impact *	Land Use with Moderate Impact *	Land Use with High Impact*
IV	25 ft	40 ft	50 ft
III	75 ft	110 ft	150 ft
II	100 ft	150 ft	200 ft
I	125 ft	190 ft	250 ft
* See Table 8D-3 in this appendix for types of land uses that can result in low, moderate, and high impacts to wetlands.			

Table 8D-3. Types of proposed land use that can result in high, moderate, and low levels of impacts to adjacent wetlands.

Level of Impact from Proposed Change in Land Use	Types of Land Use Based on Common Zoning Designations *
High	<ul style="list-style-type: none"> • Commercial • Urban • Industrial • Institutional • Retail sales • Residential (more than 1 unit/acre) • Conversion to high-intensity agriculture (dairies, nurseries, greenhouses, growing and harvesting crops requiring annual tilling and raising and maintaining animals, etc.) • High-intensity recreation (golf courses, ball fields, etc.) • Hobby farms
Moderate	<ul style="list-style-type: none"> • Residential (1 unit/acre or less) • Moderate-intensity open space (parks with biking, jogging, etc.) • Conversion to moderate-intensity agriculture (orchards, hay fields, etc.) • Paved trails • Building of logging roads • Utility corridor or right-of-way shared by several utilities and including access/maintenance road
Low	<ul style="list-style-type: none"> • Forestry (cutting of trees only) • Low-intensity open space (hiking, bird-watching, preservation of natural resources, etc.) • Unpaved trails • Utility corridor without a maintenance road and little or no vegetation management.
* Local governments are encouraged to land-use designations for zoning that are consistent with these examples.	

8D.2.3 Buffer Alternative 3: Width Based on Wetland Category, Intensity of Impacts, Wetland Functions, or Special Characteristics

The third alternative provides the most flexibility by basing the widths of buffers on three factors: the wetland category, the intensity of the impacts (as used in Alternative 2), and the functions or special characteristics of the wetland that need to be protected as determined through the rating system. The recommended widths for buffers are shown in Tables 8D-4 to 8D-7. Using this alternative, a wetland may fall into more than one category in the table. For example, a forested, riparian, wetland may be rated a Category II wetland because it is a riparian forest, but it may be rated a Category I wetland based on its score for functions.

If a wetland meets more than one of the characteristics listed in Tables 8D-4 to 8D-7, the buffer recommended to protect the wetland is the widest one. For example, if a Category I wetland (Table 8D-7) scores 8 points for habitat and 7 points for water quality functions, a 200-foot buffer is needed for land uses with high impacts because the widths needed to protect habitat are wider than those needed for the other functions.

Table 8D-4. Width of buffers needed to protect Category IV wetlands in eastern Washington (Buffer Alternative 3 for wetlands scoring less than 16 points for all functions).

Wetland Characteristics	Buffer Widths by Impact of Proposed Land Use	Other Measures Recommended for Protection
Score for all 3 basic functions is less than 16 points	Low - 25 ft Moderate – 40 ft High – 50 ft	No recommendations at this time ¹

¹ No information on other measures for protection was available at the time this document was written. The Washington State Department of Ecology will continue to collect new information for future updates to this document.

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-5. Width of buffers needed to protect Category III wetlands in eastern Washington (Buffer Alternative 3 for wetlands scoring 16 - 18 points for all functions or isolated vernal pools).

Wetland Characteristics	Buffer Widths by Impact of Proposed Land Use	Other Measures Recommended for Protection
Moderate level of function for habitat (score for habitat 5 - 7 points)* *If wetland scores 8-9 habitat points, use Table 8D-6 for Category II buffers	Low - 75 ft Moderate – 110 ft High – 150 ft	No recommendations at this time ¹
Score for habitat 3-4 points	Low - 40 ft Moderate – 60 ft High – 80 ft	No recommendations at this time ¹

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-6. Width of buffers needed to protect Category II wetlands in eastern Washington (Buffer Alternative 3 for wetlands scoring 19 - 21 points for all functions or having the “Special Characteristics” identified in the rating system).

Wetland Characteristics	Buffer Widths by Impact of Proposed Land Use (apply most protective if more than one criterion is met)	Other Measures Recommended for Protection
High level of function for habitat (score for habitat 8 - 9 points)	Low - 100 ft Moderate – 150 ft High – 200 ft	Maintain connections to other habitat areas
Moderate level of function for habitat (score for habitat 5 - 7 points)	Low - 75 ft Moderate – 110 ft High – 150 ft	No recommendations at this time ²
High level of function for water quality improvement and low for habitat (score for water quality 8 - 9 points; habitat less than 5 points)	Low - 50 ft Moderate – 75 ft High – 100 ft	No additional surface discharges of untreated runoff
Vernal pool	Low - 100 ft Moderate – 150 ft High – 200 ft OR Develop a regional plan to protect the most important vernal pool complexes – buffers of vernal pools outside protection zones can then be reduced to: Low - 40 ft Moderate – 60 ft High – 80 ft	No intensive grazing or tilling in the wetland
Riparian forest	Buffer width to be based on score for habitat functions or water quality functions	Riparian forest wetlands need to be protected at a watershed or sub-basin scale (protection of the water regime in the watershed) Other protection based on needs to protect habitat and/or water quality functions
Not meeting above characteristics	Low - 50 ft Moderate – 75 ft High – 100 ft	No recommendations at this time ²

² See footnote on the previous page.

October 2014

Modified from Appendix 8-D: Guidance on Buffers and Ratios for Eastern Washington Wetlands in Washington State Volume 2 – Protecting and Managing Wetlands

Ecology Publication No. 05-06-008

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-7. Width of buffers needed to protect Category I wetlands in eastern Washington (Buffer Alternative 3 for wetlands scoring 22 points or more for all functions or having the “Special Characteristics” identified in the rating system).

Wetland Characteristics	Buffer Widths by Impact of Proposed Land Use (apply most protective if more than one criterion is met)	Other Measures Recommended for Protection
Wetlands of High Conservation Value	Low - 125 ft Moderate – 190 ft High – 250 ft	No additional surface discharges to wetland or its tributaries No septic systems within 300 ft Restore degraded parts of buffer
Bogs	Low - 125 ft Moderate – 190 ft High – 250 ft	No additional surface discharges to wetland or its tributaries Restore degraded parts of buffer
Forested	Buffer size to be based on score for habitat functions or water quality functions	If forested wetland scores high for habitat, need to maintain connectivity to other natural areas Restore degraded parts of buffer
Alkali	Low – 100 ft Moderate – 150 ft High – 200 ft	No additional surface discharges to wetland or its tributaries Restore degraded parts of buffer
High level of function for habitat (score for habitat 8 – 9 points)	Low – 100 ft Moderate – 150 ft High – 200 ft	Maintain connections to other habitat areas Restore degraded parts of buffer
Moderate level of function for habitat (score for habitat 5 - 7 points)	Low – 75 ft Moderate – 110 ft High – 150 ft	No recommendations at this time ³
High level of function for water quality improvement (8 - 9 points) and low for habitat (less than 5 points)	Low – 50 ft Moderate – 75 ft High – 100 ft	No additional surface discharges of untreated runoff
Not meeting any of the above characteristics	Low – 50 ft Moderate – 75 ft High – 100 ft	No recommendations at this time ³

³ See footnote on page 6.

October 2014

Modified from Appendix 8-D: Guidance on Buffers and Ratios for Eastern Washington Wetlands in Washington State Volume 2 – Protecting and Managing Wetlands

Ecology Publication No. 05-06-008

8D.2.4 Special Conditions for a Possible Reduction in Buffer Widths

8D.2.4.1 Condition 1: Reduction in Buffer Width Based on Reducing the Intensity of Impacts from Proposed Land Uses

The buffer widths recommended for proposed land uses with high-intensity impacts to wetlands can be reduced to those recommended for moderate-intensity impacts under the following conditions:

- For wetlands that score moderate or high for habitat (5 points or more for the habitat functions), the width of the buffer can be reduced if both of the following criteria are met:
 - 1) A relatively undisturbed, vegetated corridor at least 100 feet wide is protected between the wetland and any other Priority Habitats as defined by the Washington State Department of Fish and Wildlife. The latest definitions of priority habitats and their locations are available on the WDFW web site at: <http://wdfw.wa.gov/hab/phshabs.htm>)

The corridor must be protected for the entire distance between the wetland and the Priority Habitat by some type of legal protection such as a conservation easement.
 - 2) Measures to minimize the impacts of different land uses on wetlands, such as the examples summarized in Table 8D-8, are applied.
- For wetlands that score less than 5 points for habitat, the buffer width can be reduced to that required for moderate land-use impacts by applying measures to minimize the impacts of the proposed land uses (see examples in Table 8D-8).

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-8. Examples of measures to minimize impacts to wetlands from proposed change in land use that have high impacts. (This is not a complete list of measures.)

Examples of Disturbance	Activities and Uses that Cause Disturbances	Examples of Measures to Minimize Impacts
Lights	<ul style="list-style-type: none"> • Parking lots • Warehouses • Manufacturing • Residential 	<ul style="list-style-type: none"> • Direct lights away from wetland
Noise	<ul style="list-style-type: none"> • Manufacturing • Residential 	<ul style="list-style-type: none"> • Locate activity that generates noise away from wetland
Toxic runoff*	<ul style="list-style-type: none"> • Parking lots • Roads • Manufacturing • Residential areas • Application of agricultural pesticides • Landscaping 	<ul style="list-style-type: none"> • Route all new, untreated runoff away from wetland while ensuring wetland is not dewatered • Establish covenants limiting use of pesticides within 150 ft of wetland • Apply integrated pest management
Stormwater runoff	<ul style="list-style-type: none"> • Parking lots • Roads • Manufacturing • Residential areas • Commercial • Landscaping 	<ul style="list-style-type: none"> • Retrofit stormwater detention and treatment for roads and existing adjacent development • Prevent channelized flow from lawns that directly enters the buffer
Change in water regime	<ul style="list-style-type: none"> • Impermeable surfaces • Lawns • Tilling 	<ul style="list-style-type: none"> • Infiltrate or treat, detain, and disperse into buffer new runoff from impervious surfaces and new lawns
Pets and human disturbance	<ul style="list-style-type: none"> • Residential areas 	<ul style="list-style-type: none"> • Use privacy fencing; plant dense vegetation to delineate buffer edge and to discourage disturbance using vegetation appropriate for the ecoregion; place wetland and its buffer in a separate tract
Dust	<ul style="list-style-type: none"> • Tilled fields 	<ul style="list-style-type: none"> • Use best management practices to control dust
<p>* These examples are not necessarily adequate for minimizing toxic runoff if threatened or endangered species are present at the site.</p>		

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

8D.2.4.2 Condition 2: Reductions in Buffer Widths Where Existing Roads or Structures Lie Within the Buffer

Where a legally established, non-conforming use of the buffer exists (such as a road or structure that lies within the width of buffer recommended for that wetland), proposed actions in the buffer may be permitted as long as they do not increase the degree of non-conformity. This means no increase in the impacts to the wetland from activities in the buffer.

For example, if a land use with high impacts (e.g., building an urban road) is being proposed next to a Category II wetland with a moderate level of function for habitat, a 150-foot buffer would be needed to protect functions (see Table 8D-6). If, however, an existing urban road is already present and only 50 feet from the edge of the Category II wetland, the additional 100 feet of buffer may not be needed if the road is being widened. A vegetated buffer on the other side of the road would not help buffer the existing impacts to the wetland from the road. If the existing road is resurfaced or widened (e.g., to add a sidewalk) along the upland edge, without any further roadside development that would increase the degree of non-conformity, the additional buffer is not necessary. The associated increase in impervious surface from widening a road, however, may necessitate mitigation for impacts from stormwater.

If, however, the proposal is to build a new development (e.g., shopping center) along the upland side of the road, the impacts to the wetland and its functions may increase. This would increase the degree of non-conformity. The project proponent would need to provide the additional 100 feet of buffer extending beyond the road or apply buffer averaging (see Section 8D.1.6).

8D.2.4.3 Condition 3: Reduction in Buffer Widths Through an Individual Rural Stewardship Plan

A Rural Stewardship Plan (RSP) is the product of a collaborative effort between rural property owners and a local government to tailor a management plan specific for a rural parcel of land. The goal of a RSP is better management of wetlands than would be achieved through strict adherence to regulations. In exchange, the landowner gains flexibility in the widths of buffers required, in clearing limits, and in other requirements found in the regulations. For example, dense development in rural residential areas can be treated as having a low level of impact when the development of the site is managed through a locally approved RSP. The voluntary agreement includes provisions for restoration, maintenance, and long-term monitoring and specifies the widths of buffers needed to protect each wetland within the RSP.

8D.2.5 Conditions for Increasing the Width of, or Enhancing, the Buffer

8D.2.5.1 Condition 1: Buffer is Not Vegetated with Plants Appropriate for the Region

The recommended widths for buffers are based on the assumption that the buffer is vegetated with a native plant community appropriate for the ecoregion or with one that performs similar functions. If the existing buffer is unvegetated, sparsely vegetated, or vegetated with invasive species that do not perform needed functions, the buffer should either be planted to create the appropriate plant community or the buffer should be widened to ensure that adequate functions of the buffer are provided. Generally, improving the vegetation will be more effective than widening the buffer.

8D.2.5.2 Condition 2: Buffer Has a Steep Slope

The review of the literature (Volume 1) indicates that the effectiveness of buffers at removing pollutants before they enter a wetland decreases as the slope increases. If a buffer is to be based on the score for its ability to improve water quality (see Tables 8D-4 through 8D-7) rather than habitat or other criteria, then the buffer should be increased by 50% if the slope is greater than 30% (a 3-foot rise for every 10 feet of horizontal distance).

8D.2.5.3 Condition 3: Buffer Is Used by Species Sensitive to Disturbance

If the wetland provides habitat for a species that is particularly sensitive to disturbance (such as a threatened or endangered species), the width of the buffer should be increased to provide adequate protection for the species based on its particular, life-history needs. Some buffer requirements for priority species are available on the Washington State Department of Fish and Wildlife web page (<http://wdfw.wa.gov/hab/phsrecs.htm>). The list of priority species for vertebrates is at <http://wdfw.wa.gov/hab/phsvert.htm>; for invertebrates it is at <http://wdfw.wa.gov/hab/phsinvt.htm>. Information on the buffer widths needed by some threatened, endangered, and sensitive species of wildlife is provided in Appendix 8-H.

8D.2.6 Buffer Averaging

The widths of buffers may be averaged if this will improve the protection of wetland functions, or if it is the only way to allow for reasonable use of a parcel. There is no scientific information available to determine if averaging the widths of buffers actually protects functions of wetlands. The authors have concluded that averaging could be allowed in the following situations:

Averaging may not be used in conjunction with any of the other provisions for reductions in buffers listed above (listed above).

Modified to use with the 2014 Washington State Rating System for Eastern Washington

- Averaging to **improve wetland protection** may be permitted when **all** of the following conditions are met:
 - The wetland has significant differences in characteristics that affect its habitat functions, such as a wetland with a forested component adjacent to a degraded emergent component or a “dual-rated” wetland with a Category I area adjacent to a lower rated area
 - The buffer is increased adjacent to the higher-functioning area of habitat or more sensitive portion of the wetland and decreased adjacent to the lower-functioning or less sensitive portion
 - The total area of the buffer after averaging is equal to the area required without averaging
 - The buffer at its narrowest point is never less than 3/4 of the required width
- Averaging to **allow reasonable use** of a parcel may be permitted when **all** of the following are met:
 - There are no feasible alternatives to the site design that could be accomplished without buffer averaging
 - The averaged buffer will not result in degradation of the wetland’s functions and values as demonstrated by a report from a qualified wetland expert (see Appendix 8-G for a definition of a qualified wetland expert)
 - The total buffer area after averaging is equal to the area required without averaging
 - The buffer at its narrowest point is never less than 3/4 of the required width

8D.2.7 Modifying Buffer Widths in Alternative 3 Using a Graduated Scale for the Habitat Functions (Alternative 3A)


Alternative 3 contains recommendations for protecting the habitat functions of wetlands using only three groupings of scores (3-4, 5-7, 8-9). As a result, a one-point difference between 4 and 5 and between 7 and 8 can result in a 50-foot increase in the width of a buffer around a wetland. The habitat scores were divided into three groups to simplify the regulations based on this guidance.

Such a large increase in width with a one-point increase in the habitat score may be contentious. A jurisdiction may wish to reduce the increments in the widths for buffers by developing a more graduated (but inherently more complicated) scale based on the scores for habitat. Table 8D-9 provides one example of a graduated scale for widths of buffers where the width increases for every one-point increase in the habitat score.

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-9. Comparison of widths for buffers in Alternatives 3 (step-wise scale) and 3A (graduated scale) for proposed land uses with high impacts based on the score for habitat functions in eastern Washington.

Points for Habitat from Wetland Rating Form	3	4	5	6	7	8	9
Alternative 3	80	100	150	150	150	200	200
Alternative 3A	80	100	130	155	180	200	200

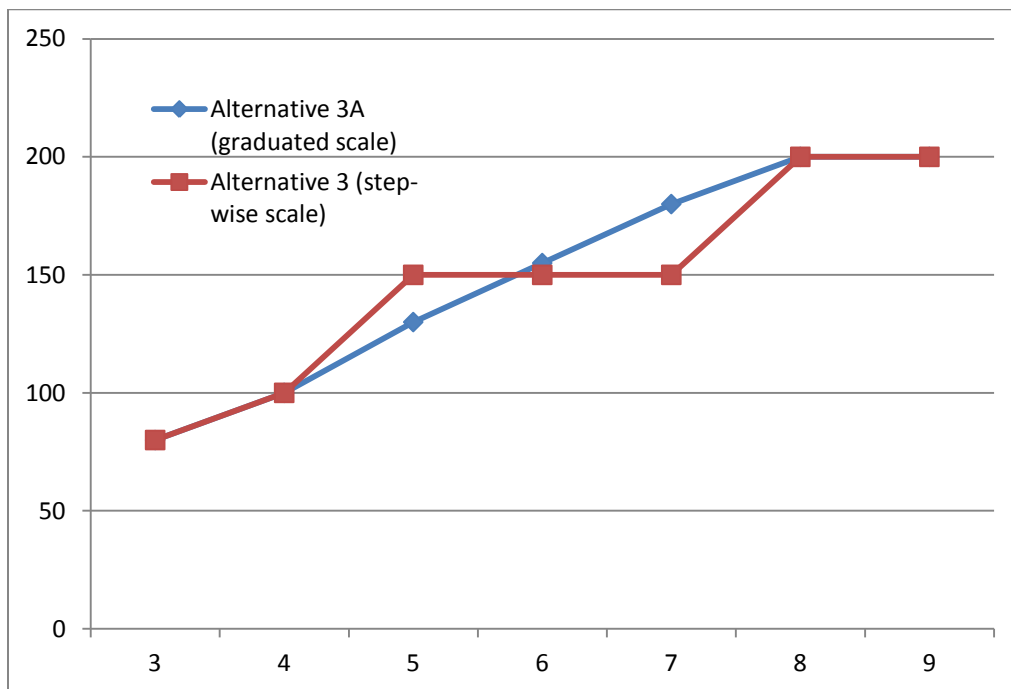

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Other scales are possible as long as they keep within the limits established from the scientific information currently available: wetlands with scores for habitat that are higher than 7 points need buffers that are at least 200 feet wide; wetlands with a score of 5-7 points need buffers of at least 150 feet; and wetlands with a score of 3-4 points need buffers that are at least 80 feet wide.

These buffer widths can be further reduced by 25 percent if a proposed project with high impacts implements mitigation measures such as those described in Table 8D-8. The measures are part of “Condition 1” in Section 8D.1.4 (Special Conditions for a Possible Reduction in Buffer Widths). The buffer widths under Buffer Alternatives 3 and 3A, and the corresponding 25 percent reduction (per buffer reduction condition 1) are shown in Table 8C-10.

Table 8D-10. Comparison of widths for buffers in Alternatives 3 (step-wise scale) and 3A (graduated scale) for proposed land uses with high impacts based on the score for habitat functions in eastern Washington if the impacts are mitigated.

Points for Habitat from Wetland Rating Form	3	4	5	6	7	8	9
Alternative 3 (with mitigation of impacts)	60	75	110	110	110	150	150
Alternative 3A (with mitigation of impacts)	60	75	100	115	135	150	150

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Alternatives 3 and 3A represent two separate approaches for determining widths of buffers for wetlands scoring between 5 and 8 points for the habitat functions. Local governments should select one of the two approaches and should not hybridize the approaches or adopt both at the same time.

8D.3 Ratios for Compensatory Mitigation

When the acreage required for compensatory mitigation is divided by the acreage of impact, the result is a number known variously as a *replacement*, compensation, or *mitigation* ratio. Compensatory mitigation ratios are used to help ensure that compensatory mitigation actions are adequate to offset unavoidable wetland impacts by requiring a greater amount of mitigation area than the area of impact. Requiring greater mitigation area helps compensate for the risk that a mitigation action will fail and for the time lag that occurs between the wetland impact and achieving a fully functioning mitigation site.

8D.3.1 Definitions of Types of Compensatory Mitigation

The ratios presented are based on the type of compensatory mitigation proposed (e.g., restoration, creation, and enhancement). In its *Regulatory Guidance Letter 02-02*, the U.S. Army Corps of Engineers provided definitions for these types of compensatory mitigation. For consistency, the authors of this document use the same definitions which are provided below.

Restoration: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural or historic functions to a former or degraded wetland. For the purpose of tracking net gains in wetland acres, restoration is divided into:

- **Re-establishment:** The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural or historic functions to a **former** wetland. Re-establishment results in a gain in wetland acres (and functions). Activities could include removing fill material, plugging ditches, or breaking drain tiles.
- **Rehabilitation:** The manipulation of the physical, chemical, or biological characteristics of a site with the goal of repairing natural or historic functions of a **degraded** wetland. Rehabilitation results in a gain in wetland function but does not result in a gain in wetland acres. Activities could involve breaching a dike to reconnect wetlands to a floodplain or return tidal influence to a wetland.

Creation (Establishment): The manipulation of the physical, chemical, or biological characteristics present to develop a wetland on an upland or deepwater site where a wetland did not previously exist. Establishment results in a gain in wetland acres. Activities typically involve excavation of upland soils to elevations that will produce a wetland hydroperiod, create hydric soils, and support the growth of hydrophytic plant species.

Enhancement: The manipulation of the physical, chemical, or biological characteristics of a wetland site to heighten, intensify, or improve specific function(s) or to change the

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

growth stage or composition of the vegetation present. Enhancement is undertaken for specified purposes such as water quality improvement, flood water retention, or wildlife habitat. Enhancement results in a change in some wetland functions and can lead to a decline in other wetland functions, but does not result in a gain in wetland acres. Activities typically consist of planting vegetation, controlling non-native or invasive species, modifying site elevations or the proportion of open water to influence hydroperiods, or some combination of these activities.

Protection/Maintenance (Preservation): Removing a threat to, or preventing the decline of, wetland conditions by an action in or near a wetland. This includes the purchase of land or easements, repairing water control structures or fences, or structural protection such as repairing a barrier island. This term also includes activities commonly associated with the term *preservation*. Preservation does not result in a gain of wetland acres, may result in a gain in functions, and will be used only in exceptional circumstances.

Distinction between rehabilitation and enhancement

The distinction between rehabilitation and enhancement as defined above is not clear-cut and can be hard to understand. Actions that rehabilitate or enhance wetlands span a continuum of activities that cannot be defined by specific criteria.

Rehabilitation ←————→ *Enhancement*

In general, rehabilitation involves actions that are more sustainable and that reinstate environmental processes, both at the site and landscape scale (e.g., reinstating hydrologic processes in a diked floodplain by breaching the dikes). Rehabilitation actions often focus on restoring environmental processes that have been disturbed or altered by previous or ongoing human activity. Ecology further defines *rehabilitation* as:

- Actions that restore the original hydrogeomorphic (HGM) class, or subclass, to a wetland whose current HGM class, or subclass, has been changed by human activities
- Actions that restore the water regime that was present and maintained the wetland before human activities changed it

Any other actions taken in existing wetlands would be considered *enhancement*. Enhancement typically involves actions that provide gains in only one or a few functions and can lead to a decline in other functions. Enhancement actions often focus on structural or superficial improvements to a site and generally do not address larger-scale environmental processes.

For example, a wetland that was once a forested, riverine wetland was changed to a depressional, emergent wetland by the construction of a dike and through grazing. Rehabilitating the wetland would involve breaching the dike so the wetland becomes a riverine wetland again, discontinuing the grazing, and reforesting the area. Discontinuing the grazing and reforesting the wetland without re-establishing the links to the riverine system would be considered enhancement.

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Basic assumptions for using the guidance on ratios

- The ratios are for a compensatory mitigation project that is concurrent with impacts to wetlands. If impacts are to be mitigated by using an approved and established mitigation bank, the rules and ratios applicable to the bank should be used.
- The ratios are based on the assumption that the category (based on the rating system for eastern Washington) and hydrogeomorphic (HGM) class or subclass of the wetland proposed as compensation are the same as the category and HGM class or subclass of the affected wetland (e.g., impacts to a Category II, riverine wetland are compensated by creating, restoring, or enhancing a Category II riverine wetland).
- Ratios for projects in which the category and HGM class or subclass of wetlands proposed as compensation is not the same as that of the wetland affected will be determined on a case-by-case basis using the recommended ratios as a starting point. The ratios could be higher in such cases.
- The ratio for using rehabilitation as compensation is 2 times that for using re-establishment or creation (R/C) (2 acres of rehabilitation are equivalent to 1 acre of R/C). The ratio for using enhancement as compensation is 4 times that for using R/C (4 acres of enhancement are equivalent to 1 acre of R/C).
- Re-establishment or creation can be used in combination with rehabilitation or enhancement. For example, 1 acre of impact to a Category III wetland would require 2 acres of R/C. If an applicant provides 1 acre of R/C (i.e., replacing the lost acreage at a 1:1 ratio), the remaining 1 acre of R/C necessary to compensate for the impact could be substituted with 2 acres of rehabilitation or 4 acres of enhancement.
- Generally the use of enhancement alone as compensation is discouraged. Using enhancement in combination with the replacement of wetland area at a minimum of 1:1 through re-establishment or creation is preferred.

These ratios were developed to provide a starting point for further discussions with each proponent of compensatory mitigation. They are based on the observations of the success and risk of compensatory mitigation, as reviewed in Volume 1, and do not represent the specific risk or opportunities of any individual project.

As noted above, the ratios for compensatory mitigation are based on the assumption that the category and hydrogeomorphic (HGM) class or subclass of the affected wetland and the mitigation wetland are the same. The ratios may be adjusted either up or down if the category or HGM class or subclass of the wetland proposed for compensation is different. For example, ratios may be lower if impacts to a Category IV wetland are to be mitigated by creating a Category II wetland. The same is true for impacts to wetlands that currently would be considered *atypical* (see definition below).

Also, compensatory mitigation should not result in the creation, restoration, or enhancement of an atypical wetland. An atypical wetland is defined as a wetland whose design does not match the type of wetland that would be found in the geomorphic setting

Modified to use with the 2014 Washington State Rating System for Eastern Washington

of the proposed site (i.e., the water source(s) and hydroperiod proposed for the mitigation site are not typical for the geomorphic setting). In addition, any designs that provide exaggerated morphology or require a berm or other engineered structures to hold back water would be considered atypical. For example, excavating a permanently inundated pond in an existing seasonally saturated or inundated wetland is one example of an enhancement project that could result in an atypical wetland. Another example would be excavating depressions in an existing wetland on a slope that required the construction of berms to impound water.

On a case-by-case basis, it is possible to use the scores from the Washington State wetland rating system to compare functions between the mitigation wetland and the impacted wetland. This information may also be used to adjust replacement ratios. Scores from the methods for assessing wetland functions (Hruby et al. 1999) provide another option to establish whether the functions lost will be replaced if both the affected wetland and the wetland used for compensation are of the same HGM class and subclass.

Mitigation ratios for projects in eastern Washington are shown in Table 8D-11. Refer to the text box on the basic assumptions on the previous page before reading the table. As mentioned previously, these ratios were developed to provide a starting point for further discussions with each proponent of compensatory mitigation. They only factor in the observations of mitigation success and risk at a programmatic level, and do not represent the specific risk or opportunity of any individual project.

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

Table 8D-11: Mitigation ratios for projects in eastern Washington.

Category and Type of Wetland Impacts	Re-establishment or Creation	Rehabilitation Only⁴	Re-establishment or Creation (R/C) and Rehabilitation (RH)⁴	Re-establishment or Creation (R/C) and Enhancement (E)⁴	Enhancement Only⁴
All Category IV	1.5:1	3:1	1:1 R/C and 1:1 RH	1:1 R/C and 2:1 E	6:1
All Category III	2:1	4:1	1:1 R/C and 2:1 RH	1:1 R/C and 4:1 E	8:1
Category II Forested	4:1	8:1	1:1 R/C and 4:1 RH	1:1 R/C and 6:1 E	16:1
Category II Vernal pool	2:1 Replacement has to be seasonally ponded wetland	4:1 Replacement has to be seasonally ponded wetland	1:1 R/C and 2:1 RH	Case-by-case	Case-by-case
All other Category II	3:1	6:1	1:1 R/C and 4:1 RH	1:1 R/C and 8:1 E	12:1
Category I Forested	6:1	12:1	1:1 R/C and 10:1 RH	1:1 R/C and 20:1 E	24:1
Category I based on score for functions	4:1	8:1	1:1 R/C and 6:1 RH	1:1 R/C and 12:1 E	16:1
Category I Natural Heritage site	Not considered possible ⁵	6:1 Rehabilitation of a Natural Heritage site	R/C Not considered possible ⁵	R/C Not considered possible ⁵	Case-by-case
Category I Alkali	Not considered possible ⁵	6:1 rehabilitation of an alkali wetland	R/C Not considered possible ⁵	R/C Not considered possible ⁵	Case-by-case
Category I Bog	Not considered possible ⁵	6:1 Rehabilitation of a bog	R/C Not considered possible ⁵	R/C Not considered possible ⁵	Case-by-case
NOTE: Preservation is discussed in the following section.					

⁴ These ratios are based on the assumption that the rehabilitation or enhancement actions implemented represent the average degree of improvement possible for the site. Proposals to implement more effective rehabilitation or enhancement actions may result in a lower ratio, while less effective actions may result in a higher ratio. The distinction between rehabilitation and enhancement is not clear-cut. Instead, rehabilitation and enhancement actions span a continuum. Proposals that fall within the gray area between rehabilitation and enhancement will result in a ratio that lies between the ratios for rehabilitation and the ratios for enhancement.

⁵ Natural Heritage sites, alkali wetland, and bogs are considered irreplaceable wetlands because they perform some special functions that cannot be replaced through compensatory mitigation. Impacts to such wetlands would therefore result in a net loss of some functions no matter what kind of compensation is proposed.

8D.3.2 Conditions for Increasing or Reducing Replacement Ratios

Increases in replacement ratios are appropriate under the following circumstances:

- Success of the proposed restoration or creation is uncertain
- A long time will elapse between impact and establishment of wetland functions at the mitigation site
- Proposed mitigation will result in a lower category wetland or reduced functions relative to the wetland being impacted
- The impact was unauthorized

Reductions in replacement ratios are appropriate under the following circumstances:

- Documentation by a qualified wetland specialist (see Appendix 8-H) demonstrates that the proposed mitigation actions have a very high likelihood of success based on prior experience
- Documentation by a qualified wetland specialist demonstrates that the proposed actions for compensation will provide functions and values that are significantly greater than the wetland being affected
- The proposed actions for compensation are conducted in advance of the impact and are shown to be successful
- In wetlands where several HGM classes are found within one delineated boundary, the areas of the wetlands within each HGM class can be scored and rated separately and the ratios adjusted accordingly if **all of the following** apply:
 - The wetland does not meet any of the criteria for wetlands with “Special Characteristics” as defined in the rating system
 - The rating and score for the entire wetland is provided as well as the scores and ratings for each area with a different HGM class
 - Impacts to the wetland are all within an area that has a different HGM class from the one used to establish the initial category
 - The proponents provide adequate hydrologic and geomorphic data to establish that the boundary between HGM classes lies at least 50 feet outside of the footprint of the impacts

8D.3.3 Replacement Ratios for Preservation

In some cases, preservation of existing wetlands may be acceptable as compensation for wetland losses. Acceptable sites for preservation include those that:

- Are important due to their landscape position
- Are rare or limited wetland types
- Provide high levels of functions

Ratios for preservation in combination with other forms of mitigation generally range from 10:1 to 20:1, as determined on a case-by-case basis, depending on the quality of the wetlands being impacted and the quality of the wetlands being preserved. Ratios for preservation as the sole means of mitigation generally start at 20:1. Specific ratios will depend upon the significance of the preservation project and the quality of the wetland resources lost.

Please see Chapter 8 (Section 8.3.7.2) and Appendix 8-B for more information on preservation and the criteria for its use as compensation.

8D.3.4 Replacement Ratios for Temporal Impacts and Conversions

When impacts to wetlands are not permanent, local governments often require some compensation for the temporal loss of wetland functions. *Temporal impacts* refer to impacts to those functions that will eventually be replaced but cannot achieve similar functionality in a short time. For example, clearing forested wetland vegetation for pipeline construction could result in the temporal loss of functions, such as song bird habitat provided by the tree canopy. It may take over 20 years to re-establish the level of function lost as a result of clearing the trees. Although the wetlands will be re-vegetated and over time it is anticipated that their previous level of functioning will be re-established, a temporal loss of functions will occur. There is also some risk of failure associated with the impacts or alterations, especially when soil is compacted by equipment, deep excavation is required, and pipeline trenches alter the water regime at the site.

Therefore, in addition to restoring the affected wetland to its previous condition, local governments should consider requiring compensation to account for the risk and temporal loss of wetland functions. Generally, the ratios for temporal impacts to forested and scrub-shrub wetlands are one-quarter of the recommended ratios for permanent impacts (refer to Table 8D-11), provided that the following measures are satisfied:

- An explanation of how hydric soil, especially deep organic soil, is stored and handled in the areas where the soil profile will be severely disturbed for a fairly significant depth or time

**Modified to use with the 2014 Washington State Rating System
for Eastern Washington**

- Surface and groundwater flow patterns are maintained or can be restored immediately following construction
- A 10-year monitoring and maintenance plan is developed and implemented for the restored forest and scrub-shrub wetlands
- Disturbed buffers are re-vegetated and monitored
- Where appropriate, the hydroseed mix to be applied on re-establishment areas is identified

When impacts are to a native emergent community and there is a potential risk that its re-establishment will be unsuccessful, compensation for temporal loss and the risk should be required in addition to restoring the affected wetland and monitoring the site. If the impacts are to wetlands dominated by non-native vegetation (e.g., blackberry, reed canarygrass, or pasture grasses), restoration of the affected wetland with native species and monitoring after construction is generally all that is required.

Loss of functions due to the permanent conversion of wetlands from one type to another also requires compensation. When wetlands are not completely lost but are converted to another type, such as a forested wetland converted to an emergent or shrub wetland (e.g., for a utility right-of-way), some functions are lost or reduced.

The ratios for conversion of wetlands from one type to another will vary based on the degree of the alteration, but they are generally one-half of the recommended ratios for permanent impacts (refer to Table 8D-11).

Refer to Appendix 8-F for the rationale for the ratios provided in this appendix.