

Inspect Your Dangerous Waste Drums

TIGHTEN BUNGS

Keep bungs tight except when adding waste to the container.

GROUND DRUMS

Prevent igniting flammable waste by grounding drums.

AISLE SPACE

Leave at least 30" of aisle space between rows of drums. Rows must be no more than two drums wide.

LATCH FUNNELS

Keep funnels closed and latched when not in use. Funnels must be screwed in with gaskets.

TIGHTEN LIDS


Make sure contents cannot spill if tipped over.

LABEL IT

Labels must be visible.

NO LEAKS

Keep drums free of corrosion, bulges, and other damage.

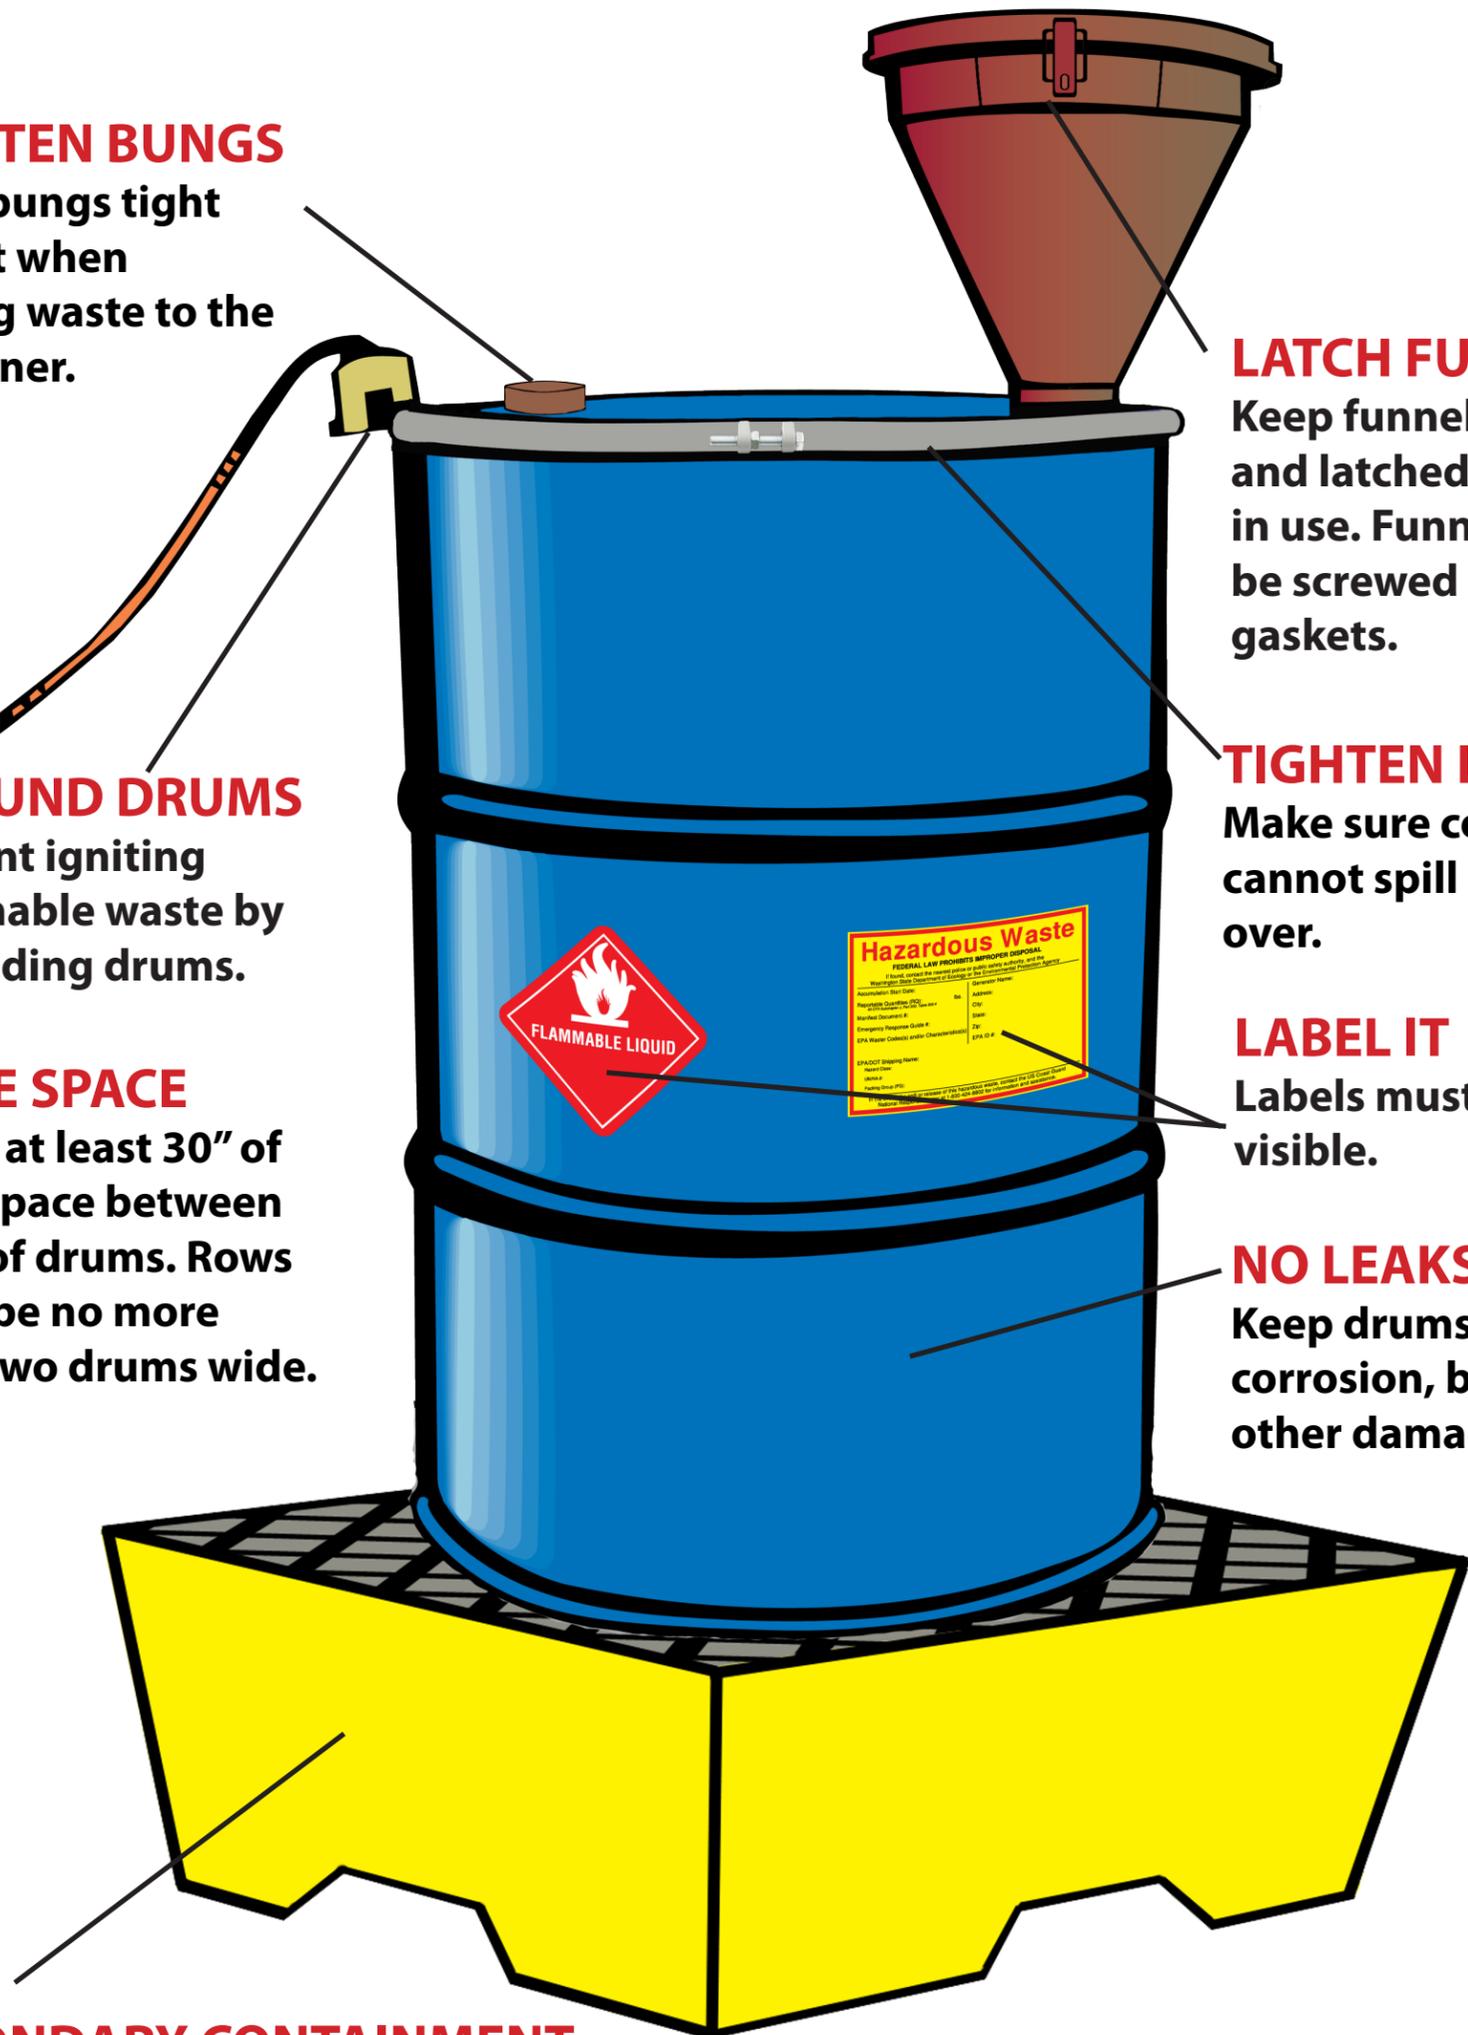

SECONDARY CONTAINMENT

Secondary containment must be large enough to contain 10% of the free liquid in all containers or 100% of the free liquid in the largest container, whichever is larger.

Dangerous Waste: Do It Right!

Questions? Please call your regional dangerous waste specialist at the Department of Ecology.

For more information about managing dangerous waste, visit us online:
www.ecy.wa.gov/programs/hwtr/managewaste.html

