

**271-T CAGE  
ADDENDUM H  
CLOSURE PLAN  
CHANGE CONTROL LOG**

Change Control Logs ensure that changes to this unit are performed in a methodical, controlled, coordinated, and transparent manner. Each unit addendum will have its own change control log with a modification history table. The “**Modification Number**” represents Ecology’s method for tracking the different versions of the permit. This log will serve as an up to date record of modifications and version history of the unit.

Modification History Table

Modification Date	Modification Number
12/06/2021	8C.2021.1F

This page intentionally left blank.

1  
2  
3  
4  
5  
6

**271-T CAGE  
ADDENDUM H  
CLOSURE PLAN**

1  
2  
3  
4  
5

This page intentionally left blank.

**ADDENDUM H  
CLOSURE PLAN**

**TABLE OF CONTENTS**

H.1	Introduction .....	7
H.1.1	Unit Description .....	8
H.1.2	Maximum Waste Inventory .....	10
H.1.3	Personnel Safety and Training Requirements.....	10
H.1.3.1	Health and Safety Requirements .....	10
H.1.3.2	Training Requirements .....	11
H.1.4	Maintenance and Security During Closure.....	12
H.1.4.1	Inspections .....	12
H.1.4.2	Facility Security.....	12
H.1.4.3	Preparedness, Prevention, Emergency Procedures .....	13
H.1.4.4	Facility Recordkeeping.....	13
H.1.5	Facility Contact Information.....	14
H.2	Closure Performance Standards.....	14
H.3	Closure Activities .....	14
H.3.1	Removal of Wastes and Waste Residues.....	15
H.3.2	Operating Records Review and Visual Inspection .....	15
H.3.3	Unit Components, Parts, and Ancillary Equipment.....	17
H.3.4	Decontamination.....	17
H.3.5	Identifying and Managing Contaminated Environmental Media .....	17
H.3.6	Identifying and Managing Waste Generated During Closure.....	18
H.3.7	Closure Performance Standards for Soil.....	18
H.3.8	Closure Performance Standards for Concrete.....	19
H.3.9	Development of Closure Performance Standards .....	20
H.3.10	Conditions That Will be Achieved When Closure is Complete .....	25
H.4	Sampling and Analysis Plan .....	25
H.4.1	Sampling and Analysis Plan Requirements .....	25
H.4.2	Sampling and Analysis Schedule.....	25
H.4.3	Project Management .....	26
H.4.3.1	Project/Task Organization .....	26
H.4.3.2	Field Sampler Training/Certification.....	27

1	H.4.3.3	Sampling Documents and Records .....	27
2	H.4.4	Sampling Design and Analysis .....	28
3	H.4.4.1	Sampling Process Design .....	28
4	H.4.4.2	Sampling Methods and Handling .....	30
5	H.4.4.3	Sampling and Analysis Requirements to Address Removal of Contaminated Soil and	
6		Concrete.....	33
7	H.4.4.4	Analytical Methods.....	33
8	H.4.4.5	Quality Control .....	34
9	H.4.5	Data Review, Verification, Validation, and Usability Requirements .....	35
10	H.4.5.1	Data Verification .....	35
11	H.4.5.2	Data Validation.....	35
12	H.4.5.3	Data Quality Assessment.....	36
13	H.4.6	Revisions to the Sampling and Analysis Plan and Constituents to be Analyzed.....	36
14	H.5	Confirmation and Certification of Closure Activities.....	36
15	H.5.1	Confirmation of Clean Closure.....	36
16	H.5.1.1	Confirmation of Site-Specific Decontamination .....	36
17	H.5.1.2	Confirmation of Soil Sample Results .....	37
18	H.5.2	Role of the Independent Qualified Registered Professional Engineer.....	37
19	H.5.3	Closure Certification.....	37
20	H.6	Closure Schedule and Time Frame .....	38
21	H.7	Closure Costs .....	40
22	H.8	References .....	40

23

## 24 TABLES

25	Table H-1	Training Matrix for the 271-T Cage Dangerous Waste Management Unit .....	11
26	Table H-2	271-T Cage Inspection Schedule .....	12
27	Table H-3	Operating Records Review Summary .....	16
28	Table H-4	Closure Performance Standards for Soil and Concrete and Analytical Performance	
29		Requirements .....	21
30	Table H-5	Preservation, Container, and Holding Time Requirements for Soil and Concrete	
31		Samples .....	31
32	Table H-6	Project Quality Control Sampling Summary .....	34
33	Table H-7	271-T Cage Dangerous Waste Management Unit Closure Schedule.....	38

34

**FIGURES**

Figure H-1 T Plant Complex Overview, 271-T Cage Dangerous Waste Management Unit..... 8

Figure H-2 T Plant 271-T Cage Outdoor Container Storage Area (May 2017)..... 9

Figure H-3 T Plant 271-T Cage Outdoor Container Storage Area (May 2017)..... 10

Figure H-4 Sampling and Analysis Plan Project Organization ..... 27

Figure H-5 271-T Cage Sampling Locations ..... 30

Figure H-6 271-T Cage Closure Schedule Activities..... 40

**ATTACHMENTS**

Attachment A T Plant 271-T Cage Visual Inspection Supporting Documentation ..... H.A.i

Attachment B T Plant 271-T Cage Visual Sample Plan Supporting Documentation .....H.B.i

1

## TERMS

ASTM	American Society for Testing and Materials
CAA	Central Accumulation Area
COC	Chain-of-Custody
CPCCo	Central Plateau Cleanup Company, LLC
DOE	U.S. Department of Energy
DOE-RL	U.S. Department of Energy, Richland Operations Office
DQA	Data Quality Assessment
DQO	Data Quality Objectives
DWMU	Dangerous Waste Management Unit
Ecology	Washington State Department of Ecology
EPA	U.S. Environmental Protection Agency
FWS	Field Work Supervisor
HEIS	Hanford Environmental Information System
HHE	Human Health and the Environment
HWMA	Hazardous Waste Management Act (RCW 70A.300, WAC 173-303)
IQRPE	Independent Qualified Registered Professional Engineer
MTCA	Model Toxics Control Act—Cleanup (RCW 70A.305, WAC 173-340)
PQL	Practical Quantitation Limit
QA	Quality Assurance
QC	Quality Control
RCRA	<i>Resource Conservation and Recovery Act of 1976</i>
RCW	Revised Code of Washington
SAA	Satellite Accumulation Area
SAP	Sampling and Analysis Plan
SWOC	Solid Waste Operations Complex
VOA	Volatile Organic Analysis
VSP	Visual Sample Plan

2



## H.1 Introduction

The purpose of this plan is to describe the *Resource Conservation and Recovery Act of 1976* (RCRA)/Hazardous Waste Management Act (HWMA), Chapter 70A.300 Revised Code of Washington (RCW) closure process for the 271-T Cage Dangerous Waste Management Unit (DWMU), hereinafter called the 271-T Cage. The 271-T Cage is located in the central portion of the T Plant Complex in the 200 West Area of the Hanford Site (Figure H-1). The U.S. Department of Energy (DOE) and Central Plateau Cleanup Company (CPCCo), hereinafter called the Permittees, have agreed with the U.S. Environmental Protection Agency (EPA) and Washington State Department of Ecology (Ecology) through a Consent Agreement and Final Order (EPA Docket No. RCRA-10-2013-0113) to close this DWMU. The 271-T Cage is no longer used for storage of dangerous or mixed waste and will be clean closed.

This closure plan complies with closure requirements in Washington Administrative Code (WAC) 173-303-610(2) through WAC 173-303-610(6), *Closure and post-closure*, and WAC 173-303-630(10), *Use and management of containers*.

Amendments to this closure plan must be submitted as a permit modification request in accordance with Permit Condition I.C.3.

Minor deviations from this closure plan must be addressed in accordance with Permit Condition II.K.6.

Closure requirements are based on RCW 70A.300, WAC 173-303, and Ecology guidance (Ecology Publication #94-111, *Guidance for Clean Closure of Dangerous Waste Units and Facilities*). This closure plan is also designed to fulfill the elements of the Data Quality Objectives (DQO) Process, as defined in EPA Publication EPA/240/B-06/001, *Guidance on Systematic Planning Using the Data Quality Objectives Process* (EPA QA/G-4). A site-specific DQO has been incorporated into this closure plan.

This closure plan describes in detail the closure activities necessary to achieve closure performance standards for the 271-T Cage. Closure activities include:

- Removal of all dangerous and mixed waste.
- Records review (i.e., container storage, operating, and inspection records) for documented spills or releases of dangerous or mixed waste and subsequent cleanup activities.
- Visual inspection to evaluate the condition of the concrete surface and the likelihood of potential exposure pathways for contamination of the underlying soil.
- Decontamination of the concrete surface using an Ecology-approved site-specific decontamination method.
- Chip sampling of the concrete surface to evaluate whether decontamination was successful and closure performance standards are met.
- Sampling of underlying soil to evaluate whether closure performance standards are met.
- Transmit closure certification to Ecology.

Closure will be performed in accordance with the schedule provided in Section H.6.



**Figure H-1 T Plant Complex Overview,  
271-T Cage Dangerous Waste Management Unit (Month Unknown, 2017)**

### **H.1.1 Unit Description**

The 271-T Cage (Figure H-2 and Figure H-3) is adjacent to the north side of the T Plant Complex, 271-T Building. The 271-T Cage area is an uncoated concrete surface approximately 6 m (20 ft) long by 3 m (10 ft) wide. The 271-T Cage is defined on the south side by the 271-T Building and the remaining three sides by metal chain-link fence material. The 271-T Cage area is covered with corrugated metal roofing material.

The 271-T Cage may have been used to manage dangerous or mixed waste as a Central Accumulation Area (CAA) or Satellite Accumulation Area (SAA). The 271-T Cage does not currently store dangerous or mixed waste. Future storage of dangerous or mixed waste is not authorized within the 271-T Cage DWMU.



1

**Figure H-2 T Plant 271-T Cage Outdoor Container Storage Area (May 2017)**





**Figure H-3 T Plant 271-T Cage Outdoor Container Storage Area (May 2017)**

## **H.1.2 Maximum Waste Inventory**

No dangerous waste permitted storage was identified during the T Plant operating records review (Section H.3.2); therefore, no maximum waste inventory is presented. Weekly waste management area inspection records identified that the 271-T Cage may have managed dangerous or mixed waste.

## **H.1.3 Personnel Safety and Training Requirements**

Closure will be performed in a manner to ensure the safety of Human Health and the Environment (HHE). Health and safety requirements are addressed in Section H.1.3.1 and training for facility and closure personnel is described in Section H.1.3.2.

### **H.1.3.1 Health and Safety Requirements**

Personnel will be trained in the applicable safety and environmental procedures described in Table H-1. Personnel will be equipped with appropriate personal protective equipment. Personnel will perform all field operations and any necessary closure activities in compliance with applicable health, safety, and environmental procedures and requirements.

Pre-job briefings will be performed to evaluate activities and associated hazards by considering the following factors:

- Objective of the activities.
- Individual tasks to be performed.
- Hazards associated with the planned tasks.
- Environment in which the job will be performed.
- Facility where the job will be performed.
- Equipment and material required.
- Safety protocols applicable to the job.
- Training requirements for individuals assigned to perform the work.
- Level of management control.
- Proximity of emergency contacts.

### H.1.3.2 Training Requirements

The Permittees have instituted training and qualification programs to meet training requirements imposed by regulations, DOE orders, and national standards such as those published by the American National Standards Institute/American Society of Mechanical Engineers. For example, the environmental, safety, and health training program provides workers with the knowledge and skills necessary to execute assigned duties safely. Permit Attachment 5, *Hanford Facility Personnel Training Program*, describes specific requirements for the Hanford Facility Personnel Training Program. The Permittees will comply with the training matrix shown in Table H-1, which provides training requirements for Hanford Facility personnel associated with the 271-T Cage.

Project-specific safety training will provide the knowledge and skills that personnel need to perform work safely and in accordance with Quality Assurance (QA) requirements. Training records are maintained for each employee in an electronic training record database. The Permittee's training organization maintains the training records system.

**Table H-1 Training Matrix for the 271-T Cage Dangerous Waste Management Unit**

Training Category Course Description <sup>a</sup>	Frequency of Training	Training Type <sup>b</sup>	Job Title/Position					
			Non-T Plant Personnel or Visitor	FWS	SPOC	ECO	BED	FS
General Training	Annual	GHFT, CPT	X	X	X	X	X	X
Building Emergency	Annual	ECT					X	
ECO Training	Initial	OT				X		
Facility Health and Safety	Annual	GHFT, CPT	X <sup>c</sup>	X	X <sup>c</sup>	X	X	X <sup>c</sup>
Sampler	Annual	GHFT, CPT						X

**Table H-1 Training Matrix for the 271-T Cage Dangerous Waste Management Unit**

Training Category Course Description <sup>a</sup>	Frequency of Training	Training Type <sup>b</sup>	Job Title/Position					
			Non-T Plant Personnel or Visitor	FWS	SPOC	ECO	BED	FS

<sup>a</sup>The T Plant Complex Dangerous Waste Training Plan provides a complete description of coursework in each training category.

<sup>b</sup>Training types defined in Permit Attachment 5.

<sup>c</sup>This training is required only if workers are unescorted in the facility.

BED = Building emergency director

FWS = Field work supervisor

CPT = Contingency plan training

GHFT = General Hanford facility training

ECO = Environmental compliance officer

OT = Operations training

ECT = Emergency coordinator training

SPOC = Single point of contact

FS = Field sampler

## H.1.4 Maintenance and Security During Closure

To maintain the 271-T Cage in a compliant manner during closure, measures are taken to ensure inspections are performed and security and emergency preparedness activities are in place.

### H.1.4.1 Inspections

The 271-T Cage will be closed in a manner that demonstrates that all steps to prevent threats to HHE have been met and will continue to be taken. After closure activities have been completed, the 271-T Cage will be inspected annually until Ecology approves the unit closure certification. Table H-2 shows annual inspection requirements that will be performed.

**Table H-2 271-T Cage Inspection Schedule**

Requirement Description	Frequency	DWMU Condition*
Signage	Annual	Warning signs are present and clearly legible.
Site – General	Annual	There is no evidence that unusual conditions exist at the closing DWMU site.

\*The storage area is empty of dangerous and mixed waste. "No waste in storage" or equivalent words will be entered on the inspection log.

### H.1.4.2 Facility Security

The following sections document security measures in effect at the T Plant Complex.

#### H.1.4.2.1 Security Provisions

Located within the 200 West Area of the Hanford Facility, the T Plant Complex complies with access control and warning sign requirements pursuant to WAC 173-303-310(1) and (2), *Security*.

Security measures are used to control access to the active portions of the Hanford Facility in accordance with Permit Condition II.M, *Security*.

The entire Hanford Facility is a controlled access area as described in Permit Attachment 3, *Security*. The security measures in Permit Attachment 3 and the unit-specific security measures prevent the unknowing entry, and minimize the possibility for the unauthorized entry, of persons or livestock.

[WAC 173-303-310(1)]

#### **H.1.4.2.2 T Plant Complex Access Control**

Unknown entry and the possibility for unauthorized entry of persons or livestock onto the active portions of the T Plant Complex are minimized through implementation and maintenance of the following security measures.

Access to T Plant DWMUs is controlled by an approximate 2.4 m (8 ft) high chain-link fence encircling the operating boundary (Figure H-1). A two-part swinging chain link gate at the T Plant main entrance is open during operational hours to allow vehicle and personnel ingress to the parking lot and outdoor areas. Signs are posted at the main entrance instructing all visitors to check in at 271-T Building. This gate is closed and locked when personnel are away from T Plant. Alternate vehicle access gates, found about the fenced perimeter, are closed and locked except when in use. Keys to gates are controlled and accessible only by authorized personnel. [WAC 173-303-310(2)(c)]

Upon arrival at T Plant, visitors are required to sign in at the 271-T Building administration office, and must adhere to all personal protection requirements, and are subject to escorting protocols.

Section H.1.3.2 provides the personnel training requirements for T Plant Complex operators, workers, and visitors.

Access to the 271-T Cage is restricted by the structure enclosing the area, with appropriate signage.

#### **H.1.4.2.3 Warning Signs**

Warning signs stating “Danger-Unauthorized Personnel Keep Out” are posted near the entrance gate of the T Plant Complex. Identical signs are posted along the perimeter fence lines at distances not to exceed 250 ft (76.2 m) between signs. Permittees must maintain warning signs at points described in this closure plan and ensure that signs are written in English, legible from a distance of 25 ft (approximately 7.6 m) or more, and visible from all angles of approach. [WAC 173-303-310(2)(a)]

#### **H.1.4.3 Preparedness, Prevention, Emergency Procedures**

T Plant preparedness, prevention, and emergency procedures are described in the following subsections. Contingency information is contained in the Building Emergency Plan for the T Plant Complex, as well as Permit Attachment 4, *Hanford Emergency Management Plan*.

##### **H.1.4.3.1 T Plant Building Emergency Plan**

The T Plant Complex is within the Hanford Facility. The Building Emergency Plan for the T Plant Complex describes facility-specific hazards and emergency planning and response. This site-specific plan is intended to be used in conjunction with Permit Attachment 4, *Hanford Emergency Management Plan*. If an emergency occurs, the on-call Building Emergency Director will be notified, and the requirements associated with Permit Attachment 4, *Hanford Emergency Management Plan*, and the T Plant Complex Building Emergency Plan will be implemented. A copy of the T Plant Complex Building Emergency Plan is kept in the operating record.

##### **H.1.4.3.2 Hanford Emergency Management Plan**

Permit Attachment 4, *Hanford Emergency Management Plan*, addresses site emergency management and contingency plan requirements for the Hanford Facility.

##### **H.1.4.4 Facility Recordkeeping**

Historical records that describe dangerous and mixed waste management activities within the 271-T Cage are retained in the operating record, which ensures proper availability and retention periods. These records describe the source of the chemicals, quantity, and hazards associated with the chemicals.

Records will be stored in either electronic or hardcopy format. Documentation and records, regardless of medium or format, are controlled in accordance with internal work requirements and processes to ensure the accuracy and retrievability of stored records. Records generated during closure will be maintained in the operating record in accordance with Permit Condition II.I.

### **H.1.5 Facility Contact Information**

271-T Cage Operator and Property Owner:

Brian T. Vance, Manager  
U.S. Department of Energy, Richland Operations Office  
P.O. Box 550  
Richland, WA 99352  
(509) 376-7395

271-T Cage Co-Operator:

Scott Sax, President and Project Manager  
Central Plateau Cleanup Company, LLC  
P.O. Box 1464  
Richland, WA 99352  
(509) 372-3845

### **H.2 Closure Performance Standards**

The 271-T Cage will be closed in a manner that complies with the closure performance standards in WAC 173-303-610(2)(a) and (b) and, therefore, achieves clean closure. The objectives of closure activities for the 271-T Cage are as follows:

- Minimize the need for further maintenance.
- Control, minimize, or eliminate to the extent necessary to protect HHE post-closure escape of dangerous waste, dangerous constituents, leachate, contaminated runoff, or dangerous waste decomposition products to the ground, surface water, groundwater, or atmosphere.
- Remove all waste and waste residues.
- Decontaminate the concrete surface and perform concrete chip sampling to ensure concrete meets standard Model Toxics Control Act (MTCA) Method A or B cleanup levels, or remove any concrete that cannot be so decontaminated.
- Perform soil sampling and analysis to ensure soils at the 271-T Cage meet standard MTCA Method A or B cleanup levels, and remove any soils contaminated above these levels.
- Return the land to the appearance and use of surrounding land areas to the degree possible, given the nature of the previous dangerous waste activity.

### **H.3 Closure Activities**

The 271-T Cage will be clean closed.

The following closure activities are required to achieve and certify clean closure:

- Remove all dangerous and mixed waste inventory (completed; Section H.3.1).
- Remove all materials and equipment from within the DWMU (completed; Section H.3.1).
- Review dangerous and mixed waste container storage, operating, and inspection records for documented spills or releases of dangerous or mixed waste during periods of waste storage and subsequent cleanup (completed; see Section H.3.2).



- Perform a visual inspection of the concrete surface to identify dangerous or mixed waste related staining, low points, cracks, holes, pits, or breaches significant enough to allow contamination to reach underlying soil. Evaluate surfaces to identify potential for focused sample locations (completed; Section H.3.2).
- Decontaminate the concrete surface using a site-specific decontamination method (Section H.3.4).
- Perform chip sampling of the concrete surface (Section H.4.4).
- Perform soil sampling beneath the 271-T Cage raised platform (Section H.4.4).
- Confirm analytical results from chip and soil samples meet closure performance standards (Section H.5.1).
- Identify and manage contaminated environmental media (Section H.3.5).
- Identify and manage waste generated during closure (Section H.3.6).
- Transmit closure certification to Ecology (Section H.5.3).

### **H.3.1 Removal of Wastes and Waste Residues**

No dangerous or mixed waste is currently stored at the 271-T Cage. The 271-T Cage will not be used for storage of dangerous or mixed waste in the future.

It is unknown if dangerous or mixed waste residues are present at this DWMU. If dangerous or mixed waste residues are found during clean closure activities, then the residues will be removed and managed as newly generated waste in accordance with Section H.3.6.

### **H.3.2 Operating Records Review and Visual Inspection**

To support the development of this closure plan and the Sampling and Analysis Plan (SAP), a review of the T Plant Complex container storage, operating, and inspection records was completed and submitted to the operating record. The records review included the following operating record documents: facility operating logbooks (including spill reports) and waste management inspection and surveillance records. The operating records that were reviewed focused on the period during active waste storage for the T Plant Complex (i.e., January 1985 through June 2013) including:

- 271-T Cage.
- 211-T Pad.
- 221-T Sand Filter Pad.
- 277-T Outdoor Storage Area.
- 277-T Building.
- 221-T Railroad Cut.
- 2706-TB Tank System.
- 221-T Pipe Gallery Storage.
- 221-T R5 Waste Storage Area.
- 221-T Tank System.

The records review extended past the active waste storage period to June 2013. The records review indicated no releases of dangerous or mixed waste in the 271-T Cage. Table H-3 provides a summary of the records review.

Waste management records reviewed in Table H-3 indicate that dangerous or mixed waste may have been previously managed in the 271-T Cage in CAA or SAA storage areas. This waste was not managed as permitted dangerous waste; therefore, this area lacks sufficient documentation to clearly define the dangerous waste codes associated with the waste in storage in the CAAs or SAAs. Therefore, as a conservative measure, the target analytes for the 271-T Cage (shown in Table H-4) were derived from the collective list of all dangerous waste codes identified during the records review of the T Plant Complex DWMUs.

**Table H-3 Operating Records Review Summary**

Document Title	Document Type	Time Frame of Records Reviewed		Items of Concern Noted
		Start Date	End Date	
T Plant Daily Operating Logbook	Logbook	01/02/1985	06/22/2010	No
T Plant Operation Logbook	Logbook	07/27/2010	04/07/2011	No
Waste Management Area Daily Inspection Data Sheet	Data Sheet	08/29/2005	12/01/2005	No
Waste Management Area Daily Inspection Data Sheet	Data Sheet	10/01/2007	04/22/2013	No
Weekly Surveillance Log, ≤90-day Storage Areas and Satellite Accumulation Areas	Log Sheet	06/07/1991	12/20/1999	No
Treatment Facility Waste Management Area Weekly Inspection Log Sheet Treatment Facility Waste Management Area Daily Inspection Log Sheet Treatment Facility Waste Management Area Weekly Inspection Data Sheet Treatment Facility Waste Management Area Daily Inspection Data Sheet Weekly Waste Area Surveillance T Plant Daily Waste Management Area Inspection Data Sheet	Inspection, Data, and Log Sheets	01/2000 01/2005	12/2002 12/2007	No
Waste Management Area Daily Inspection Report Weekly Waste Area Surveillance	Inspection Sheets	01/2003	12/2004	Yes*
T Plant Weekly Waste Management Area Inspection Data Sheet	Data Sheet	10/18/2007	06/12/2013	No

\*Item of concern was a container of Insulkote® leaking in 271-T Cage. Product was determined to be nonregulated material. Insulkote® is a registered trademark of Industrial Insulation Group, LLC, Brunswick, Georgia.

For the purposes of focused sampling, visual inspections were performed by the Permittees on August 15, 2013, and June 1, 2015, to identify any dangerous or mixed waste related staining, major cracks, crevices, pits, low areas, or joints/seams in the 271-T Cage that would allow liquid to migrate to the underlying soil. No dangerous or mixed waste related staining, major cracks, crevices, pits or joints/seams were identified during the visual inspection.

Ecology and the Permittees performed an additional walk down and inspection of the DWMU in November of 2018. Ecology identified six focused soil samples based on professional judgment. The soil samples will be collected from below the raised 271-T Cage platform (Figure H-2). Sample locations are identified in Figure H-4. Section H.4.4.1 provides details on the sample design for the focused samples.

Supporting documentation for the Permittees' visual inspections is included in Attachment A, *T Plant 271-T Cage Visual Inspection Supporting Documentation*.

### **H.3.3 Unit Components, Parts, and Ancillary Equipment**

The 271-T Cage does not have any components, parts, or ancillary equipment identified for removal as part of closure. The 271-T Cage will remain in place pending confirmation and acceptance of clean closure.

### **H.3.4 Decontamination**

Decontamination of the concrete surface of the 271-T Cage will be performed using the site-specific decontamination method of high-pressure steam or water sprays.

Decontamination includes the following steps:

1. Ensure all stored material and equipment are relocated or removed from the area.
2. Seal all significant cracks using an appropriate sealant material.
3. Decontaminate the concrete surface using the site-specific decontamination method as described below.

Site-specific decontamination method parameters have been evaluated, including water pressure, temperature, water spray distance and angle, in relation to the concrete surface. The water pressure applied to the concrete surface should not exceed a maximum of 2,500 psi. For worker safety protection, water temperature should not exceed 120°F. If the aid of a surfactant or detergent is necessary to achieve surface decontamination, then the product will be identified based on the nature of the staining and utilized in accordance with the manufacturer's instruction. The product, concentration used, and residence time of application will be documented in the clean closure certification.

The amount of water used will be minimized to prevent ponding and runoff. Water collection measures will be employed using portable berms to enclose the area subject to decontamination. A portable vacuum system will be used to control water accumulation throughout the duration of decontamination activities, and to collect rinsate from the surface area. Residual material, including rinsate from decontamination activities, will be managed as newly generated waste in accordance with Section H.3.6.

Equipment that becomes contaminated during decontamination and sampling activities will be decontaminated for re-use or managed and disposed of as newly generated waste in accordance with Section H.3.6. Decontamination of equipment will generally be performed using dry methods (such as wiping) to the extent possible. A temporary decontamination area may be established near the 271-T Cage. This area will be constructed of Visqueen™ or an equivalent material, and may be used for decontamination of sampling equipment, personal protective equipment, and other miscellaneous small equipment used during decontamination and sampling activities. When decontamination of equipment is completed, the Visqueen™ or equivalent materials, rinsate, and solid waste debris generated by equipment decontamination (e.g., rags and personal protective equipment) will be removed and managed as newly generated waste in accordance with Section H.3.6.

### **H.3.5 Identifying and Managing Contaminated Environmental Media**

The records review and visual inspection outlined in Section H.3.2 did not identify any releases of dangerous or mixed waste or the presence of staining that could be related to dangerous or mixed waste. Contaminated environmental media (soil) removal is not anticipated. However, contaminated soil will be remediated at the focused soil sample location(s) where analytical results indicate contamination.

If contamination above closure performance standards is identified, the Permittees will meet with Ecology to discuss efforts to remediate the contaminated soil below the raised 271-T Cage.

Contaminated soil will be removed and managed as a newly generated waste stream. Contaminated soil will be managed in accordance with all applicable requirements of WAC 173-303-170, *Requirements for generators of dangerous waste*, through 173-303-230, *Special conditions*. [WAC 173-303-610(5)]

The contaminated soil will be containerized, labeled, and sampled as needed to designate for disposal of the entire volume of contaminated soil. Contaminated soil will be placed in U.S. Department of Transportation-compliant containers and sent to an appropriate land disposal unit, possibly with central accumulation as an intermediary step in accordance with all applicable requirements of WAC 173-303-200, *Conditions for exemption for a large quantity generator that accumulates dangerous waste*. Contaminated soil subject to the requirements of WAC 173-303-140, *Land disposal restrictions*, (which includes by reference 40 Code of Federal Regulations [CFR] 268 *Land Disposal Restrictions*) will be characterized, designated, and treated, as applicable, prior to disposal in an appropriate land disposal unit.

### **H.3.6 Identifying and Managing Waste Generated During Closure**

Contaminated concrete removal is not anticipated (see Section H.3.2). However, if contamination above closure performance standards is identified, the following options may be used:

- Re-decontaminate using high pressure steam or water sprays, followed by confirmatory concrete chip sampling to demonstrate re-decontamination was successful.
- Investigate the nature and extent of contamination. Remediate the concrete within the identified area of contamination by removing the affected concrete, followed by resampling to confirm contamination has been removed.
- Submit a permit modification request to treat concrete using one of the physical extraction methods, in accordance with 40 CFR 268.45 Alternative Treatment Standard for Hazardous Debris in Table 1.

Closure activities for the 271-T Cage will result in waste generated during closure activities, requiring management and disposal. Excess concrete will be generated during chip sampling. Rinsate will be generated during concrete decontamination. Rinsate generated during concrete decontamination, and excess concrete generated during chip sampling will be collected, containerized, labeled, and sampled to properly characterize such waste prior to disposal. The waste will be managed as a newly generated waste stream and either disposed of or decontaminated in accordance with WAC 173-303-610(5).

Newly generated waste will be managed in accordance with all applicable requirements of WAC 173-303-170 through WAC 173-303-230. Once waste characterization results are received, all waste will be designated. Dangerous and mixed waste will be treated, if necessary, to meet land disposal restrictions in WAC 173-303-140 (which incorporates by reference 40 CFR 268) then ultimately disposed in an appropriate land disposal unit.

Management and disposal of waste generated during closure will be documented and included as part of the clean closure certification documentation (Section H.5.3).

### **H.3.7 Closure Performance Standards for Soil**

The presumed exposure pathways that are considered for the 271-T Cage are:

- WAC 173-340-740(3), Model Toxics Control Act—Cleanup, *Unrestricted land use soil cleanup standards*, Method B (cancer and noncancer), which considers human health based on direct soil contact.

- WAC 173-340-740(2), Table 740-1, “Method A Soil Cleanup Levels for Unrestricted Land Uses” (WAC 173-340-900, *Tables*), which includes closure performance standards for human health based on unrestricted land use. MTCA Method A is only used if MTCA Method B is not available for a particular contaminant in the Cleanup Levels and Risk Calculation tables.
- WAC 173-340-747, *Deriving soil concentrations for groundwater protection*, which notes soil concentrations protective of groundwater.
- WAC 173-340-7493, *Site-Specific terrestrial ecological evaluation procedures*, which considers ecological indicators (plants, biota, wildlife) in Table 749-3, “Ecological Indicator Soil Concentrations (mg/kg) for Protection of Terrestrial Plants and Animals” (WAC 173-340-900).
- WAC 173-340-750, *Cleanup standards to protect air quality*, which describes human health risks due to fugitive vapors and dust.

Of the exposure pathways listed above, direct soil contact is always considered a complete and viable exposure pathway for all soil samples. The exposure pathway for soil protective of groundwater assumes that water or precipitation on a surface has an avenue to percolate through the surface and underlying soil to groundwater. The scenario for ecological indicators requires that vegetation, biota, and wildlife be present in order for the pathway to be complete. The exposure scenario for inhalation of fugitive vapors and dust assumes a complete pathway, which would begin with a source of contaminated media and end with a receptor.

Of the viable exposure pathways, the most conservative closure performance standard is selected. Per WAC 173-340-740(5)(c), the closure performance standard value cannot be below the following:

- Hanford Site background.
- Laboratory practical quantitation limit (PQL) found in the CPCCo laboratory contracts.

If a closure performance standard is below both values, the higher of these two values is selected.

Two exposure pathways were considered complete pathways at 271-T Cage—direct soil contact and soil levels protective of groundwater. Two exposure pathways considered above were excluded when determining 271-T Cage closure performance standards. As evidenced by the site inspection and record review (Section H.3.2), there was no known source of waste-contaminated media so the inhalation exposure pathway was excluded. Because concrete surfaces are treated to prevent growth of vegetation, a lack of plants, biota, and wildlife excludes the ecological indicator exposure pathway.

Soil sampling and analysis will be conducted in accordance with the closure plan SAP located in Section H.4. Analytical results of the focused soil samples will be individually compared to closure performance standards consistent with closure requirements. [WAC 173-303-610(2)(b)(i)]

If target analytes are found above closure performance standards, then the contaminated soil will be remediated and confirmatory sampling will be conducted in accordance with Section H.4.4.3 to ensure the closure performance standards are met for the remaining soil. If failed constituents of concern do not meet closure performance standards after soil remediation, then the Permittees will meet with Ecology to determine a path forward for closure. Resulting changes to this closure plan will be submitted to Ecology as a permit modification request in accordance with Permit Condition I.C.3. The sample design for the focused soil samples is discussed in Section H.4.4.1.

### **H.3.8 Closure Performance Standards for Concrete**

The closure performance standard for concrete is treatment using a site-specific decontamination method as discussed in Section H.3.4, followed by confirmatory concrete chip sampling to ensure analytical results meet closure performance standards and that decontamination was successful.

Ecology Publication #94-111, Section 5.6, Decontamination of Concrete Containment Structures, states the following:

Facility owners/operators, generators, and transporters have two options for decontaminating concrete: meet the operating and performance standards associated with the Alternative Treatment Standards for Hazardous Debris appropriate to concrete, or propose a site-specific decontamination method.

For the concrete surface at the 271-T Cage, a site-specific decontamination method is an appropriate approach to achieve clean closure. Ecology Publication #94-111, Section 5.6.1, Decontamination Options for Concrete, acknowledges that concrete surface removal may not be necessary to achieve decontamination and may not be the best environmental solution considering the factors involved. In certain instances, site-specific closure performance standards may be the most viable approach. As stated in Ecology Publication #94-111, Section 5.3.2, Site-Specific Decontamination Methods:

An example of a site-specific decontamination method is high-pressure water washing for decontamination of concrete that is over 1.2 cm (approximately ½ inches) thick instead of removal of the top 0.6 cm (approximately ¼ inches) of the concrete surface.

On completion of decontamination activities, the concrete will be chip sampled. The viable exposure pathways considered for concrete are the same as for soil (Section H.3.7). Concrete chip sampling and analysis will be conducted in accordance with the closure plan SAP located in Section H.4. Analytical results of the concrete chip samples will be individually compared to the soil closure performance standards consistent with closure requirements. [WAC 173-303-610(2)(b)(i)]

If target analytes are found above closure performance standards, the contaminated concrete will be remediated and confirmatory sampling will be conducted in accordance with Section H.4.4.3. If failed constituents of concern do not meet closure performance standards after remediation, then the Permittees will meet with Ecology to determine a path forward for closure. Resulting changes to this closure plan will be submitted to Ecology as a permit modification request in accordance with Permit Condition I.C.3. The sample design for concrete chip samples is discussed in Section H.4.4.1.

### **H.3.9 Development of Closure Performance Standards**

The target analytes considered for evaluation during closure sampling and analysis were derived from a list of all waste codes identified at other T Plant closure DWMUs. Table H-4 provides the closure performance standards for soil and concrete for each individual target analyte associated with the dangerous waste codes identified. A list of closure performance standard values for all exposure pathways was provided to Ecology in July 2017 as correspondence from DOE (17-AMRP-0217, “Dangerous Waste Management Unit [DWMU] 277-T Building Closure Plan Comment Disposition, and Performance Standards for Future Solid Waste Operations Complex [SWOC] Closure Plans”), which Ecology acknowledged (17-NWP-100, “Dangerous Waste Management Unit [DWMU] 277-T Building Closure Plan Comment Disposition and Performance Standards for Future Solid Waste Operations Complex [SWOC] Closure Plans”). Values in Table H-4 have been adjusted to remove nonviable pathways as noted above.

**Table H-4 Closure Performance Standards for Soil and Concrete and Analytical Performance Requirements**

CAS Number	Waste Code(s) <sup>a</sup>	Analyte	Closure Performance Standards		PQL <sup>b</sup> (mg/kg)
			Value (mg/kg)	Basis	
SW-846 Method 6010			Accuracy Requirement ±20% Recovery <sup>c</sup> Precision Requirement ≤35 RPD <sup>d</sup>		
7440-38-2	D004	Arsenic <sup>e</sup>	2.00E+01	Background	1.00E+00
7440-39-3	D005	Barium	1.65E+03	Groundwater Protection	5.00E+00
7440-43-9	D006	Cadmium	6.90E-01	Groundwater Protection	5.00E-01
7439-92-1	D008	Lead	2.50E+02	Unrestricted Land Use (MTCA Method A)	5.00E+00
7782-49-2	D010	Selenium	1.00E+01	PQL	1.00E+01
7440-22-4	D011	Silver	1.36E+01	Groundwater Protection	1.00E+00
1314-62-1 (7440-62-2)	(P120)	Vanadium pentoxide (analyzed as vanadium)	4.00E+02	Human Health – Direct Contact (noncancer)	5.00E+00
SW-846 Method 6020			Accuracy Requirement ±20% Recovery <sup>c</sup> Precision Requirement ≤35 RPD <sup>d</sup>		
7440-38-2	D004	Arsenic <sup>e</sup>	2.00E+01	Background	1.00E+00
SW-846 Method 7196			Accuracy Requirement ±20% Recovery <sup>c</sup> Precision Requirement ≤35 RPD <sup>d</sup>		
18540-29-9	D007	Chromium (Hexavalent)	5.00E-01	PQL	5.00E-01
SW-846 Method 7471			Accuracy Requirement ±20% Recovery <sup>c</sup> Precision Requirement ≤35 RPD <sup>d</sup>		
7439-97-6	D009	Mercury <sup>f</sup>	2.09E+00	Groundwater Protection	2.00E-01
SW-846 Method 8015			Accuracy Requirement ±30% Recovery <sup>c</sup> Precision Requirement ≤30 RPD <sup>d</sup>		
67-56-1	F003	Methanol	6.43E+01	Groundwater Protection	5.00E+01
SW-846 Method 8260			Accuracy Requirement ±30% Recovery <sup>c</sup> Precision Requirement ≤20 RPD <sup>d</sup>		
67-64-1	F003	Acetone	2.89E+01	Groundwater Protection	2.00E-02
71-43-2	D018, F005	Benzene	2.82E-02	Groundwater Protection	5.00E-03
71-36-3	U031, F003	<i>n</i> -Butyl alcohol (1-Butanol)	3.31E+00	Groundwater Protection	2.50E-01
75-15-0	F005, (P022)	Carbon disulfide	5.65E+00	Groundwater Protection	5.00E-03
56-23-5	D019, F001, F002	Carbon tetrachloride	4.60E-02	Groundwater Protection	5.00E-03
108-90-7	F002	Chlorobenzene	8.74E-01	Groundwater Protection	5.00E-03
67-66-3	D022	Chloroform	7.50E-02	Groundwater Protection	5.00E-03
108-94-1	F003, (U057)	Cyclohexanone	1.74E+02	Groundwater Protection	1.00E-01

**Table H-4 Closure Performance Standards for Soil and Concrete and Analytical Performance Requirements**

CAS Number	Waste Code(s) <sup>a</sup>	Analyte	Closure Performance Standards		PQL <sup>b</sup> (mg/kg)
			Value (mg/kg)	Basis	
123-91-1	(U108)	1,4-Dioxane	1.00E+01	Human Health – Direct Contact (cancer)	5.00E-01
141-78-6	F003	Ethyl acetate	2.97E+01	Groundwater Protection	5.00E+00
100-41-4	F003	Ethylbenzene	3.44E-01	Groundwater Protection	5.00E-03
60-29-7	(U117), F003	Diethyl ether [ethyl ether, ethoxyethane, or 1,1'-oxybis-ethane]	6.85E+00	Groundwater Protection	1.00E-02
78-83-1	F005	Isobutanol	9.70E+00	Groundwater Protection	5.00E-01
78-93-3	D035, F005	Methyl ethyl ketone (MEK) (2-Butanone)	1.96E+01	Groundwater Protection	2.00E-02
108-10-1	F003, (U161)	Methyl isobutyl ketone (4-Methyl-2-Pentanone)	2.73E+00	Groundwater Protection	2.00E-02
75-09-2	F001, F002	Methylene chloride	2.18E-02	Groundwater Protection	5.00E-03
127-18-4	D039, F001, F002	Tetrachloroethylene	5.30E-02	Groundwater Protection	5.00E-03
109-99-9	(U213)	Tetrahydrofuran	3.00E+01	Groundwater Protection	5.00E-02
108-88-3	F005	Toluene	4.65E+00	Groundwater Protection	5.00E-03
71-55-6	F001, F002, (U226)	1,1,1-Trichloroethane	1.58E+00	Groundwater Protection	5.00E-03
79-00-5	F002	1,1,2-Trichloroethane	2.78E-02	Groundwater Protection	5.00E-03
79-01-6	D040, F001, F002	Trichloroethylene	2.64E-02	Groundwater Protection	5.00E-03
76-13-1	F001, F002	1,1,2-Trichloro-1,2,2-trifluoro ethane	1.09E+04	Groundwater Protection	1.00E-02
75-69-4	F002	Trichlorofluoromethane	2.84E+01	Groundwater Protection	1.00E-02
75-01-4	D043	Vinyl chloride	1.00E-02	PQL	1.00E-02
1330-20-7	F003	Xylenes (total)	1.46E+01	Groundwater Protection	1.00E-02
<b>SW-846 Method 8270</b>			<b>Accuracy Requirement ±30% Recovery<sup>c</sup> Precision Requirement ≤30 RPD<sup>d</sup></b>		
95-48-7	F004	<i>o</i> -Cresol reported as total cresols <sup>g</sup>	2.33E+00	Groundwater Protection	3.33E-01
121-14-2	D030	2,4-Dinitrotoluene	3.33E-01	PQL	3.33E-01
95-50-1	F002	1,2-Dichlorobenzene (Ortho-dichlorobenzene)	7.03E+00	Groundwater Protection	3.33E-01
111-44-4	(U025)	bis (2-chloroethyl) ether (dichloroethyl ether)	3.33E-01	PQL	3.33E-01
67-72-1	D034	Hexachloroethane	3.33E-01	PQL	3.33E-01



**Table H-4 Closure Performance Standards for Soil and Concrete and Analytical Performance Requirements**

CAS Number	Waste Code(s) <sup>a</sup>	Analyte	Closure Performance Standards		PQL <sup>b</sup> (mg/kg)
			Value (mg/kg)	Basis	
98-95-3	F004	Nitrobenzene	3.33E-01	PQL	3.33E-01
87-86-5	D037	Pentachlorophenol	6.60E-01	PQL	6.60E-01
110-86-1	F005	Pyridine	6.60E-01	PQL	6.60E-01
<b>SW-846 Method 9012</b>			<b>Accuracy Requirement ±20% Recovery<sup>c</sup> Precision Requirement ≤35 RPD<sup>d</sup></b>		
57-12-5	(P030)	Cyanides, Total <sup>h</sup> (soluble cyanide salts)	1.94E+00	Groundwater Protection	1.00E+00
<b>SW-846 Method 9056</b>			<b>Accuracy Requirement ±20% Recovery<sup>c</sup> Precision Requirement ≤35 RPD<sup>d</sup></b>		
64-18-6	(U123)	Formic acid (measured as Formate)	7.20E+04	Human Health – Direct Contact (noncancer)	1.00E+01
<b>Not Analyzed</b>			<b>Not Analyzed</b>		
CAS Number	Waste Code(s)	Analyte	CAS Number	Waste Code(s)	Analyte
75-07-0	(U001)	Acetaldehyde <sup>i</sup>	1338-23-4	(U160)	MEK peroxide <sup>j</sup> (2-Butanone peroxide)
75-36-5	(U006)	Acetyl chloride <sup>i</sup>	79-46-9	F005	2-Nitropropane <sup>i</sup>
107-20-0	(P023)	Chloroacetaldehyde <sup>k</sup>	1314-80-3	(U189)	Phosphorus pentasulfide <sup>j</sup>
110-80-5	F005, (U359)	2-Ethoxyethanol <sup>l</sup>	N/A	F001, F002	Chlorinated fluorocarbons <sup>m</sup>

References:

17-AMRP-0217, “Dangerous Waste Management Unit (DWMU) 277-T Building Closure Plan Comment Disposition, and Performance Standards for Future Solid Waste Operations Complex (SWOC) Closure Plans.”

17-NWP-100, “Dangerous Waste Management Unit (DWMU) 277-T Building Closure Plan Comment Disposition and Performance Standards for Future Solid Waste Operations Complex (SWOC) Closure Plans.”

DOE/RL-92-24, *Hanford Site Background: Part 1, Soil Background for Nonradioactive Analytes*.

ECF-HANFORD-11-0038, *Soil Background for Interim Use at the Hanford Site*.

Ecology, 2005, Pub. #94-111, *Guidance for Clean Closure of Dangerous Waste Units and Facilities*. Section 5.6.2 states “...Ecology believes that MTCA unrestricted site use cleanup levels for soil represent very conservative assessments of the potential exposure risks posed by concrete.”

Ecology, 2013, “Issues associated with Establishing Soil Cleanup Levels for arsenic.”

Ecology, 2019, *Cleanup Levels and Risk Calculation (CLARC) Data Tables, Toxics Cleanup Program*.

Howard et al., 1991, *Handbook of Environmental Degradation Rates*.

SW-846, *Test Methods for Evaluating Solid Waste: Physical/Chemical Methods*, Third Edition; Final Update V.

WAC 173-340, *Model Toxics Control Act—Cleanup*.

173-340-740, *Unrestricted land use soil cleanup standards*.

173-340-747, *Deriving soil concentrations for groundwater protection*.

Notes: Screening levels considered when developing closure performance standards were drawn from the following:

- MTCA (WAC 173-340-740, Model Toxics Control Act—Cleanup, *Unrestricted land use soil cleanup standards*) (Ecology, 2019, *Cleanup Levels and Risk Calculation (CLARC) Tables*, May 2019 data tables are most recent). MTCA Method B values represent both cancer and noncancer human health risk values from direct soil contact.

**Table H-4 Closure Performance Standards for Soil and Concrete and Analytical Performance Requirements**

CAS Number	Waste Code(s) <sup>a</sup>	Analyte	Closure Performance Standards		PQL <sup>b</sup> (mg/kg)
			Value (mg/kg)	Basis	

The most conservative value of the two Method B published values will be used. Method A values are substituted when MTCA Method B values are not provided in the CLARC tables.

- WAC 173-340-747. Section 4 describes the fixed parameter three-phase partitioning model. Where applicable, these values were used. Values selected were from the 25°C vadose zone. If values were not listed for 25°C, values from the 13°C vadose zone were used.
- Background levels as published in ECF-HANFORD-11-0038, *Soil Background for Interim Use at the Hanford Site*, and DOE/RL-92-24, *Hanford Site Background: Soil Background for Nonradioactive Analytes*. Background values were used at the 90<sup>th</sup> percentile of calculated Hanford Site background values.
- Closure performance standard values for all exposure pathways were provided to Ecology in July 2017 correspondence from DOE (17-AMRP-0217) and which values Ecology acknowledged (17-NWP-100). Values in this table have been adjusted to remove nonviable pathways.
- Values taken from the above resources that fell below background levels were not considered.

<sup>a</sup>Many of the chemicals listed in this table also have P and U waste codes associated with them (WAC 173-303-9903, *Discarded chemical products list*). (1) These codes are listed in the table because it is unknown whether or not the waste container had a “discarded chemical product” (per WAC 173-303-081) or if it was a chemical contaminant of the waste. (2) The P and U code designations do play a part in the determination of dangerous waste criteria (WAC 173-303-100), as they indicate that chemical as either acutely hazardous (P) or dangerous (U) waste based on toxicity and/or persistence calculations. For these reasons, the P and U codes are listed in parentheses.

<sup>b</sup>Highest allowable PQL will be defined in the individual laboratory contract with CPCCo. In practice, the laboratory PQL values have the potential to be lower.

<sup>c</sup>Accuracy criteria for associated batch matrix spike percent recoveries. Evaluation based on statistical control of laboratory control samples is also performed. Precision criteria for batch laboratory replicate matrix spike analyses or replicate sample analysis.

<sup>d</sup>Precision is determined by the laboratory based on historical data or statistically derived control limits. Limits are reported with the data. Where specific acceptance criteria are listed, those acceptance criteria may be used in place of statistically derived acceptance criteria.

<sup>e</sup>Arsenic – the Hanford Site closure performance standard is 20 mg/kg based on a letter (Ecology, 2013, “Issues Associated with Establishing Soil Cleanup Levels for Arsenic”), indicating that the Method A soil closure performance standard of 20 mg/kg can be used to define natural background levels when developing Method B soil closure performance standards for the Hanford Site. One of the two methods (SW-846 6010 or 6020) may be used.

<sup>f</sup>Mercury – Equation 740-1 and Equation 740-2 from WAC 173-340-740(3)(b) are used to calculate the MTCA Direct Contact Human Health soil closure performance standards. The MTCA human health direct contact soil closure performance standard for mercury is calculated to be 24 mg/kg.

<sup>g</sup>Cresols – the closure performance standard for *o*-cresol will be reported as total cresols: a total of the three isomeric forms: *o*-cresol, *m*-cresol, and *p*-cresol.

<sup>h</sup>Cyanides – Copper (P029), potassium (P098), and sodium cyanides (P106), as well as other cyanide salts not specified will be analyzed as total cyanide.

<sup>i</sup>Acetaldehyde and 2-nitropropane are listed with inhalation hazards in the CLARC Tables. However, because the inhalation pathway is not being addressed as part of this closure plan, they will not be analyzed.

<sup>j</sup>Acetyl chloride, MEK peroxide, and phosphorus pentasulfide are not listed in the CLARC Tables. They would most likely be inhalation hazards if present (based on NIOSH chemical hazard data), so they are not being calculated as closure performance standards and will not be analyzed.

<sup>k</sup>Chloroacetaldehyde – No previous records of analysis on the Hanford Site. CAS is not listed in CLARC tables.

<sup>l</sup>2-Ethoxyethanol – Due to the extremely short half-life of 2-ethoxyethanol (between 168 and 672 hours), its presence in soil samples is highly unlikely; therefore, samples will not be analyzed for this constituent. Degradation rates from Howard et al., 1991, *Handbook of Environmental Degradation Rates*, p. 420.

<sup>m</sup>A CFC is an organic compound that contains only carbon, chlorine, and fluorine, produced as a volatile derivative of methane, ethane, and propane. Examples of CFCs include 1,1,2-trichloro-1,2,2-trifluoroethane (CFC-133) and trifluoromethane (CFC-11).

**Table H-4 Closure Performance Standards for Soil and Concrete and Analytical Performance Requirements**

CAS Number	Waste Code(s) <sup>a</sup>	Analyte	Closure Performance Standards		PQL <sup>b</sup> (mg/kg)
			Value (mg/kg)	Basis	

CAS = Chemical abstracts service

MTCA = Model Toxics Control Act–Cleanup

CFC = Chlorofluorocarbon

N/A = Not applicable

CLARC = Cleanup levels and risk calculation

PQL = Practical quantitation limit

CPCCo = Central Plateau Cleanup Company, LLC

RPD = Relative percent difference

MEK = Methyl ethyl ketone

### H.3.10 Conditions That Will be Achieved When Closure is Complete

Upon completion of the closure activities, the 271-T Cage will remain in an “as-is” state with the concrete flooring and metal chain-link fencing material remaining in place. The 271-T Cage will continue to be used for equipment and material storage in support of T Plant Complex operations. Once Ecology accepts the clean closure certification, a permit modification request will be submitted to remove the 271-T Cage DWMU closure requirements from the Permit.

## H.4 Sampling and Analysis Plan

Sampling and analysis of the 271-T Cage concrete and underlying soil will be conducted to confirm whether closure performance standards have been met. Sampling includes six focused soil samples, and five concrete non-statistical chip samples (Figure H-5). Sampling and analysis will be performed in accordance with the sampling and quality standards established in this closure SAP.

### H.4.1 Sampling and Analysis Plan Requirements

Sampling and analysis activities were designed using the EPA guidance document EPA/240/R-02/005, *Guidance on Choosing a Sampling Design for Environmental Data Collection for Use in Developing a Quality Assurance Project Plan* (EPA QA/G-5S) and Ecology Publication #94-111, and will be conducted via this SAP. The objective of the soil and concrete sampling described in this section is to determine if the closure performance standards (Table H-4) established in this closure plan pursuant to WAC 173-303-610(2)(b)(i) and WAC 173-303-610(2)(b)(ii) have been satisfied, demonstrating clean closure for the 271-T Cage.

The closure SAP details sampling and analysis procedures in accordance with SW-846, *Test Methods for Evaluating Solid Waste: Physical/Chemical Methods*, Third Edition; Final Update V; the American Society for Testing and Materials (ASTM) *Annual Book of ASTM Standards* (ASTM International, 2017); and applicable EPA guidance. Sampling and analysis activities will meet applicable requirements of SW-846, ASTM standards, and EPA-approved methods at the time of closure. This SAP was also developed using guidance from Ecology Publication #94-111, Section 7.0, Sampling and Analysis for Clean Closure, and EPA/240/R-02/005.

### H.4.2 Sampling and Analysis Schedule

Closure sampling and analysis will be performed in accordance with the closure plan schedule located in Section H.6.

### H.4.3 Project Management

The following subsections address project management and ensure that the project has defined goals, participants understand the goals and approaches used, and planned outputs are appropriately documented. Project management roles and responsibilities discussed in this section apply to the major activities covered under this SAP.

#### H.4.3.1 Project/Task Organization

The Permittees are responsible for planning, coordinating, sampling, preparing, packaging, and shipping samples to the contract analytical laboratory. The project has the following key positions.

**Regulatory Representative.** Ecology will assign an Ecology employee as Project Manager responsible for oversight of the 271-T Cage closure.

**Project Manager and Technical Lead.** The CPCCo Project Manager provides oversight of closure activities and coordinates with the U.S. Department of Energy, Richland Operations Office (DOE-RL), Ecology, and contract management. In addition, support is provided to the project technical lead to ensure that work is performed safely and cost effectively.

The Project Manager (or designee) for the 271-T Cage closure sampling is responsible for direct management of sampling documents and requirements, field activities, and subcontracted tasks. The Project Manager is responsible for ensuring that project personnel are working to the approved version of the 271-T Cage Closure Plan in the Permit and for providing updates to field personnel.

The Project Manager works closely with QA, Health and Safety, and the Field Work Supervisor (FWS) to integrate these and other lead disciplines in planning and implementing the work scope. The Project Manager also coordinates with DOE-RL and the primary contractor management on all sampling activities. The Project Manager supports DOE-RL in coordinating sampling activities with the Regulatory Representative.

**Environmental Compliance Officer.** The Environmental Compliance Officer provides technical oversight, direction, and acceptance of project and subcontracted environmental work, and develops appropriate mitigation measures with a goal of minimizing adverse environmental impacts.

**Health and Safety.** The Health and Safety organization is responsible for coordinating industrial safety and health support within the project, as carried out through health and safety plans, job hazard analyses, and other pertinent safety documents required by federal regulation or internal primary contractor work requirements.

**Waste Management Lead.** The Waste Management Lead communicates policies and protocols, and ensures project compliance for storage, transportation, disposal, and waste tracking.


**Field Work Supervisor.** The FWS is responsible for planning and coordinating field sampling resources. The FWS ensures that samplers are appropriately trained and available. Additional related responsibilities include ensuring that the sampling design is achievable, understood, and can be performed as specified.

The FWS must document all deviations from procedures or other problems pertaining to sample collection, Chain-of-Custody (COC) protocols, analytes, sample analysis, sample transport, or noncompliant monitoring. As appropriate, such deviations or problems will be documented in the field logbook or in nonconformance report forms in accordance with internal corrective action procedures. The FWS is responsible for communicating field corrective actions to the Project Manager and for ensuring that immediate corrective actions are applied to field activities.

**Sample Management and Reporting.** The Permittee's sampling organization coordinates field sampling as well as laboratory analytical work, ensuring that laboratories conform to the specifications of SW-846 analytical methodology at the time of closure. The sampling organization receives the analytical data from the laboratories, performs the data entry into the Hanford Environmental Information System (HEIS) database, and arranges for data validation. The sampling organization is responsible for informing the Project Manager of any issues reported by the contract analytical laboratory.

**Contract Laboratories.** The contract laboratories analyze samples in accordance with established procedures and provide necessary sample reports and explanation of results in support of data validation.

The roles described above make up the project organization structure (regarding sampling and analysis) and interact in a manner shown graphically in Figure H-4.

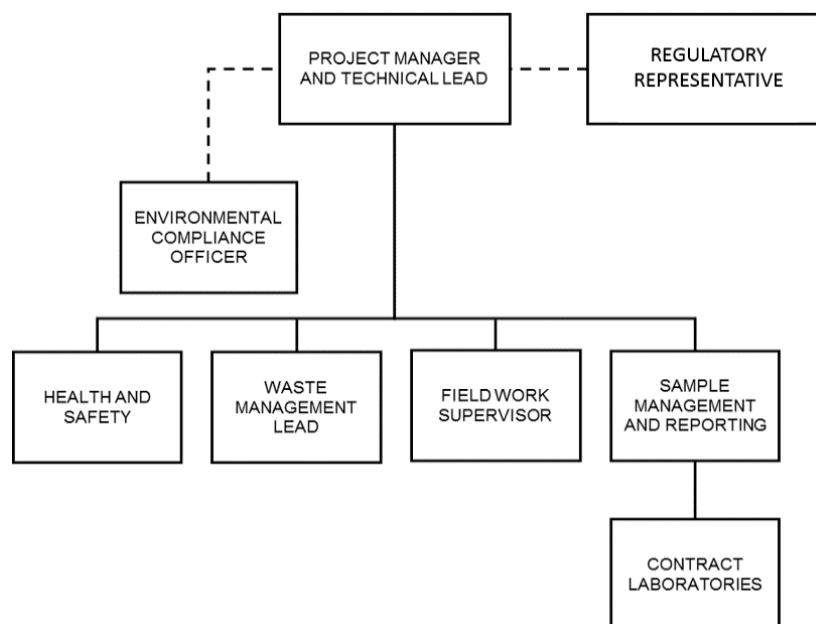

**Figure H-4 Sampling and Analysis Plan Project Organization**

#### H.4.3.2 Field Sampler Training/Certification

Training records of field samplers are maintained by the sampling organization, retained in the electronic training record database, or archived with operating records. Field samplers will be collecting grab samples of the soil below the raised 271-T Cage platform and concrete chip samples from the concrete surface for analysis to determine if closure performance standards have been met.

#### H.4.3.3 Sampling Documents and Records

The Project Manager is responsible for ensuring that the current version of the SAP is being used and providing any updates to field personnel. Version control is maintained by the administrative document control process. Changes to the SAP affecting the data needs will be submitted as a permit modification request.

Logbooks are required for field activities. A logbook must be identified with a unique project name and number. The individual(s) responsible for logbooks will be identified in the front of the logbook and only authorized persons may make entries in logbooks. After review, logbooks will be signed by the field manager, supervisor, cognizant scientist/engineer, or other responsible individual. Logbooks will be permanently bound, waterproof, and ruled with sequentially numbered pages. Pages will not be removed from logbooks for any reason. Entries will be made in indelible ink. Corrections will be made by marking through the erroneous data with a single line, entering the correct data, and initialing and dating the changes.

The Project Manager is responsible for ensuring that a project file is properly maintained. The project file will contain the records or references to their storage locations. The following items will be included in the project file, as appropriate:

- Field logbooks or operational records.
- Global positioning system data.
- Sample authorization forms.
- Data forms.
- COC forms.
- Sample receipt records.
- Inspection or assessment reports and corrective action reports.
- Interim progress reports.
- Final reports.
- Laboratory data packages.
- Data verification and validation reports.

The contract analytical laboratory is responsible for maintaining, and having available upon request, the following items:

- Analytical logbooks.
- Raw data and Quality Control (QC) sample records.
- Standard reference material or proficiency test sample data.
- Instrument calibration information.

Records will be stored in accordance with Section H.1.4.4.

#### **H.4.4 Sampling Design and Analysis**

The sampling design includes input parameters used to determine the number and location of samples. The primary purpose of sampling the concrete and soil is to determine if analytical results meet closure performance standards (Table H-5).

##### **H.4.4.1 Sampling Process Design**

This SAP is based on guidance from Ecology Publication #94-111, Section 7.0, to determine the type of sampling design that will be used to demonstrate clean closure. When designing the sampling plan, both focused and grid sampling methods were considered. The basis for sampling is described in the following paragraphs.

**Focused (Judgmental) Soil Sampling.** As identified in Ecology Publication #94-111, Section 7.2.2, Focused Sampling, this method is selective sampling of areas where contamination is expected or releases have been documented.

1 Focused sampling should be conducted in addition to grid sampling where there is evidence of leaks or  
2 spills or potential for a dangerous waste constituent to migrate. Focused sampling could involve liner  
3 sampling along a drainage-way, boundary, or other linear dimension. Likely areas for focused sampling  
4 include, but are not limited to:

- 5 • Containers, tanks, waste piles, or any other units (such as ancillary pipes) in contact with soil;
- 6 • Below any sumps or valves;
- 7 • Load or unload areas;
- 8 • Storage units with underlying pavements or concrete that appears to be cracked or broken; and
- 9 • Areas receiving runoff or discharge from DWMUs, such as a ditch, a swale, or the discharge  
10 point down gradient from a pipe.

11 Evidence for additional areas of focused sampling could include:

- 12 • Visual or olfactory evidence of contamination including evidence based on direct reading field  
13 instrumentation or field test kits;
- 14 • Knowledge, such as reports by employees, inspectors, or others that releases have or may have  
15 occurred;
- 16 • Length of time the unit has been in existence;
- 17 • Entries into the unit operating record; and
- 18 • Soil gas surveys or soil borings.


19 Per Ecology's visual inspection (Section H.3.2) and Ecology's professional judgment, focused sample  
20 locations are identified for the soil beneath the 271-T Cage platform. Six soil sample locations beneath  
21 the cage have been selected to demonstrate clean closure of the soil. Three sample locations are directly  
22 below the front edge of the 271-T Cage and an additional three are located near the middle of the  
23 271-T Cage (Figure H-5).

24 The 271-T Cage DWMU lacks a berm to prevent waste releases from the unit to the soil, therefore the six  
25 soil samples (three located near the front edge, and 3 located near the middle of the unit) are identified  
26 based on professional judgement.

27 Selection of focused sampling units (i.e., the number and location of samples) is generally based on  
28 knowledge of the feature or condition under investigation and on professional judgment. Focused  
29 sampling is distinguished from probability-based sampling in that inferences are based on professional  
30 judgment, not statistical scientific theory. Therefore, conclusions about the target population are limited  
31 and depend entirely on the validity and accuracy of professional judgment.

32 The use of statistical evaluation for focused data is not possible. Any focused data must be reviewed  
33 directly against the closure performance standards as to whether they are above or below the standards.

34 **Grid (Non-Statistical) Chip Sampling.** The proposed site-specific decontamination method of  
35 high-pressure steam or water washing is chosen for the concrete surface. As an evaluation criterion,  
36 concrete chip sampling results will be directly compared to the closure performance standards for soil  
37 (Section H.3.9).

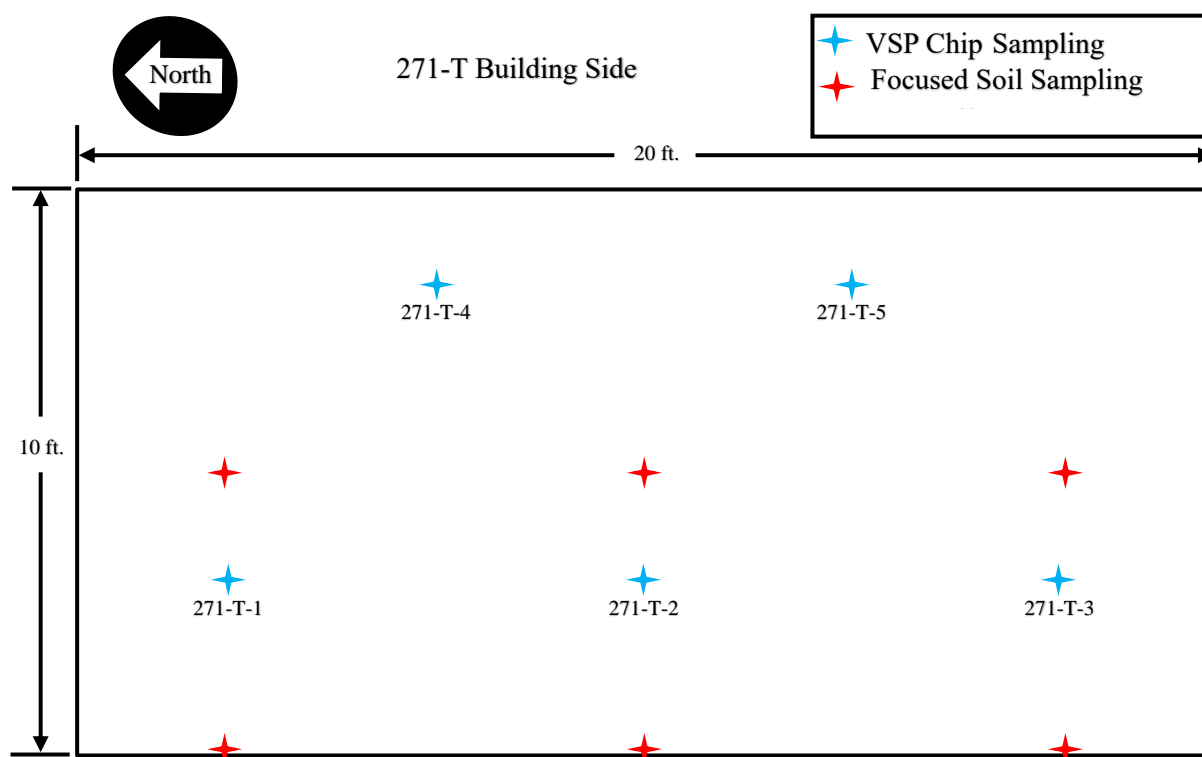

**Figure H-5 271-T Cage Sampling Locations**

Chip samples are collected at regularly-spaced intervals over an area. An initial location or time is chosen at random, and then the remaining sampling locations are defined so the locations are at regular intervals over an area (grid). The Visual Sample Plan (VSP<sup>1</sup>) software was used to create a systematic triangular grid layout with a random starting point. Sample locations were determined using a non-statistical sampling approach with a predetermined number of samples.

Professional judgment determined that five chip samples would provide sufficient coverage to demonstrate successful decontamination (Figure H-5). Samples will be taken from the node locations indicated by the VSP software and will be assigned sample location identifications and sample numbers using the HEIS database.

Supporting documentation for the VSP software sampling designations is provided in Attachment B, *T Plant 271-T Cage Visual Sample Plan Supporting Documentation*.

#### **H.4.4.2 Sampling Methods and Handling**

The grab sample matrix will consist of soil collected in clean sample containers. Soil will be collected at a depth of no more than 15 cm (6 in) below ground surface, unless staining or discoloration indicates contamination is below that depth. For the purpose of this SAP, ground surface is defined as the exposed surface layer beneath the 271-T Cage once loose gravel has been removed. Once the soil is collected, the sampled media will be screened to remove material larger than approximately 2 mm (0.08 in) in diameter,

<sup>1</sup>Visual Sample Plan is a product of Pacific Northwest National Laboratory (PNNL), Richland, Washington.



which allows for a larger surface area-to-volume ratio. This ratio increases the likelihood of identifying any potential contamination in the sample.

Chip sampling is appropriate for porous surfaces (concrete) and will be accomplished with either a hammer and chisel, or an electric hammer. Sampling devices will be disposable, or either laboratory cleaned or field-decontaminated and kept wrapped until ready for use. Individuals will don appropriate personal protective equipment when breaking and/or sampling the concrete surface. An effort will be made to avoid scattering pieces out of the sampling area boundary. Any pieces that fall outside the sampling area will not be used. The area will be chipped to less than one-quarter inch (preferably 1/8 in). Chipped pieces will be collected using a dedicated, decontaminated dustpan and natural bristle brush and transferred directly into the sampling bottle. Samples will be stored out of direct sunlight and cooled to  $\leq 6^{\circ}\text{C}$ , then delivered to the laboratory for analysis.

To ensure sample and data usability, sampling will be performed in accordance with established sampling practices, procedures, and requirements pertaining to sample collection, collection equipment, and sample handling. Sampling includes the following:

- Preparation and review of sampling paperwork such as COCs or labels.
- Sample container and equipment preparation.
- Field walk down of sample area (includes locating and marking sample locations and sample boundary areas).
- Sample collection.
- Sample packaging and shipping.

Sample preservation and holding time requirements are specified in Table H-5. These requirements are in accordance with the analytical method specified. The final container type and volumes will be identified on the sampling authorization form and COC form.

**Table H-5 Preservation, Container, and Holding Time Requirements for Soil and Concrete Samples**

EPA Method	Analysis (Analytes)	Preservation Requirement	Holding Time	Bottle Type
6010	ICP-AES (Metals)	None	180 days	G/P
6020	ICP-MS (Metals)	None	180 days	G/P
7196	Colorimetric (Hexavalent Chromium)	Cool $\leq 6^{\circ}\text{C}$	30 days prior to extraction; 7 days after extraction	G/P
7471	Cold Vapor atomic absorption (Mercury)	Cool $\leq 6^{\circ}\text{C}$	28 days	G/P
8015	GC/Flame Ionization Detector (Non-halogenated Organics [Methanol])	Cool $\leq 6^{\circ}\text{C}$	14 days	G
8260	GC/MS (Volatile Organic Compounds)	Frozen*	14 days	G
8270	GC/MS (Semivolatile Organic Compounds)	Cool $\leq 6^{\circ}\text{C}$	14 days prior to extraction; 40 days after extraction	Amber Glass

**Table H-5 Preservation, Container, and Holding Time Requirements for Soil and Concrete Samples**

EPA Method	Analysis (Analytes)	Preservation Requirement	Holding Time	Bottle Type
9012	Colorimetric (Total Cyanide)	Cool $\leq 6^{\circ}\text{C}$	14 days from sampling to extraction; 40 days from extraction to analysis	G/P
9056	Ion Chromatography (Inorganic anions [Formic acid as Formate])	Cool $\leq 6^{\circ}\text{C}$	28 days	G/P

References: SW-846, *Test Methods for Evaluating Solid Waste: Physical/Chemical Methods*, Third Edition; Final Update V.

\*Preservation techniques for soil samples collected include refrigeration immediately following collection (placing on ice) and freezing overnight prior to shipping. Holding times are from sampling to analysis unless specified otherwise.

AES = Atomic emission spectrometry

ICP = Inductively coupled plasma

EPA = U.S. Environmental Protection Agency

MS = Mass spectrometry

GC = Gas chromatography

G/P = Glass/plastic

A sampling and data-tracking database (e.g., HEIS) is used to track the samples from the point of collection through the laboratory analysis process. HEIS sample numbers are issued to the sampling organization for the project. Each sample is identified and labeled with a unique HEIS sample number.

To prevent potential contamination of the samples, clean equipment will be used for each sampling activity. Equipment used during sampling will be decontaminated or disposed of and managed as newly generated waste in accordance with Section H.3.6. Level I EPA pre-cleaned sample containers will be used for samples collected for chemical analysis. Container sizes may vary, depending on laboratory-specific volumes/requirements for meeting the PQL.

The date and time of sample collection, and the sample location, depth, and corresponding HEIS numbers will be documented in the sampler's field logbook. A custody seal (e.g., evidence tape) will be affixed to each sample container (except for Volatile Organic Analysis [VOA] sample containers) or the sample collection package in such a way as to indicate potential tampering. The custody seal will be inscribed with the sampler's initials and date. Custody tape is not applied directly to VOA sample containers based on the potential for affecting analyte results or fouling of laboratory equipment. Alternatively, VOA vials are placed in a sealable plastic bag affixed with custody seals and any other required labels/documentation.

Data verification and validation will also note any issues with sample collection and analysis. Each sample container will be labeled with the following information on firmly affixed, water-resistant labels:

- Sample authorization form and form number.
- HEIS number.
- Sample collection date and time.
- Sampler identification (e.g., initials).
- Analysis required.
- Preservation method (if applicable).
- COC identification number.

In addition to the container label information, sample records must include:

- Sample location.
- Matrix (e.g., soil).

Sample custody will be maintained in accordance with existing Hanford Facility protocols to ensure maintenance of sample integrity throughout the analytical process. COC protocols will be followed throughout sample collection, transfer, analysis, and disposal to ensure that sample integrity is maintained. A COC record is initiated in the field at the time of sampling and will accompany each set of samples shipped to any laboratory. At a minimum, the following information must be identified on a completed COC record:

- Collector(s) names.
- Project designation.
- Unique sample numbers.
- Date, time, and location (or traceable reference thereto) of sample collection.
- Chain of possession information (i.e., signatures/printed names of all individuals involved in the transfer of sample custody and storage locations, dates of receipt and relinquishment).

Additional information regarding the sample and specific analytical instructions may also be documented.

Discrepancies with the sample material (unusual color, texture, or odor), collection techniques, containers, or transfer packages are noted in the field logbook, communicated with the Project Manager, and corrective actions are initiated. For example, where a custody seal is damaged or missing, each case is individually reviewed for usability of the sample. The damaged or missing seal and action taken will be documented in the final data package. Data verification and validation will also note any issues with sample collection and analysis.

Contaminated environmental media and newly generated waste resulting from sampling activities will be handled in accordance with all applicable requirements of WAC 173-303-170 through WAC 173-303-230 as outlined in Sections H.3.5 and H.3.6.

#### **H.4.4.3 Sampling and Analysis Requirements to Address Removal of Contaminated Soil and Concrete**

If focused soil or chip sample results based on direct comparison (Section H.4.4.1) indicate contamination above closure performance standards, then sample location(s) will be remediated to remove contaminated soil or concrete. Following remediation, confirmatory sampling will be performed in accordance with this closure SAP. Analytical results of confirmatory sample(s) collected at focused and chip sample location(s) will be directly compared to the closure performance standards to confirm remediation efforts were effective and the area is clean. If after remediation the soil or concrete does not meet closure performance standards, then the Permittees will meet with Ecology to determine a path forward for closure. Resulting changes to this closure plan will be submitted to Ecology as a permit modification request in accordance with Permit Condition I.C.3.

#### **H.4.4.4 Analytical Methods**

All analyses and testing will be performed consistent with this closure plan, laboratory contracts, and laboratory analytical procedures at the time of closure. The contracted analytical laboratory must achieve the lowest PQLs consistent with the selected analytical method (identified in Table H-4) in order to confirm that the closure performance standards are met.

#### H.4.4.5 Quality Control

QC procedures must be followed in the field and laboratory to ensure that reliable data are obtained. Field QC samples will be collected to evaluate the potential for cross-contamination and provide information pertinent to field sampling variability. Field QC samples include the collection of:

- Field trip blanks.
- Field transfer blanks.
- Equipment rinsate blanks.
- Field duplicates.

Laboratory QC samples estimate the precision and bias of the analytical data. Laboratory QC samples include:

- Method blanks.
- Laboratory duplicates.
- Matrix spikes.
- Matrix spike duplicates.
- Surrogates.
- Laboratory control samples.

Field and laboratory QC samples are summarized in Table H-6.

**Table H-6 Project Quality Control Sampling Summary**

QC Sample Type	Frequency	Characteristics Evaluated
<b>Field QC</b>		
Field Trip Blanks	One per 20 samples, minimum of one per decision unit	Field trip blanks are used to assess contamination from sample containers or during transportation and storage procedures.
Field Transfer Blanks	One per day that volatile organic compounds are sampled	Field transfer blanks are used to assess contamination from surrounding sources during sample collection.
Equipment Rinsate Blanks	One per 20 samples per analytical method	Equipment rinsate blanks are used to measure the cleanliness of sampling equipment and effectiveness of equipment decontamination procedures.  Equipment rinsate blanks are not required if only disposable equipment is used, or if rinsing between samples is not practical (e.g., core drilling equipment).
Field Duplicates	One per 20 samples with a minimum of one per decision unit	Field duplicates are used to assess the precision of the entire data collection activity, including sampling, analysis, and site heterogeneity.
<b>Laboratory QC*</b>		
Method Blanks	One per batch	Method blanks measure contamination associated with laboratory sample preparation and analysis.

**Table H-6 Project Quality Control Sampling Summary**

QC Sample Type	Frequency	Characteristics Evaluated
Laboratory Duplicates	One per laboratory analytical batch	Laboratory duplicates measure laboratory reproducibility and precision.
Matrix Spikes	One per laboratory analytical batch	The matrix spike recovery measures the effects of interferences in the sample matrix and reflects the accuracy of the determination.
Matrix Spike Duplicates	One per laboratory analytical batch	The relative percent difference between matrix spikes and matrix spike duplicates measures the precision of a given analysis.
Surrogates	Added to each sample and QC (laboratory and field) sample	Surrogate standards are added prior to extraction of the sample to evaluate accuracy, method performance, and extraction efficiency.
Laboratory Control Samples	One per laboratory analytical batch	The laboratory control samples measure the accuracy of the analytical method.

\*Batching across projects is allowed for similar matrices.

#### **H.4.5 Data Review, Verification, Validation, and Usability Requirements**

Analytical results will be received from the contract analytical laboratory, loaded into a database (e.g., HEIS), and verified in accordance with Section H.4.5.1. A total of 5% of the data will be validated as described in Section H.4.5.2. A Data Quality Assessment (DQA) will be conducted to ensure the output of the DQO process provided appropriate values (Section H.4.5.3).

##### **H.4.5.1 Data Verification**

Verification activities ensure analytical data in the database were properly uploaded and reflect the contract laboratory program equivalent data packages. The steps outlined below will consider both the primary and QC samples. Activities will include, but are not limited to, the following:

- Amount of data requested matches the amount of data received (number of samples for requested methods of analytes).
- Correct procedures/methods are used.
- Issues with sample collection and analysis are noted.
- Documentation/deliverables are complete.
- Hard copy and electronic versions of the data are identical.
- Data is reasonable based on analytical methodologies.

##### **H.4.5.2 Data Validation**

The contract analytical laboratory supplies the equivalent of contract laboratory program analytical data packages intended to support data validation by the third party. These data packages are supported by QC test results and raw data. Data validation includes both primary and QC samples, and considers issues with sample collection and analysis.

Controls are in place to preserve the data sent to the validators, such as allowing only additions to be made, not changes to the raw data. The format and requirements for data validation activities are based on the most current version of EPA-540-R-08-01, *National Functional Guidelines for Superfund Organic Methods Data Review* (OSWER 9240.1-48), and EPA-540-R-10-011, *National Functional Guidelines for Inorganic Superfund Data Review* (OSWER 9240.1-51). As defined by the validation guidelines, 5% of the analytical results will undergo Level C validation.

#### **H.4.5.3 Data Quality Assessment**

A DQA will be performed on the final data using the guidance in EPA/240/B-06/002, *Data Quality Assessment: A Reviewer's Guide* (EPA QA/G-9R), and implementing the specific requirements in Sections H.4.5.1 through H.4.5.2.

#### **H.4.6 Revisions to the Sampling and Analysis Plan and Constituents to be Analyzed**

Changes to the SAP may be necessary due to unexpected events during closure. An unexpected event would be an event outside the scope of the SAP or a condition that inhibits implementation of the SAP as written. Revisions to the SAP will be submitted no later than 30 days after the unexpected event as a permit modification request. [WAC 173-303-610(3)(b)]

#### **H.5 Confirmation and Certification of Closure Activities**

Confirmation of closure will be performed using methods defined in Section H.5.1. Closure certification is performed by an Independent Qualified Registered Professional Engineer (IQRPE) (Section H.5.2). Certification will be submitted to Ecology as described in Section H.5.3, and the conditions of the DWMU after closure are described in Section H.3.10. The timing of closure is described in Section H.6.

##### **H.5.1 Confirmation of Clean Closure**

The 271-T Cage will be clean closed through confirmation of successful decontamination determined by chip sampling of the concrete surface, and sampling of soil beneath the 271-T Cage platform.

##### **H.5.1.1 Confirmation of Site-Specific Decontamination**

On completion of decontamination at the concrete surface, the area will be chip sampled to confirm whether decontamination was successful.

The following is identified in Ecology Guidance Publication # 94-111.

##### **Section 5.3.2 Site-Specific Decontamination Methods**

At a minimum, requests for approval of site-specific decontamination methods must include:

- Information demonstrating that the proposed decontamination method is in compliance with the closure performance standard at WAC 173-303-610(2), including information demonstrating that the proposed decontamination method or standard will control, minimize, or eliminate post-closure escape of dangerous waste, dangerous constituents, leachate, contaminated run-off, and dangerous waste decomposition products to the ground, surface water, ground water, and air.
- Information demonstrating that the proposed decontamination method is in compliance with federal, state, and local requirements.
- Information demonstrating that the proposed decontamination method is protective of human health and the environment.

- Proposed evaluation criteria to measure the effectiveness of the site-specific decontamination method. For example, MTCA unrestricted site use cleanup levels might be used to define when debris is considered decontaminated.

#### Section 5.6.1 Decontamination Options for Concrete

...in some cases, decontamination of concrete using high-pressure steam or water washing, with appropriate site-specific performance standards, may be a better option than removal of the top 0.6 cm of concrete surface. If high-pressure steam or water washing is used, the site-specific decontamination performance standard might involve comparing concrete chip samples with MTCA unrestricted site use cleanup levels.

This confirmatory step will be documented. Documentation will include photos, dimensions (depth and area), and locations of chip sampling. Chip sample results from the contract analytical laboratory will be reviewed to confirm that target analytes have met closure performance standards (Table H-4). Once it has been determined that analytical results from chip sampling are below the closure performance standards, the concrete of 271-T Cage DWMU will be considered clean.

#### H.5.1.2 Confirmation of Soil Sample Results

Soil sample results from the contract analytical laboratory will be reviewed to confirm that target analytes have met closure performance standards (Table H-4). Once it has been determined that soil sample results have met closure performance standards, then the soil beneath the 271-T Cage will be considered clean.

Once clean closure has been confirmed for the 271-T Cage DWMU, a closure certification will be prepared in accordance with Section H.5.3.

#### H.5.2 Role of the Independent Qualified Registered Professional Engineer

An IQRPE will be retained to provide certification of the closure as required by WAC 173-303-610(6). The IQRPE will be responsible for observing field activities and reviewing documents associated with clean closure of the 271-T Cage DWMU. At a minimum, the following field activities will be completed:

- Review 271-T Cage visual inspection documentation.
- Observe and/or review decontamination of the concrete surface.
- Verify that locations of chip and soil samples are as specified in the SAP.
- Observe and/or review concrete chip and soil sampling activities.
- Review sampling procedures and results.
- Observe and/or review contaminated environmental debris removal (as applicable).
- Observe and/or review newly generated waste management and disposition records.
- Verify that closure activities were performed in accordance with this closure plan.

The IQRPE will record observations and reviews in a written report that will be retained in the operating record. The resulting report will be used to develop the clean closure certification, which will then be submitted to Ecology.

#### H.5.3 Closure Certification

Within 60 days of completion of closure of the 271-T Cage DWMU, a certification that the DWMU has been closed in accordance with the specifications in this closure plan will be submitted to Ecology by registered mail or other means that establish proof of receipt (including applicable electronic means). The certification will be signed by the Permittees and by the IQRPE. At the time of the closure certification submittal, the Permittees will submit to Ecology information to support the closure certification.

[WAC 173-303-610(6)]

The supporting information will include at least the following:

- All field notes and photographs related to closure activities.
- A description of any minor deviations from this closure plan and justification for these deviations.
- Documentation of the removal and final disposition of any unanticipated contaminated environmental media.
- Documentation of the removal and final disposition of any newly generated waste.
- All laboratory and/or field data, including sampling procedures, sampling locations, QA/QC samples, and COC procedures for all samples and measurements, including samples and measurements taken to determine background conditions and determine or confirm clean closure.
- A summary report that identifies and describes the data reviewed by the IQRPE, and tabulation of the analytical results of samples taken to determine and confirm clean closure performance standards were met.
- Description of the 271-T Cage DWMU appearance at completion of closure, including what parts of the former unit, if any, will remain after closure.

## H.6 Closure Schedule and Time Frame

Closure activities will be completed no more than 180 days after the effective date of the approved permit modification incorporating this closure plan. [WAC 173-303-610(4)(b)]

Should an unexpected event occur and an extension to the 180-day closure activity expiration date be deemed necessary, a permit modification request will be submitted to Ecology for approval at least 30 days prior to the expiration of the 180 days. [WAC 173-303-610(4)(c)]

The permit modification request will include the statement that closure activities, will of necessity, take longer than 180 days to complete, and the supporting basis for the statement. The permit modification request will also include necessary information demonstrating that all steps to prevent threats to HHE have been and will continue to be taken, including compliance with all applicable permit requirements. [WAC 173-303-610(4)(b)]

The closure certification will be submitted to Ecology within 60 days following completion of closure activities at 271-T Cage DWMU (Table H-7 and Figure H-6).

**Table H-7 271-T Cage Dangerous Waste Management Unit Closure Schedule**


Activity	Description	Duration
<b>Closure Activities</b>		
Remove All Waste	Package and ship dangerous and mixed waste to a RCRA permitted facility for treatment, storage, or disposal.	Completed (Section H.3.1)
Records Review	Perform review of 271-T Cage container storage, operating, and inspection records.	Completed (Section H.3.2)
Perform Visual Inspection of the 271-T Cage	Inspect concrete surface for dangerous or mixed waste related staining.	Completed (Section H.3.2)
	Inspect for visible holes, cracks, crevices, pits, joints/seams, or other breaches in structural integrity. Identify focused sampling locations (as applicable).	



**Table H-7 271-T Cage Dangerous Waste Management Unit Closure Schedule**

<b>Activity</b>	<b>Description</b>	<b>Duration</b>
Address Concrete Surface of the 271-T Cage	Decontaminate the 271-T Cage concrete surface as defined in Section H.3.4.	100 Days
	Perform concrete chip sampling and analysis in accordance with the SAP (Section H.4.4)	
	Perform data verification/validation and data quality assessment (Section H.4.5).	
	If necessary, remove contaminated concrete, resample, and analyze (Section H.4.4).	
Address Soil Beneath 271-T Cage	Perform focused soil sampling and analysis in accordance with SAP (Section H.4.4).	70 Days
	Perform data validation/verification and data quality assessment (Section H.4.5).	
	If necessary, remove contaminated environmental media, resample, and analyze (Section H.4.4).	
Confirm Clean Closure	Review sample results from contract analytical laboratory. Ensure closure performance standards were met (Section H.5.1).	10 Days
<b>Closure Certification</b>		
Permittees and IQRPE Submit Closure Certification	Within 60 days of completion of closure activities, submit certification to Ecology that the DWMU has been closed in accordance with the specifications in the approved closure plan (Section H.5.2 and H.5.3).	60 Days

Reference: WAC 173-303-610, Dangerous Waste Regulations, *Closure and post-closure*.

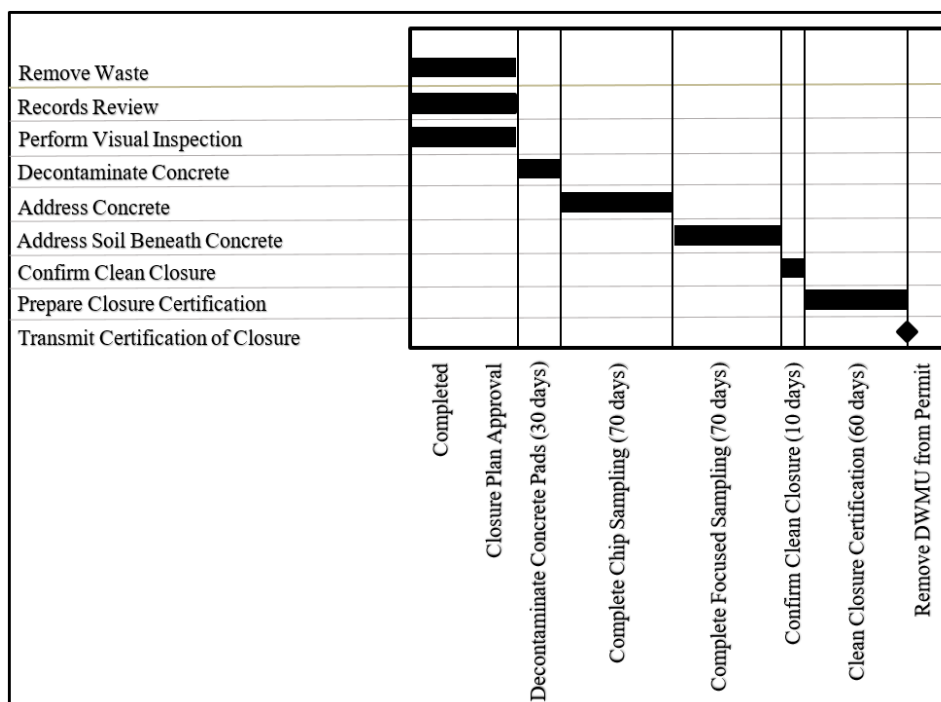

**Figure H-6 271-T Cage Closure Schedule Activities**

## H.7 Closure Costs

An annual report outlining updated projections of anticipated closure costs for the Hanford Facility treatment, storage, and disposal units is not required per Permit Condition II.H.

## H.8 References

- 17-AMRP-0217, 2017, "Dangerous Waste Management Unit (DWMU) 277-T Building Closure Plan Comment Disposition, and Performance Standards for Future Solid Waste Operations Complex (SWOC) Closure Plans" (letter to Alexandra K. Smith, Nuclear Waste Program, from Joe R. Franco), DOE-RL, Richland, Washington, July 12. Available at: <http://pdw.hanford.gov/arpir/index.cfm/viewDoc?accession=0069231H>.
- 17-NWP-100, 2017, "Dangerous Waste Management Unit (DWMU) 277-T Building Closure Plan Comment Disposition and Performance Standards for Future Solid Waste Operations Complex (SWOC) Closure Plans" (letter to Joe Franco, DOE-RL, from Suzanne Dahl), Nuclear Waste Program, Ecology, Richland, Washington, August 14. Available at: <http://pdw.hanford.gov/arpir/index.cfm/viewDoc?accession=0069016H>.
- 21-NWP-033, 2021, "Approval of Permit Change Notices and Part A Forms to Transfer Co-Operator Responsibilities for the *Hanford Facility Resource Conservation and Recovery Act Permit, Dangerous Waste Portion, Revision 8c, for the Treatment, Storage, and Disposal of Dangerous Waste* (Site-wide Permit), WA7890008967" (letter to Brian T. Vance, DOE-RL/ORP and Scott Sax, CPCCo, from Stephanie Schleif), Nuclear Waste Program, Ecology, Richland, Washington, March 15. Available at: <https://pdw.hanford.gov/document/AR-10235>.
- 40 CFR 268, *Land Disposal Restrictions*, Code of Federal Regulations. Available at: <http://www.gpo.gov/fdsys/pkg/CFR-2010-title40-vol26/xml/CFR-2010-title40-vol26-part268.xml>.
- 268.45, *Treatment Standards for Hazardous Debris*.

- 1 ASTM International, 2017, *Annual Book of ASTM Standards*, ASTM International, West Conshohocken,  
2 Pennsylvania.
- 3 Department of Defense, 2013, *DoD Environmental Field Sampling Handbook*, Revision 1.0. Available at:  
4 <https://docplayer.net/15449171-Dod-environmental-field-sampling-handbook-revision-1-0.html>.
- 5 DOE/RL-92-24, 2001, *Hanford Site Background: Part 1, Soil Background for Nonradioactive Analytes*,  
6 Revision 4, 2 Volumes, DOE-RL, Richland, Washington. Available at:  
7 <http://pdw.hanford.gov/arpir/index.cfm/viewDoc?accession=0096062>.  
8 <http://pdw.hanford.gov/arpir/index.cfm/viewDoc?accession=0096061>.
- 9 DOE/RL-94-02, 2014, *Hanford Emergency Management Plan*, Revision 6, DOE-RL, Richland,  
10 Washington. Available at: [https://www.emcbc.doe.gov/SEB/TCC/Documents/Document](https://www.emcbc.doe.gov/SEB/TCC/Documents/DocumentLibrary/011819/Core Functions/DOE RL 94-02, Rev 6 Hanford Emergency Management Plan.pdf)  
11 [Library/011819/Core Functions/DOE RL 94-02, Rev 6 Hanford Emergency Management](https://www.emcbc.doe.gov/SEB/TCC/Documents/DocumentLibrary/011819/Core Functions/DOE RL 94-02, Rev 6 Hanford Emergency Management Plan.pdf)  
12 [Plan.pdf](https://www.emcbc.doe.gov/SEB/TCC/Documents/DocumentLibrary/011819/Core Functions/DOE RL 94-02, Rev 6 Hanford Emergency Management Plan.pdf).
- 13 ECF-HANFORD-11-0038, 2012, *Soil Background for Interim Use at the Hanford Site*, Revision 0,  
14 CHPRC, Richland, Washington. Available at:  
15 <http://pdw.hanford.gov/arpir/index.cfm/viewDoc?accession=0088381>.
- 16 Ecology, 2013, "Issues Associated with Establishing Soil Cleanup Levels for Arsenic" (letter to  
17 Jane Hedges and John Price, Nuclear Waste Program, from Dave Bradley), Toxics Cleanup  
18 Program, Ecology, Olympia, Washington, June 11. Available at:  
19 <http://pdw.hanford.gov/arpir/pdf.cfm?accession=1309180453>.
- 20 Ecology, 2019, *Cleanup Levels and Risk Calculation (CLARC) Data Tables*, Toxics Cleanup Program,  
21 Ecology, Olympia, Washington. Available at:  
22 <https://fortress.wa.gov/ecy/clarc/CLARCHome.aspx>.
- 23 Ecology, EPA, and DOE, 1989, *Hanford Federal Facility Agreement and Consent Order*, 2 Volumes,  
24 as amended, Ecology, EPA, and DOE, Olympia, Washington. Available at:  
25 <https://www.hanford.gov/page.cfm/TriParty>.
- 26 Ecology Publication #94-111, 2005, *Guidance for Clean Closure of Dangerous Waste Units and*  
27 *Facilities*, as amended, Ecology, Olympia, Washington. Available at:  
28 <https://fortress.wa.gov/ecy/publications/documents/94111.pdf>.
- 29 EPA/240/B-06/001, 2006, *Guidance on Systematic Planning Using the Data Quality Objectives Process*,  
30 EPA QA/G-4, Office of Environmental Information, EPA, Washington, D.C. Available at:  
31 [http://www2.epa.gov/sites/production/files/documents/guidance\\_systematic\\_planning\\_dqo\\_proce](http://www2.epa.gov/sites/production/files/documents/guidance_systematic_planning_dqo_process.pdf)  
32 [ss.pdf](http://www2.epa.gov/sites/production/files/documents/guidance_systematic_planning_dqo_process.pdf).
- 33 EPA/240/R-02/005, 2002, *Guidance on Choosing a Sampling Design for Environmental Data Collection*  
34 *for Use in Developing a Quality Assurance Project Plan*, EPA QA/G-5S, Office of Environmental  
35 Information, EPA, Washington, D.C. Available at:  
36 <http://nepis.epa.gov/Exe/ZyPURL.cgi?Dockey=20011HKB.txt>.
- 37 EPA/540/P-91-008, 1991, *Compendium of ERT Waste Sampling Procedures*, OSWER Directive  
38 9360.4-07, Office of Environmental Information, EPA, Washington, D.C. Available at:  
39 [https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
40 [Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
41 [n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
42 [ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTx](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
43 [t%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
44 [=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
45 [i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache)  
46 [Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache](https://nepis.epa.gov/Exe/ZyNET.exe/10001YJH.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1991+Thru+1994&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A%5Czyfiles%5CIndex%20Data%5C91thru94%5CTxt%5C00000000%5C10001YJH.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h%7C-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=hpfr&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURLhttps://webcache).

1 googleusercontent.com/search?q=cache:MvFUXc7VW4oJ:https://nepis.epa.gov/Exe/ZyPURL.cg  
2 i%3FDockey%3D10001YJH.TXT+&cd=1&hl=en&ct=clnk&gl=ush.

3 USEPA-540-R-08-01, 2008, *National Functional Guidelines for Superfund Organic Methods Data*  
4 *Review*, USEPA Contract Laboratory Program, OSWER 9240.1-48, Office of Superfund  
5 Remedial Technology and Innovation, EPA, Washington, D.C. Available at:  
6 [http://www2.epa.gov/sites/production/files/2015-03/documents/somnfg\\_0.pdf](http://www2.epa.gov/sites/production/files/2015-03/documents/somnfg_0.pdf).

7 USEPA-540-R-10-011, 2010, *National Functional Guidelines for Inorganic Superfund Data Review*,  
8 USEPA Contract Laboratory Program, OSWER 9240.1-51, Office of Superfund Remedial  
9 Technology and Innovation, EPA, Washington, D.C. Available at:  
10 <http://www2.epa.gov/sites/production/files/2015-03/documents/ism1nfg.pdf>.

11 EPA Docket No. RCRA-10-2013-0113, Consent Agreement and Final Order issued by EPA by Section  
12 3008(a) of the RCRA, 42 U.S.C § 6928(a), June 26, 2013, EPA Region 10. Available at:  
13 [https://yosemite.epa.gov/OA/RHC/EPAAdmin.nsf/Filings/F8BB03C511F1D24A85257B98001B](https://yosemite.epa.gov/OA/RHC/EPAAdmin.nsf/Filings/F8BB03C511F1D24A85257B98001BCAD0/$File/RCRA-10-2013-0113%20CAFO_OCR.pdf)  
14 [CAD0/\\$File/RCRA-10-2013-0113%20CAFO\\_OCR.pdf](https://yosemite.epa.gov/OA/RHC/EPAAdmin.nsf/Filings/F8BB03C511F1D24A85257B98001BCAD0/$File/RCRA-10-2013-0113%20CAFO_OCR.pdf).

15 Howard, P. H., R.S. Boethling, W. F. Jarvis, W. M. Meyland, and E.M. Michalenko, 1991, *Handbook of*  
16 *Environmental Degradation Rates*, Lewis Publishers, Chelsea, Michigan.

17 NIOSH, 2010, *NIOSH Pocket Guide to Chemical Hazards*, Department of Health and Human Services  
18 (Centers for Disease Prevention and Control and National Institute for Occupational Safety and  
19 Health), Washington, D.C. Available at: <https://www.cdc.gov/niosh/npg/default.html>.

20 PNNL-23211, 2014, *Visual Sample Plan Version 7.0 User's Guide*, Pacific Northwest National  
21 Laboratory Richland, Washington. Available at: <https://vsp.pnnl.gov/>.

22 *Resource Conservation and Recovery Act of 1976*, 42 U.S.C. 6901, et seq. Available at:  
23 <https://elr.info/sites/default/files/docs/statutes/full/rcra.pdf>.

24 RCW 70A.300, *Hazardous Waste Management*, Olympia, Washington. Available at:  
25 <https://app.leg.wa.gov/RCW/default.aspx?cite=70A.300>.

26 SW-846, 2015, *Test Methods for Evaluating Solid Waste: Physical/Chemical Methods*, Third Edition,  
27 Final Update V, Office of Solid Waste and Emergency Response, EPA, Washington, D.C.  
28 Available at: <https://www.epa.gov/hw-sw846>.

29 WAC 173-303, *Dangerous Waste Regulations*, Washington Administrative Code, Olympia, Washington.  
30 Available at: <http://apps.leg.wa.gov/WAC/default.aspx?cite=173-303>.

31 173-303-140, *Land disposal restrictions*.

32 173-303-170, *Requirements for generators of dangerous waste*.

33 173-303-200, *Conditions for exemption for a large quantity generator that accumulates*  
34 *dangerous waste*.

35 173-303-230, *Special conditions*.

36 173-303-310, *Security*.

37 173-303-350, *Contingency plan and emergency procedures*.

38 173-303-610, *Closure and post-closure*.

39 173-303-620, *Financial requirements*.

40 173-303-630, *Use and management of containers*.

41 173-303-830, *Permit changes*.

1 WAC 173-340, *Model Toxics Control Act—Cleanup*, Washington Administrative Code, Olympia,  
2 Washington. Available at: <http://apps.leg.wa.gov/WAC/default.aspx?cite=173-340>.  
3 173-340-740, *Unrestricted land use soil cleanup standards*.  
4 173-340-747, *Deriving soil concentrations for groundwater protection*.  
5 173-340-7493, *Site-specific terrestrial ecological evaluation procedures*.  
6 173-340-750, *Cleanup standards to protect air quality*.  
7 173-340-900, *Tables*.

1  
2  
3  
4  
5  
6

**ATTACHMENT A**  
**T PLANT 271-T CAGE VISUAL INSPECTION**  
**SUPPORTING DOCUMENTATION**

1  
2  
3  
4  
5

This page intentionally left blank.

T Plant Complex 271-T Cage

**Purpose:**

A visual inspection of the T Plant Complex 271-T Cage was performed to identify low points, seams, cracks, and crevices for the purpose of focused sampling during closure. If a random sample determined through the use of the Visual Sampling Plan software was already identified in the vicinity of a low point, crack, or crevice, additional focused samples were not deemed necessary.


The inspection was performed on June 01, 2015.

**Results:**

During the inspection, no waste related staining, low points, cracks, or crevices were identified that would result in focused sampling.

Signature/Date:

Sarah Horn

 2/18/16



### **T Plant Complex 271-T Cage Container Storage Area**

**Purpose:**

A visual inspection walkdown of the T Plant Complex outdoor 271-T Cage container storage area was performed to determine if there is any evidence of spills and/or leaks from waste packages containing dangerous waste that was stored at this location from past operations. The inspection was to identify and document by photographing any waste related staining of the storage area surface (i.e., gravel and soil), and to denote any remaining waste related items.

The inspection was performed on August 15, 2013 by Brett M. Barnes (CHPRC) Environmental Compliance Officer.

**Results:**

No staining of any kind was identified on the concrete storage area surface. Area was thoroughly photographed.

Housekeeping, if determined necessary, will be performed on the area prior to closure.

**Signature/Date:**

Brett M. Barnes:

Brett M. Barnes 9/3/13

1  
2  
3  
4  
5  
6

**ATTACHMENT B**  
**T PLANT 271-T CAGE VISUAL SAMPLE PLAN**  
**SUPPORTING DOCUMENTATION**

1  
2  
3  
4  
5

This page intentionally left blank.

## Predetermined Number of Systematic Sampling Locations

### Summary

This report summarizes the sampling design, associated statistical assumptions, as well as general guidelines for conducting post-sampling data analysis. Sampling plan components presented here include how many sampling locations to choose and where within the sampling area to collect those samples. The type of medium to sample (i.e., soil, groundwater, etc.) and how to analyze the samples (in-situ, fixed laboratory, etc.) are addressed in other sections of the sampling plan.

The following table summarizes the sampling design. A figure that shows sampling locations in the field and a table that lists sampling location coordinates are also provided below.

SUMMARY OF SAMPLING DESIGN	
Primary Objective of Design	Direct Comparison of chip sample results to numeric closure performance standards
Sample Placement (Location) in the Field	Systematic with a random start location
User specified number of samples	5
Number of samples on map <sup>a</sup>	5
Number of selected sample areas <sup>b</sup>	1
Specified sampling area <sup>c</sup>	200.00 ft <sup>2</sup>
Size of grid / Area of grid cell <sup>d</sup>	6.79618 feet / 40 ft <sup>2</sup>
Grid pattern	Triangular

<sup>a</sup> This number may differ from the calculated number because of 1) grid edge effects, 2) adding judgment samples, or 3) selecting or unselecting sample areas.

<sup>b</sup> The number of selected sample areas is the number of colored areas on the map of the site. These sample areas contain the locations where samples are collected.

<sup>c</sup> The sampling area is the total surface area of the selected colored sample areas on the map of the site.

<sup>d</sup> Size of grid / Area of grid cell gives the linear and square dimensions of the grid used to systematically place samples.



Northwest corner (0, 0)

Area: Area 2						
X Coord	Y Coord	Label	Value	Type	Historical	Sample Area
3.0627	2.8110	271-T-1		Systematic		
9.8588	2.8110	271-T-2		Systematic		
16.6550	2.8110	271-T-3		Systematic		
6.4607	8.6967	271-T-4		Systematic		
13.2569	8.6967	271-T-5		Systematic		

### Primary Sampling Objective

The primary purpose of sampling at this site is unknown to Visual Sample Plan. The number of samples may have been calculated in another sampling design in Visual Sample Plan, or may have been calculated externally to VSP. Alternatively, the purpose may be based entirely on professional judgment.

### Selected Sampling Approach

This sampling approach is to determine if decontamination was successful. Systematic non-statistical sampling was created with a pre-determined number of samples based on professional judgement. Locating the sample points over a systematic grid with a random start ensures spatial coverage of the site and eliminates bias when selecting sampling locations. Locating the sample points systematically provides data that are all equidistant apart and ensures that all portions of the site are equally represented.

This report was automatically produced\* by Visual Sample Plan (VSP) software version 7.12a.

This design was last modified 9/26/2019 1:43:46 PM.

Software and documentation available at <http://vsp.pnnl.gov>

Software copyright (c) 2019 Battelle Memorial Institute. All rights reserved.

\* - The report contents may have been modified or reformatted by end-user of software.