SCAL 4 IN. = 1 MILE

FOR SALE BY

METSKER MAPS

111 SOUTH 10TH ST. TACOMA, WASHINGTON
1020 THIRD AVE., SEATTLE, WASHINGTON

TOWNSH

39

PI

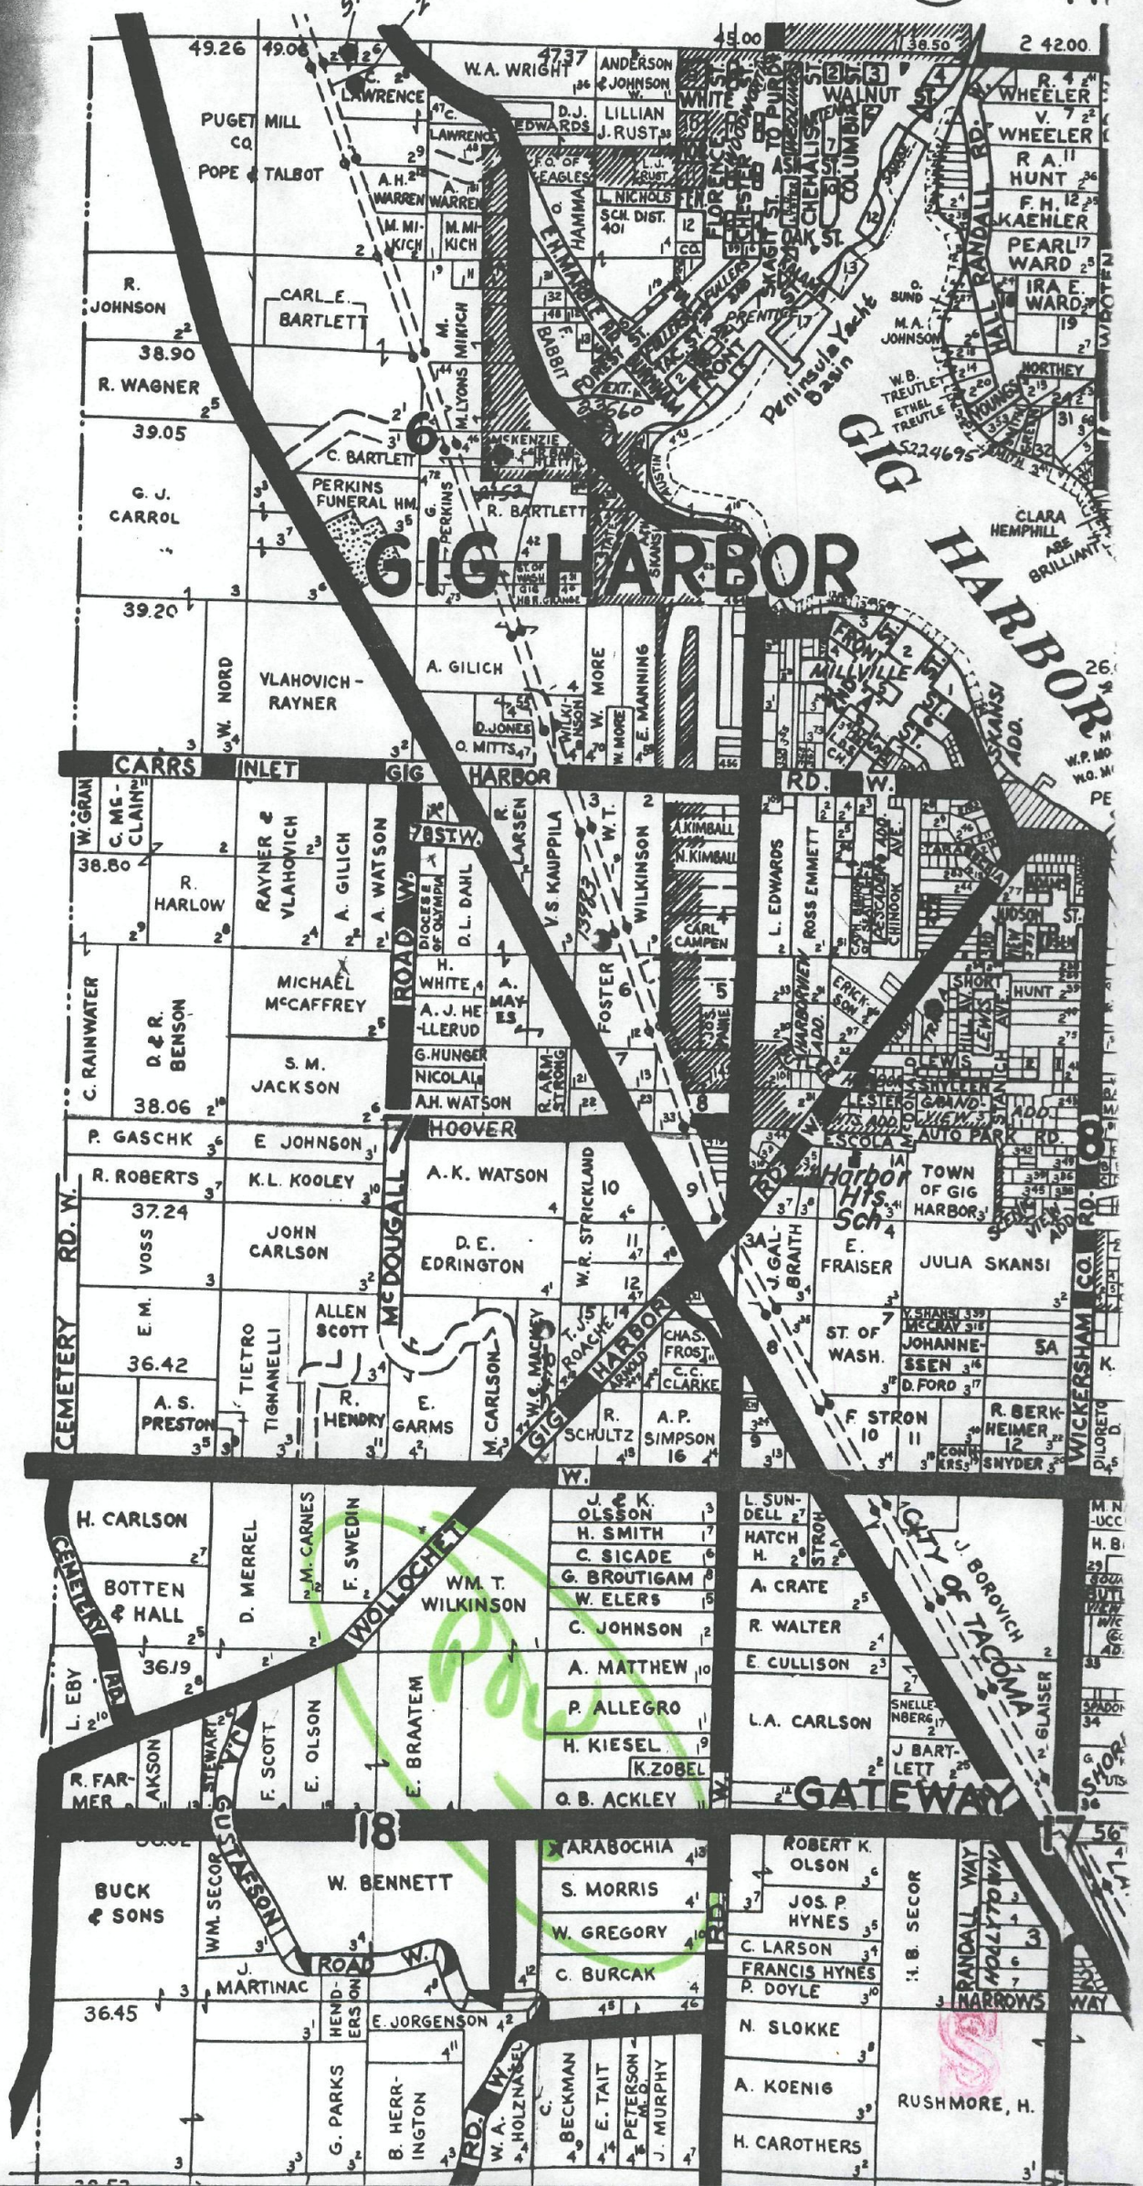

SURVEYORS CERTIFICATE:

I HEREBY CERTIFY that the plat of "EDGEWOOD MANOR" is based upon an actual survey; that the distances and courses are shown correctly; that the monuments have been set and lot corners staked correctly on the ground; that I have fully complied with the provisions of the statutes and of the regulations governing platting.

Guy R. Wheeler

GUY R. WHEELER, Licensed Land Surveyor No. 1158

CURVE DATA

① Δ = 86°-21'-53"
T = 18.77'
L = 30.15'
R = 20.00'

② Δ = 93°-38'-07"
T = 21.31'
L = 32.68'
R = 20.00'

③ Δ = 86°-21'-53"
T = 18.77'
L = 30.15'
R = 20.00'

LEGEND:

- Monument Found
- Stone Monument Set
- Pipe Set

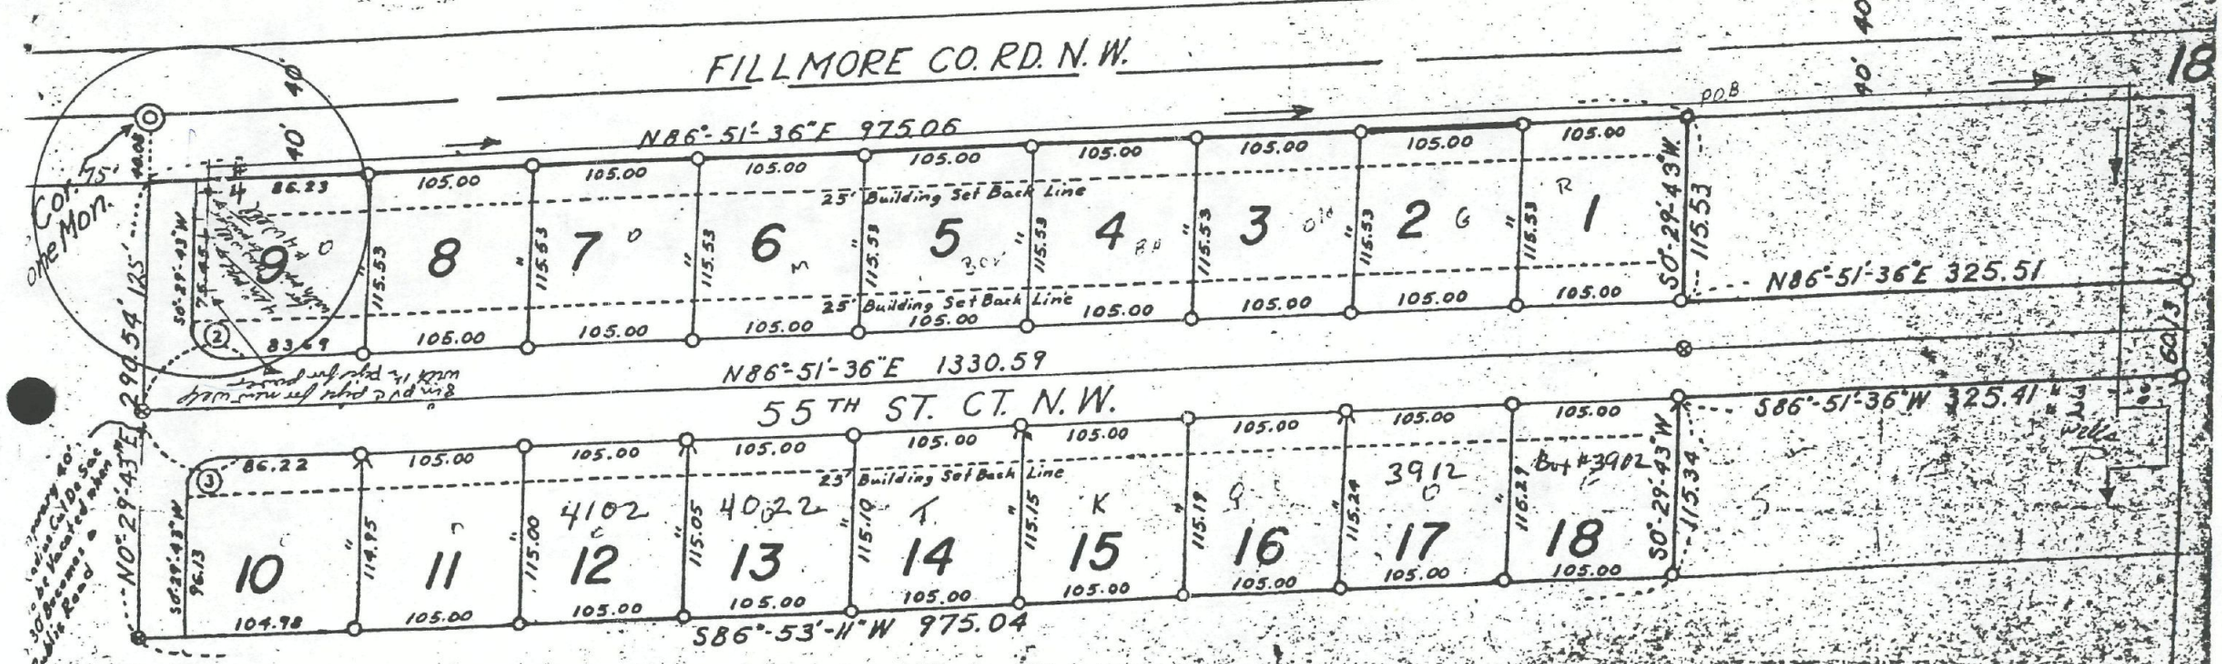

File Original and First Copy with Department of Ecology
Second Copy — Owner's Copy
Third Copy — Driller's Copy

RECEIVED
APR 2 1979
DEPARTMENT OF ECOLOGY
SOUTHWEST REGIONAL OFFICE

WATER WELL REPORT
STATE OF WASHINGTON

Application No. G2-25126
Permit No.

(1) OWNER: Name Fred Stroh Address 3302 Hun[illegible] N.W., Gig Harbor, Wn.9833

(2) LOCATION OF WELL: County Pierce — NE¼ SE¼ Sec. 18 T. 21 N., R. 2E W.M.

Bearing and distance from section or subdivision corner 220' S & 70' W of E¼ corner of Sec 18

(3) PROPOSED USE: Domestic ☒ Industrial ☐ Municipal ☐ Irrigation ☐ Test Well ☐ Other ☐

(4) TYPE OF WORK: Owner's number of well (if more than one)....
New well ☒ Method: Dug ☐ Bored ☐
Deepened ☐ Cable ☒ Driven ☐
Reconditioned ☐ Rotary ☐ Jetted ☐

(5) DIMENSIONS: Diameter of well 8 inches.
Drilled 319 ft. Depth of completed well 319 ft.

(6) CONSTRUCTION DETAILS:

Casing installed: 8 " Diam. from 0 ft. to 319 ft.
Threaded ☐ " Diam. from ft. to ft.
Welded ☒ " Diam. from ft. to ft.

Perforations: Yes ☐ No ☒
Type of perforator used
SIZE of perforations in. by in.
perforations from ft. to ft.
perforations from ft. to ft.
perforations from ft. to ft.

Screens: Yes ☒ No ☐
Manufacturer's Name Johnson
Type stainless steel Model No.
Diam. 8" Slot size 40 from 312 ft. to 319 ft.
Diam. Slot size from ft. to ft.

Gravel packed: Yes ☐ No ☒ Size of gravel:
Gravel placed from ft. to ft.

Surface seal: Yes ☒ No ☐ To what depth? 18 ft.
Material used in seal Bentonite
Did any strata contain unusable water? Yes ☐ No ☒
Type of water? Depth of strata
Method of sealing strata off

(7) PUMP: Manufacturer's Name
Type: H.P.

(8) WATER LEVELS: Land-surface elevation above mean sea level.... ft.
Static level 244 ft. below top of well Date
Artesian pressure lbs. per square inch Date
Artesian water is controlled by (Cap, valve, etc.)

(9) WELL TESTS: Drawdown is amount water level is lowered below static level
Was a pump test made? Yes ☐ No ☐ If yes, by whom?
Yield: gal./min. with ft. drawdown after hrs.
" " " "
" " " "

Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)

Time	Water Level	Time	Water Level	Time	Water Level

Date of test
Bailer test 60 gal./min. with 16 ft. drawdown after 1 hrs.
Artesian flow g.p.m. Date
Temperature of water Was a chemical analysis made? Yes ☐ No ☐

(10) WELL LOG:

Formation: *Describe by color, character, size of material and structure, and show thickness of aquifers and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of formation.*

MATERIAL	FROM	TO
Sandy brown top soil	0	4
Brown sand & gravel, clay binder	4	17
Dark brown sand & gravel	17	33
Gray clay	33	47
Gray sand & gravel, some seepage	47	71
Brown sand & gravel	71	74
Gray sandy clay	74	82
Gray hard packed gravel, some seepage	82	84
Gray hardpan	84	106
Gray sand & gravel, some water	106	117
Coarser gray gravel, some water	117	130
Gray clay	130	145
Gray hardpan	145	149
Brown water bearing sand & gravel	149	151
Brown sand & gravel some binder	151	166
Brown hardpan	166	172
Dry brown sand	172	196
Brown hardpan	196	210
Brown sand & gravel, clay binder	210	228
Gray clay	228	234
Rust colored sand	234	256
Rust colored sand & gravel, some seepage	256	280
Brown sand & gravel, some binder	280	290
Fine brown sand, some seepage	290	308
Coarser brown sand & gravel heaving	308	317

Work started 1-17, 19 79 Completed 2-7, 19 79

WELL DRILLER'S STATEMENT:

This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

NAME HARBOR PUMP & DRILLING CO., INC.
(Person, firm, or corporation) (Type or print)

Address 11302 Burnham Dr., N.W., Gig Harbor, Wash. 9833

[Signed] Elmer Colglazier By: M. Butler
(Well Driller)

License No. 0078 223-01-8455 Date Feb. 19, 19 79

OK RMB 9-21-79

(USE ADDITIONAL SHEETS IF NECESSARY)

ECY 050-1-20

RECEIPT 179365

WASHINGTON STATE
DEPARTMENT OF ECOLOGY

..... , 19 .....

RECEIVED FROM ..... Ron Pine Co

..... DOLLARS 10.00

FUND:

General ..... Rec.Rev. ..... Basic Data ..... Other ..... Cash .....

SOURCE: Check .....

Water Code ..... Publications ..... Adjudications ..... Refunds ..... M.O. .....

Per. and Lic. ..... Investments ..... Registration ..... Other .....

..... Permit 10.00

By .....

Thank You

ECY 010-144