



State of Washington  
REPORT OF EXAMINATION  
FOR WATER RIGHT APPLICATION  
**G1-28760**

File No. G1-28760  
WAC Doc ID: 6006387

**PRIORITY DATE**  
November 12, 2013

**APPLICATION NUMBER**  
G1-28760

**MAILING ADDRESS**  
James Spane  
1611 Buck Way  
Mount Vernon, WA 98273

**SITE ADDRESS (IF DIFFERENT)**  
31628 19th Dr. NW  
Stanwood, WA 98292

**Quantity Authorized for Withdrawal or Diversion**

DIVERSION RATE	UNITS	ANNUAL QUANTITY (AF/YR)
10	GPM	0.39

**Purpose**

PURPOSE	WITHDRAWAL OR DIVERSION RATE			ANNUAL QUANTITY (AF/YR)		PERIOD OF USE (mm/dd)
	ADDITIVE	NON-ADDITIVE	UNITS	ADDITIVE	NON-ADDITIVE	
Single Domestic Use	10		GPM	0.39		Continuous

**Source Location**

WATERBODY	TRIBUTARY TO	COUNTY	WATER RESOURCE INVENTORY AREA
Well		Snohomish	07

SOURCE FACILITY/DEVICE	PARCEL	TWN	RNG	SEC	QQ Q	LATITUDE	LONGITUDE
Well (Well Tag # BAT466)	01075700001000	32N	04E	2	SE	48.284228N	-122.258039W

Datum: WGS84

**Place of Use (See Map, Attachment 1)**

**PARCEL**

01075700001000 (Lot 10 of Sun Peak Estates)

**LEGAL DESCRIPTION OF AUTHORIZED PLACE OF USE**

Parcel 01075700001000 (Lot 10 of Sun Peak Estates) located in Section 2, Township 32N, Range 4E, SE Quarter in Snohomish County.

(see **Attachment 2** for a full legal description)

**Proposed Works**

The system will consist of a well and water distribution system to one home.

**Development Schedule**

BEGIN PROJECT	COMPLETE PROJECT	PUT WATER TO FULL USE
Started	December 31, 2023	December 31, 2028

**Measurement of Water Use**

How often must water use be measured?	Monthly
How often must water use data be reported to the Department of Ecology (Ecology)?	Monthly during the first two years of water use, then Annually
What volume should be reported?	Total Annual Volume and each monthly volume
What rate should be reported?	Annual Peak Rate of Withdrawal (gpm)

**Provisions**

You have demonstrated to Ecology's satisfaction that when your proposed mitigation plan, as conditioned below, is implemented, the proposed withdrawal and use of groundwater from the well on your property will not impair senior water rights, including instream flow rights, or be detrimental to the public interest or welfare. Accordingly, Ecology **approves** the mitigation plan insofar as it relates to the well on your property, as documented in Exhibits B and C to Sundberg Homes, Inc., et al. *Request/Petition for Declaratory Order or alternatively, Approval of Mitigation Plan*, dated November 9, 2012, subject to the following conditions:

1. As the proponent of the mitigation plan insofar as it relates to the well on your property, you are responsible for the ongoing commitments of its implementation as long as you own the property. In the event that the property is sold or transferred, all obligations of this mitigation plan are binding on your successors in interest.

2. Your well on lot 10 of Sun Peak Estates shall be deepened to intercept water from the regional Sedimentary Aquifer. Evidence of the well deepening through well logs shall be submitted to Ecology before water from the well can be used.
3. Your average water use shall not exceed 350 gallons of water per day in any month.
4. You may not use water from the well on your property to water a lawn or garden or for any similar outdoor use, including any other consumptive use, *provided* that you may use such water outside to wash a car or other vehicle, to wash a dog or other pet that lives in the house, or for other minor, non-consumptive uses of like kind. Except as otherwise provided in this paragraph, the well on your property must only supply the indoor plumbing system. Connection to the outdoor plumbing system, such as exterior faucets or hose bibs, by the well on your property is prohibited, except for a single faucet or hose bib within 25 feet of a driveway or garage entrance. The prohibition on connection to outdoor plumbing in this paragraph shall remain applicable unless and until another lawful approval is obtained for the withdrawal and use of water from the well on your property that allows you to use water from the well for outdoor watering and to connect the well to outdoor plumbing. This condition does not prohibit the use of stand-alone cisterns, rain barrels, or other rainwater catchment systems for outdoor water use or other consumptive use so long as they are solely supplied by captured rooftop rainwater or water that is trucked in from off-site, you provide at least 30 days advance written notice to Ecology of your intent to use such water before commencing such use, including a description of the type and design of the system you intend to use, and you obtain such approvals, if any, as may be legally required for such use. Ecology may monitor your compliance with the provisions in this paragraph through lawful on-site visits and aerial photography, and will investigate reports of non-compliance by third parties. You will provide Ecology with permission to enter Sun Peaks Estates for such purposes.
5. All water use shall be measured with a meter at the wellhead that meets the requirements of WAC 173-173-090 and WAC 173-173-100. The meter shall be installed, operated, and maintained in accordance with WAC 173-173-110 and WAC 173-173-120. During the first two years of water use, you shall deliver monthly water use reports to Ecology by the 15<sup>th</sup> day of the following month. After the first two years of water use, you shall deliver monthly water use reports to Ecology annually on October 31<sup>st</sup> of each year (for the period from October 1 of the preceding year through September 30 of the current year). If the property is sold or transferred, the new owner shall provide monthly water use reports to Ecology by the 15<sup>th</sup> day of the following month during the first two years of water use and thereafter shall deliver monthly water use reports to Ecology annually on October 31<sup>st</sup> of each year (for the period from October 1 of the preceding year through September 30 of the current year). If monthly or annual water use reporting demonstrates a potential violation of condition number 3 above and water use is not required to cease under condition numbers 9 or 10 below, Ecology shall require monthly reporting until it appears that water use has complied with condition number 3 above for at least 24

consecutive months. Compliance with this provision is subject to inspection by Ecology through lawful on-site visits.

6. Your on-site sewage disposal system shall be inspected at a frequency outlined in WAC 246-272A-0270. Copies of the inspection reports shall be provided to Ecology. You will provide Ecology with permission to enter Sun Peaks Estates for such purposes.
7. Your sewage disposal shall remain through on-site sewage disposal. If sewage from your property is exported through a sanitary sewer system, the use of water from your well shall cease until an alternative source of mitigation water is found and approved by Ecology.
8. Notice of the Sundberg Homes, Inc, et al. Request for Approval of Mitigation Plan shall be incorporated in your property title by recording this Report of Examination in the Snohomish County Auditor's Office. The notice shall include a copy of the Sundberg Homes, Inc, et al. Request for Approval of Mitigation Plan and this Report of Examination.
9. Non-compliance with any of these conditions may result in penalties or an administrative order to cease using water per RCW 90.03.600 and 90.03.605.
10. Pursuant to WAC 173-503-060(c), if monitoring of this mitigation plan shows the mitigation is not effective, Ecology approval of the mitigation plan shall be suspended and water use shall cease until Ecology approves a new or revised mitigation plan.

The mitigation plan approved for your permit, through this Report of Examination, authorizes only the withdrawal and use of water from the well located on your property, and, except as otherwise provided in condition 4 above, the mitigation plan conditions set forth in this letter apply only to the withdrawal and use of water from that well. All of the mitigation plan conditions set forth in this report shall remain applicable to the withdrawal and use of water from the well located on your property notwithstanding any sale or other transfer or conveyance of the property, unless and until another lawful approval is obtained for the withdrawal and use of water from that well.

#### **Water Use Efficiency**

The water right holder is required to maintain efficient water delivery systems and use of up-to-date water conservation practices consistent with RCW 90.03.005.

#### **Proof of Appropriation**

The water right holder shall file the notice of Proof of Appropriation of water (under which the certificate of water right is issued) when the permanent distribution system has been constructed and the quantity of water required by the project has been put to full beneficial use. The certificate will reflect the extent of the project perfected within the limitations of the permit.

Elements of a proof inspection may include, as appropriate, the source(s), system instantaneous

capacity, beneficial use(s), annual quantity, place of use, and satisfaction of provisions.

### **Schedule and Inspections**

Department of Ecology personnel, upon presentation of proper credentials, shall have access at reasonable times, to the project location, and to inspect at reasonable times, records of water use, wells, diversions, measuring devices and associated distribution systems for compliance with water law.

### **Findings of Facts**

Upon reviewing the investigator's report, I find all facts, relevant and material to the subject application, have been thoroughly investigated.

Furthermore, I concur with the investigator and find that: water is available from the source in question; that there will be no impairment of existing rights; that the purpose(s) of use are beneficial; and that there will be no detriment to the public interest or welfare.

Therefore, I ORDER approval of Application No. G1-28760, subject to existing rights and the provisions specified above.

Further, I ORDER that at the time a permit is issued to you under this approval, such permit shall supersede the Department of Ecology's May 1, 2013, letter to you approving your mitigation plan as documented in Exhibits B and C to Sundberg Homes, Inc., et al. *Request/Petition for Declaratory Order or alternatively, Approval of Mitigation Plan*, dated November 9, 2012, and the Department of Ecology's May 1, 2013, letter to you shall be rescinded.

### **Your Right To Appeal**

You have a right to appeal this Order to the Pollution Control Hearing Board (PCHB) within 30 days of the date of receipt of this Order. The appeal process is governed by Chapter 43.21B RCW and Chapter 371-08 WAC. "Date of receipt" is defined in RCW 43.21B.001(2).


To appeal you must do the following within 30 days of the date of receipt of the Order.

- File your appeal and a copy of this Order with the PCHB (see addresses below). Filing means actual receipt by the PCHB during regular business hours.
- Serve a copy of your appeal and this Order on Ecology in paper form - by mail or in person. (See addresses below.) E-mail is not accepted.

You must also comply with other applicable requirements in Chapter 43.21B RCW and Chapter 371-08 WAC.

Street Addresses	Mailing Addresses
<b>Department of Ecology</b> Attn: Appeals Processing Desk 300 Desmond Drive SE Lacey, WA 98503	<b>Department of Ecology</b> Attn: Appeals Processing Desk PO Box 47608 Olympia, WA 98504-7608
<b>Pollution Control Hearings Board</b> 111 Israel RD SW STE 301 Tumwater, WA 98501	<b>Pollution Control Hearings Board</b> PO Box 40903 Olympia, WA 98504-0903

Signed at Bellevue, Washington, this 16 day of January, 2014.

  
 \_\_\_\_\_  
 Jacqueline Klug, Section Manager  
 Water Resources Program/NWRO  
 Department of Ecology

Investigator's Report  
 Application for Water Right – James Spane  
 Water Right Control Number: G1-28760  
 Investigator: Jerry Liszak

**BACKGROUND**

The applicant's property is located in the Carpenter-Fisher sub-basin within the Lower Skagit Watershed, also known as Water Resource Inventory Area 3 (WRIA 3). WRIA 3 has an Instream Resources Protection Program rule (WAC 173-503) established in 2001 to protect senior water rights, maintain a healthy ecosystem, and provide limited amounts of water for future uses. Sun Peak Estates (Sun Peak) submitted proposed mitigation plans on behalf of seven landowners, including the applicant, which Washington Department of Ecology (Ecology) modified by allowing for 1/12<sup>th</sup> acre lawn irrigation on each lot while accounting for septic return flow of water into the Fisher basin with water pumped from wells tapping water from an aquifer connected to the adjacent Stillaguamish basin. On May 1, 2013, Ecology approved the mitigation plan and issued seven approval orders to the affected parties owning lots within Sun Peak Estates, including the applicant, with certain conditions, including requiring all the wells to be completed in the deeper Sedimentary Aquifer. The Swinomish Indian Tribal Community (Tribe) appealed Ecology's approvals of the mitigation plans on May 28, 2013.

Subsequent to filing the appeal, the seven Sun Peak lot owners (including the applicant), the Tribe, and Ecology have negotiated a settlement resulting in a mitigation agreement by the parties. The mitigation agreement is implemented through the provisions to this water right set forth on pages 2 through 4 above.

To carry out the settlement, Ecology received a letter from the applicant on November 12, 2013, requesting Ecology to consider the proposed mitigation plan submitted by Sun Peak as an application for a water right permit. Ecology finds that the information in the proposed mitigation plan is sufficient to enable Ecology to consider it as a water right permit application under RCW 90.03.250. Further, Ecology finds that the proposed mitigation plan constitutes a proposed "resource management technique" that is designed to "[offset] the impact of the withdrawal of water proposed in the application for the water right . . . in the same water resource inventory area" under RCW 90.44.055.

**Project Description**

The applicant intends to withdraw groundwater from a well on its property for single domestic use. The system will consist of a well and water distribution system to the home.

**Table 1**  
 Summary of Application No. G1-28760

<i>Attributes</i>	<i>Proposed</i>
Applicant	James Spane

Application Received	November 12, 2013
Instantaneous Quantity	10 gpm
Source	Well (Well Tag # BAT466)
Point of Withdrawal	SE ¼, Section 2, Township 32 North, Range 4 East, W.M.
Purpose of Use	Single Domestic
Period of Use	Continuous
Place of Use	The southeast quarter of Section 2, Township 32 North, Range 4 East of the Willamette Meridian. Located in Snohomish County, Parcel 01075700001000 (Lot 10 of Sun Peak Estates)

**Legal Requirements for Application Processing**

The following requirements must be met prior to processing a water right application:

- **Public Notice**

Notice of this application was published in the Everett Daily Herald on December 7, 2013, and December 14, 2013. No protests were received.

- **State Environmental Policy Act (SEPA)**

A water right application is subject to a SEPA threshold determination (i.e., an evaluation whether there are likely to be significant adverse environmental impacts) if any one of the following conditions are met.

- (a) It is a surface water right application for more than 1 cubic feet per second, unless that project is for agricultural irrigation, in which case the threshold is increased to 50 cubic feet per second, so long as that irrigation project will not receive public subsidies;
- (b) It is a groundwater right application for more than 2,250 gallons per minute;
- (c) It is an application that, in combination with other water right applications for the same project, collectively exceed the amounts above;
- (d) It is a part of a larger proposal that is subject to SEPA for other reasons (e.g., the need to obtain other permits that are not exempt from SEPA);
- (e) It is part of a series of exempt actions that, together, trigger the need to do a threshold determination, as defined under WAC 197-11-305.

The requested water right is part of the Sun Peaks development on a 40-acre parcel comprised of 12 residential lots having individual wells for each home. Because the combined pumping of all

the wells does not meet any of these conditions, it is categorically exempt from SEPA and a threshold determination is not required.

## **INVESTIGATION**

### **Site Visit/Site Description**

On August 8, 2012, Chuck Lindsay, Associated Earth Sciences, Inc., verified the well location, diameter, and Well Tag Number (BAT466). Depth to water measured from the top of the access port was 19.62 feet. Based on a LIDAR surface elevation of 639.59 feet and accounting for a 1.7 foot casing stickup, the static groundwater elevation was 621.67 feet.

### **Other Rights Appurtenant to the Place of Use**

There are no existing water rights appurtenant to the proposed place of use.

### **Hydrogeology**

The ground surface at Sun Peak and the immediate surrounding area is covered by a layer of low permeability glacial till sediments that are underlain at a relatively shallow depth by Chuckanut Formation bedrock. The glacial till sediments are a few tens of feet thick in the vicinity of the site and consist of varying amounts of clay, silt, sand, gravel, cobbles, and boulders. The glacial till is dense, has low permeability, and is considered to act as a confining unit. The Chuckanut Formation consists of alternating intervals of coarse grained sandstone and minor conglomerate and fine grained sandstone and siltstone. Fractured portions of the Chuckanut Formation are referred to as the Sedimentary Aquifer by the USGS (2009). The Sedimentary Aquifer underlies the Sun Peak properties. The aquifer is confined under Sun Peak site and in other areas where it is fully saturated and covered by glacial sediments. It is unconfined in other areas where it crops out. There are also fine grained bedrock intervals within the Sedimentary Aquifer which may produce localized confining conditions. See Attachment 3, *Hydrogeologic Assessment Sun Peaks Estates, Snohomish County*, prepared by Associated Earth Sciences, Inc, dated October 30, 2012.

Well log data indicate regional groundwater flow directions in the Sedimentary Aquifer is generally westerly trending beneath the Sun Peak site, although it is relatively flat and has northern and southern gradient components respectively north and south of the site. Well logs at different completion elevations also suggest there is a downward gradient component. The Sun Peak wells will tap ground water in the Sedimentary Aquifer at an elevation of roughly 500 feet.

### **Well Drilling**

The 12 domestic wells drilled at Sun Peak range in depth from 42 feet to 425 feet and are completed within fractured, water-bearing sedimentary bedrock. The wells all appear to have encountered roughly 25 feet (Lot 11) to 80 feet (Lot 9) of relatively dense, low permeability glacial till overlying sedimentary bedrock. Nine of the onsite wells (Lots 3, 4, 5, 6, 7, 8, 9, 11, and 12) appear to intercept water bearing, fractured sandstone in the Sedimentary Aquifer at depths of greater than 140 feet below the ground surface.

The depths to ground water in eight of the wells ranged between approximately 145 feet (Lot 3) and 177 feet (Lot 12), which correspond to a rough elevation range of 502 feet to 517 feet. The wells on three lots (Lots 1, 2, and 10) appear to intercept localized shallow water-bearing fractures in the upper bedrock unit that begin at depths of roughly 40 to 60 feet. The ground elevation measured by LiDAR at the Lot 10 well site is 640.72 feet. The depth to ground water measured in the shallow wells in August, 2012, ranged from less than 10 feet (Lot 2) to approximately 20 feet (Lot 10), which correspond to a range in elevation from roughly 641 feet to 622 feet. The well for the subject property and water right, Lot 10, must be deepened to intercept water from the regional Sedimentary Aquifer at an elevation below 500 feet as a provision for obtaining a water right permit. The average static water elevations should be below 550 feet. Wells completed in that manner at Sun Peak would be considered to be in the deeper portion of the Sedimentary Aquifer and, therefore, consistent with the provisions of the ROE. Consistent with provision 2 of this report, the well completion report showing the well depth and water elevation depth shall be sent to Ecology before the water can be used under this water right permit.

Yields from the onsite wells, as reported by the well drillers on the water well reports, range from approximately 1.5 gallons per minute (gpm) to 35 gpm. However most of these were determined from bailer tests which are not as accurate as pump tests. Yields from the wells completed in the deeper Sedimentary Aquifer are reported as an average of approximately 11 gpm.

### **Site Hydrogeology**

Ecology reviewed the Sun Peaks Estates Mitigation Plan and Sun Peaks Hydrogeologic Assessment with all relevant hydrogeologic data and reports, including comments and information submitted by the Swinomish Indian Tribal Community. While Ecology agrees with the general concept of the mitigation plan, Ecology is modifying some assumptions in the Sun Peaks Estates mitigation plan to factor in information regarding the United States Geologic Survey (USGS) Groundwater Model, water well logs and other geologic reports. Ecology's analysis included information received from the Tribe and its reference to USGS model estimates of groundwater extraction and recharge percentage effects on the Fisher Creek Basin. This analysis indicates that if the wells on lots 2 and 10 of Sun Peak Estates are deepened to intercept the regional Sedimentary Aquifer, if outdoor water use from the wells is prohibited on the Sun Peak Estates lots as described in the provisions above, and if the other conditions set forth in the provisions above are satisfied, return flow from septic systems at the Sun Peaks lots to the Fisher Creek Basin would mitigate the use and withdrawals' groundwater extraction effects on the Fisher Creek Basin. These findings of fact apply to the applicant's proposed use and withdrawal of water.

### **Four Statutory Tests**

This Report of Examination (ROE) evaluates the application based on the information presented above. To approve the application, Ecology must issue written findings of fact and determine that each of the following four requirements of RCW 90.03.290 has been satisfied:

1. The proposed appropriation would be put to a beneficial use;
2. Water is available for appropriation;
3. The proposed appropriation would not impair existing water rights; and
4. The proposed appropriation would not be detrimental to the public welfare.

### **Beneficial Use**

The Water Resources Act of 1971 (RCW 90.54.020(1)) defines beneficial uses of water. The application requests water for single domestic use. Single domestic use is explicitly listed as a beneficial use under RCW 90.54.020(1); therefore, the proposed use of water is a beneficial use.

### **Availability**

For water to be available for appropriation, it must be both physically and legally available.

#### *Physical Availability*

For water to be physically available for appropriation there must be ground or surface water present in quantities and quality and on a sufficiently frequent basis to provide a reasonably reliable source for the requested beneficial use or uses. In addition, the following factors are considered:

- Volume of water represented by senior water rights, including federal or tribal reserved rights or claims;
- Water right claims registered under Chapter 90.14 RCW;
- Groundwater uses established in accordance with Chapter 90.44 RCW, including those that are exempt from the requirement to obtain a permit; and
- Potential riparian water rights, including non-diversionary stock water.
- Lack of data indicating water usage can also be a consideration in determining water availability, if the department cannot ascertain the extent to which existing rights are consistently utilized and cannot affirmatively find that water is available for further appropriation.

Although the well has not yet been deepened to the proposed depth below 500 feet elevation, other Sun Peak wells have demonstrated that water is available at the proposed elevation near the applicants proposed point of withdrawal.

#### *Legal Availability*

To determine whether water to be legally available for appropriation, the following factors are considered:

- Regional water management plans – which may specifically close certain water bodies to further appropriation.
- Existing rights – which may already appropriate physically available water.
- Fisheries and other instream uses (e.g., recreation and navigation). Instream needs, including instream and base flows set by regulation. Water is not available for out of

stream uses where further reducing the flow level of surface water would be detrimental to existing fishery resources.

- Ecology may deny an application for a new appropriation in a drainage where adjudicated rights exceed the average low flow supply, even if the prior rights are not presently being exercised. Water would not become available for appropriation until existing rights are relinquished for non-use by state proceedings.

Water in the Fisher Creek sub-basin is not legally available for new consumptive uses in the absence of approved mitigation measures. However, given that water will be added to the Fisher Creek sub-basin under the conditions of the mitigation plan, as modified by Ecology and agreed to by the Tribe and the applicant, there will be a net benefit to the Fisher Creek sub-basin. A significant proportion of the water will come from the Stillaguamish Basin which will be delivered into the Fisher Creek sub-basin via septic recharge. Water Resource Inventory Area (WRIA) 5 – Stillaguamish River basin has a reservation system for permit-exempt domestic wells (WAC 173-505-090) which accounts for water use at a rate of 350 gallons per day (gpd) and limits outdoor water use to the watering of 1/12 acre for domestic exempt wells. Reservation water is still available in the Stillaguamish River basin. The 350 gpd can be reduced to 175 gpd if the residence is served by an on-site septic system located within the same WRIA. However, in this situation the water will be transported into the adjacent WRIA. Therefore, the Stillaguamish domestic reservation shall be debited 350 gpd on approval of this water right. The maximum potential negative impact to groundwater/surface water in the Stillaguamish Basin is 350 gpd per well, which is equal to a maximum annual total of 0.39 acre-feet per year (ac-ft/yr). See Attachment 4, *Hydrogeologic Assessment and Mitigation Plan Sun Peaks Estates, Snohomish County*, prepared by Associated Earth Sciences, Inc., dated October 30, 2012.

### **Potential for Impairment**

Impairment is an adverse impact on the physical availability of water for a beneficial use that is entitled to protection. A water right application may not be approved if it would:

- Interrupt or interfere with the availability of water to an adequately constructed groundwater withdrawal facility of an existing right. An adequately constructed groundwater withdrawal facility is one that (a) is constructed in compliance with well construction requirements and (b) fully penetrates the saturated zone of an aquifer or withdraws water from a reasonable and feasible pumping lift.
- Interrupt or interfere with the availability of water at the authorized point of diversion of a surface water right. A surface water right conditioned with instream flows may be impaired if a proposed use or change would cause the flow of the stream to fall to or below the instream flow more frequently or for a longer duration than was previously the case.
- Interrupt or interfere with the flow of water allocated by rule, water rights, or court decree to instream flows.
- Degrade the water quality of the source to the point that the water is unsuitable for beneficial use by existing users (e.g., via sea water intrusion).

Once the well is deepened, this applicant's well will be completed in the Sedimentary Aquifer and will withdraw water hydraulically connected to both the Stillaguamish Basin and the Fisher sub-basin. This will provide more groundwater recharge to the Fisher Creek sub-basin than withdrawn from it by virtue of septic return flows mentioned above as long as the applicant and the applicant's successors-in-interest comply with Ecology's modifications of the applicant's mitigation plan as set forth in the provisions above and as agreed to by the Tribe and the applicant. This will ensure non-impairment of instream flows in the Skagit Basin.

RCW 90.44.055 provides for water resource management techniques to increase water supply via recharge of groundwater as a means of making water available or otherwise offsetting the impact of a withdrawal of groundwater proposed in an application for water right. The increase of groundwater recharge in the Fisher Creek sub-basin will ensure that there is no reduction in water flowing from the Fisher sub-basin into the Skagit Basin. There will also be no impairment in the Stillaguamish Basin since water will be debited 350 gpd from the Stillaguamish domestic reservation, as discussed above.

#### **Public Welfare**

There will be no detriment to the public interest or welfare, because water from the Stillaguamish Basin domestic reservation will be tapped and debited, and septic recharge in the Fisher Creek sub-basin will ensure that flows will not be reduced in the Skagit Basin. This will ensure that there will be no negative impacts on the public interest and welfare including instream values, and fish populations.

#### *Consideration of Protests and Comments*

In response to public notice of this application, the Department of Ecology received no protests regarding this application for groundwater.

#### **CONCLUSIONS**


The conclusions based on the above investigation are as follows:

1. The proposed appropriation for single domestic use is a beneficial use of water;
2. The requested 10 gpm and 0.39 acre-feet per year is available for appropriation;
3. The new appropriation will not impair senior water rights; and
4. The new appropriation will not be detrimental to the public welfare.


#### **RECOMMENDATION**

Based on the information presented above, the authors recommend that the request to appropriate groundwater be approved in the amounts described, limited, and provisioned on page 2 through 4 of this report.

Report by:

  
Jerry Liszak, L.G., L.HG. - Water Resources Program

1/15/2014  
Date

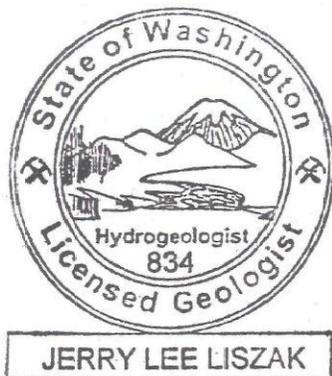

If you need this publication in an alternate format, please call Water Resources Program at 360 407-6600. Persons with hearing loss can call 711 for Washington Relay Service. Persons with a speech disability can call 877-833-6341.

## REFERENCES

AESI, 2012, *Hydrogeologic Assessment and Mitigation Plan Sun Peak Estates, Snohomish County, Washington*, Charles Lindsay, Associated Earth Scientists, Inc., October 30, 2012

EES, 2002. *Skagit River Basin; Return Flows to Aquifer- Exempt Wells*. Draft Memorandum, Dave Moldal, Economic and Engineering Services, Inc. Olympia, Washington. December 10, 2002

Johnson, K.H., and Savoca, M.E., 2010, *Numerical simulation of the groundwater-flow system in tributary subbasins and vicinity, lower Skagit River basin, Skagit and Snohomish Counties, Washington*: U.S. Geological Survey Scientific Investigations Report 2010-5184, 78 p.

Keta Waters, 2012, *Review of "Hydrogeologic Assessment. Sun Peak Estates. Snohomish County, Washington" prepared by Associated Earth Scientists, Inc., October 30, 2012.*

Memorandum, Joel Massmann, March 1, 2013


Liszak, J.L., April 23, 2013, *Sun Peak Estates Water Balance for 1/12<sup>th</sup> acre irrigation*

PGG, 2002. *City of Sequim 2001 Hydrologic Monitoring Report, Clallam County,*

*Washington*, prepared by the Pacific Groundwater Group for City of Sequim, May 16, 2002.

Savoca, M.E., Johnson, K.H., Sumioka, S.S., Olsen, T.D., Fasser, E.T., and Huffinan, R.L., 2009. *Hydrogeologic framework, groundwater movement, and water budget in tributary subbasins and vicinity, lower Skagit River basin, Skagit and Snohomish Counties, Washington*: U.S. Geological Survey Scientific Investigations Report 2009-5270, 46 p.

Water Right Number G1-28760  
 Section 2 T32N R04E W.M.  
 WRIA 3 - Snohomish County

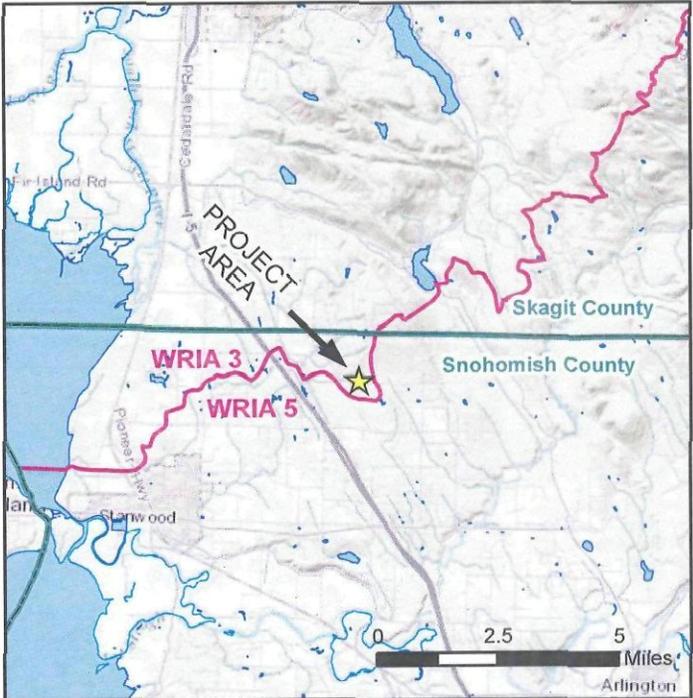

ATTACHMENT 1

**Legend**

-  Lot 10 of The Plat of Sun Peak Estates
-  County Boundary
-  Water Body
-  Parcels
-  Townships
-  Sections
-  WRIA



Map Date: 1/15/2014



## Attachment 2

### Lot 10 (Parcel 01075700001000)

Lot 10 of the Plat of Sun Peak Estates being a rural cluster sub division Township 32 North, Range 4 East, SW ¼ SE ¼ of section 2, Willamette Meridian, Auditor's File No. 200706065234 situated within Snohomish County, Washington. Described as follows:

Beginning at the S ¼ corner of Section 2, Township 32 North, Range 4 East, W.M., thence N 01°47'35" W along North-South center section line 687.25 ft, Thence N 75°04'09 E 51.34 ft to the true point of beginning, thence S 73°11'35" E 49.96 ft, thence S 60°10'15" E 125.34 ft, thence S 3°45'50" E 207.7 ft, Thence S 8°01'32" E 25.34 ft, thence S 88°12'25" W 163.98 ft, thence N 1°47'35" W 314.43 ft to the true point of beginning.

Also that tract of land described as follows: Beginning at the S ¼ corner of Section 2, Township 32 North, Range 4 East, W.M., thence N 1°47'35" W along North-South center section line 30.17 ft, thence S 85°44'53" E parallel to South section line 171.04 ft, thence along a curve to the left having a central angle of 90°00'00", a radius of 25 ft, and an arc length of 39.27 ft, then N 4°15'07" E 24.27 ft, thence along a curve to the right having a central angle of 51°58'06", a radius of 325 ft, and an arc length of 294.78 ft to the true point of beginning, thence continuing along said curve to the right 22.74 ft, thence N 60°09'08" W 187.51 ft, thence S 8°01'32" E 25.34 ft, thence S 60°09'08" E 161.15 ft to the true point of beginning.

# Associated Earth Sciences, Inc.



## Attachment 3 & 4

*Serving the Pacific Northwest Since 1981*

October 30, 2012  
Project No. EH110368A

Mr. Zachary J. Barborinas  
15119 McLean Road  
Mount Vernon, Washington 98273

Mr. Peter Ojala  
Carson Law Group P.S.  
3202 Hoyt Avenue  
Everett, Washington 98201-4311

Subject: **FINAL REPORT**  
Hydrogeologic Assessment and Mitigation Plan  
Sun Peaks Estates  
Snohomish County, Washington

### INTRODUCTION AND BACKGROUND

This report summarizes the results of a hydrogeologic assessment completed by Associated Earth Sciences, Inc. (AESI) in support of a mitigation plan for selected lots in the Sun Peaks Estates, which is situated in the Fisher Creek subbasin of Skagit/Snohomish Counties. The general location of the Sun Peaks Estates is shown on the "Location Map," Figure 1. The layout of the site is shown on the Plat Map, Figure 2.

Sun Peaks Estates is roughly 40-acres of property that includes 12 residential lots located just north of 316<sup>th</sup> Street NW and approximately 1,300 feet east of English Grade Road in northwest Snohomish County. The ground surface of the property generally slopes downward to the southwest and ranges in elevation between roughly 600 feet and 680 feet above mean sea level. A small seasonal tributary to Fisher Creek bisects the site in an approximate east-west direction (Figure 2). All elevations referenced in this report are relative to mean sea level (datum NAVD88) unless otherwise noted.

The Sun Peaks Estates is comprised of 12 residential lots (Figure 2). However, a single home has been built on Lots 5 and 6; therefore, there are a total of 11 buildable lots at the site. Individual single-family domestic wells have been drilled on each of the original residential lots. There are currently occupied homes located on Lot 1, Lots 5/6, Lot 8, and Lot 12.

The Fisher-Carpenter Creek subbasins were closed in 2010 to the drilling of single-family domestic wells under the Skagit Instream Flow Rule amendments reservation system adopted by

the Washington State Department of Ecology (Ecology) in 2006, unless the well's potential impact to surface water flow in either Fisher Creek or Carpenter Creek is mitigated. The 2006 Skagit Instream Flow Rule amendments reservation system established the maximum total daily individual residential water use at 350 gallons per day (gpd) with outdoor water use being limited to the watering of an outdoor area not to exceed a total of ½acre. Of the 350 gpd total residential use, 175 gpd is assumed to be septic return flow, and the remaining 175 gpd is consumptive use.

Due to the closure of the Fisher Creek subbasin, the owners of seven of the Sun Peaks Estates lots (Lots 2, 3, 4, 7, 9, 10, and 11, Figure 2) are currently being denied the use of their wells for single-family residential purposes (domestic exempt) by Ecology under the assumption the wells intercept ground water that provides recharge to Fisher Creek and that their use results in a negative impact to and a diminishment of flow in the stream. These seven property owners are currently appellants (referred to herein as "appellants") in an appeal before the Pollution Control Hearings Board over the closure of the subbasin, and other related issues. The remaining wells on Lots 1, 5, 6, 8, and 12 were installed and put to beneficial use prior to 2010 and are not subject to the current subbasin closure.

The purpose of our services was to evaluate the hydrogeology of the Sun Peaks Estates area, evaluate potential impacts to source water, and to ascertain if the use of the appellants' wells will result in a negative impact to or a diminishment of a source or flow in Fisher Creek or if mitigation is an option.

## GEOLOGIC AND HYDROGEOLOGIC SETTING

### General

The U.S. Geological Survey (USGS) recently completed a comprehensive and detailed geologic/hydrogeologic evaluation of the lower Skagit River basin, including the Fisher and Carpenter Creek subbasins, for the Skagit County Public Works Department (Skagit County), Skagit County Public Utility District No. 1 (District), and Ecology. Details of the USGS study are presented in Scientific Investigations Report (SIR) 2009-5270 titled *Hydrogeologic Framework, Groundwater Movement, and Water Budget in Tributary Subbasins and Vicinity, Lower Skagit River Basin, Skagit and Snohomish Counties, Washington*. The USGS also developed a detailed numerical ground water flow model of a large portion of the lower Skagit River drainage, including Carpenter and Fisher Creek subbasins. Details of the USGS ground water flow model are presented in SIR 2010-5184 titled *Numerical Simulation of the Groundwater-Flow System in Tributary Subbasins and Vicinity, Lower Skagit River Basin, Skagit and Snohomish Counties, Washington*.

The following is a summary of the regional geologic/hydrogeologic setting of the area in the immediate vicinity of the Sun Peaks Estates, as presented in the above-referenced USGS reports. Pertinent geologic and hydrogeologic details of the area in the vicinity of the Sun Peaks Estates, including contours of ground water elevations in the bedrock aquifer that underlies the project site, are also shown on Figure 1. A generalized geologic cross section of the Sun Peaks Estates site, based on subsurface conditions presented on water well reports for the on-site wells and the in-field generated data, is presented on the "Geologic Cross Section A – A'," Figure 3.

- The ground surface at the Sun Peaks Estates and in the immediate surrounding area is covered by a layer of low-permeability glacial till sediments that are underlain at a relatively shallow depth by Chuckanut Formation bedrock.
- The glacial till sediments appear to be a few tens of feet thick in the vicinity of the site and generally consist of various amounts of clay, silt, sand, gravel, cobbles, and boulders. The till sediments are dense, have a low permeability, and are considered to act as a confining unit, not an aquifer, by the USGS (SIR 2009-5270).
- The Chuckanut Formation consists of alternating intervals of coarse-grained (sandstone and minor conglomerate) and fine-grained (mudstone, fine-grained sandstone, and siltstone) deposits. The USGS reports indicate that fractured/permeable portions of the Chuckanut Formation form a "Sedimentary Aquifer (OEc)."
- The Sedimentary Aquifer present within the fractured/permeable portions of the Chuckanut Formation deposits underlies the Sun Peaks Estates. The aquifer is unconfined where it crops out and can be confined in areas where it is fully saturated and covered by glacial sediments. Also fine-grained bedrock intervals within the Sedimentary Aquifer may produce local confined conditions.
- The USGS field-located 10 wells completed within the Sedimentary Aquifer located within roughly 3 miles of the Sun Peaks Estates site, determined their approximate ground surface elevations using Light Detection and Ranging (LiDAR) information, and field-measured depths to water in the wells on several occasions (SIR 2009-5270). Copies of water well reports for the 10 field-located USGS wells are included in Attachment A.
- The ground water elevation data obtained from the USGS wells was used to develop contours of ground water elevations in the Sedimentary Aquifer, as shown on Figure 1. The USGS regional ground water data indicates the following:
  - i. The regional ground water flow direction in the Sedimentary Aquifer beneath the

Sun Peaks Estates site is to the south towards the Stillaguamish River basin (Figure 1).

- ii. The depth to ground water in the USGS monitored wells ranged from approximately 24 feet to over 140 feet below the ground surface (Attachment A). All depths referenced in this report are relative to ground surface unless otherwise noted.
- iii. Ground water in the Sedimentary Aquifer is at an elevation of roughly 500 feet above mean sea level beneath the Sun Peaks Estates (Figure 1, SIR 2009-5270).

### Site-Specific Geology and Hydrogeology

The 12 domestic wells drilled at Sun Peaks Estates range in depth from 42 feet to 425 feet and are completed within fractured, water-bearing sedimentary bedrock. A representative of AESI and John Rose of Ecology field-located and measured the depths to ground water in 11 of the 12 on-site wells on August 3, 2012. They were unable to locate the well on Lot 10 during their August 3 site activities. The specific location of each wellhead was determined using a hand-held near-survey grade Trimble GeoXT GPS with a hurricane antenna provided by Ecology. The depths to water were measured using an Olympic well probe model 500. A representative of AESI returned to the site on August 8 and field-located the well on Lot 10. The depth to ground water in the Lot 10 well was measured using a Waterline well probe and the approximate location of the wellhead was determined using a hand-held Garmin GPS unit and a review of historical aerial photographs.

The ground surface elevation at each wellhead was determined from LiDAR elevation information (Snohomish County 2003 flight) and the field-generated GPS location data. The ground surface elevation, measured casing stickup, and depth to ground water data were used to estimate the elevation of ground water in each well. A summary of well construction, location, and water level details for the on-site wells is presented in Table 1. Copies of the water well reports for each well is included in Attachment A. The approximate location of each well at the Sun Peaks Estates site is shown on Figure 2.

The wells completed at the Sun Peaks Estates site all appear to have encountered roughly 25 feet (Lot 11) to 80 feet (Lot 9) of relatively dense, low-permeability glacial till overlying sedimentary bedrock (Attachment A, Figure 3). Ground water was not indicated as being encountered in the overlying glacial till sediments at the site by the water well drillers (Attachment A). The bedrock consists of a fine-grained upper sediment package that extended to depths of roughly 120 feet to 170 feet and was described as consisting of fine-grained sandstone, shale, and siltstone (Attachment A, Figure 3). The upper bedrock unit is underlain by what was typically described as gray coarse sandstone with minor layers of shale, siltstone,

and fine-grained sandstone, which is referred to as the lower bedrock unit for the purposes of this report (Attachment A, Figure 3). The on-site wells were constructed with 6-inch-diameter steel casing that was extended through the glacial till sediments and a minimum of 3 feet into the top of the underlying bedrock with the exception of the Lot 1 well, where the 6-inch casing only penetrated the bedrock approximately 1 foot (Attachment A). PVC liners (4.5- to 5.0-inch-diameter) were installed to the completion depths of the wells located on Lots 3 through 12 (Attachment A, Figure 3). The PVC liners were slotted to allow the entry of ground water through the open areas (Attachment A, Table 1). The wells installed on Lots 1 and 2 were completed as open-end casing without PVC liners.

Nine of the on-site wells (Lots 3, 4, 5, 6, 7, 8, 9, 11, and 12) appear to intercept water-bearing, fractured sandstone in the lower bedrock unit at depths of greater than 140 feet below the ground surface (Table 1, Figure 3). The depths to ground water in eight of the wells ranged between approximately 145 feet (Lot 3) and 177 feet (Lot 12), which correspond to a rough elevation range of 502 feet to 517 feet above mean sea level (Table 1, Figure 3). The ground water elevation measured in the well located on Lot 9 was approximately 580 feet above mean sea level (Table 1). With the exception of the Lot 9 well, the range of ground water elevations in the wells completed in the lower bedrock unit at the Sun Peaks Estates site correspond closely to the USGS estimated elevation of 500 feet for the Sedimentary Aquifer at the site (Figures 1 and 3, Table 1).

The wells on the remaining three lots (Lots 1, 2, and 10) appear to intercept localized shallow water-bearing fractures in the upper bedrock unit that begin at depths of roughly 40 to 60 feet (Table 1, Figure 3). The depth to ground water measured in the shallow wells in August 2012 ranged from less than 10 feet (Lot 2) to approximately 20 feet (Lot 10), which correspond to a range in elevation from roughly 641 feet to 622 feet above mean sea level (Table 1, Figure 3).

Yields from the on-site wells, as reported by the well drillers on the water well reports, range from approximately 1.5 gallons per minute (gpm) to 35 gpm and appear to be adequate for single-family domestic use (Attachment A). Reported yields for the three wells completed in the upper bedrock unit are an average of roughly 3.5 gpm. Yields from the wells completed in the lower bedrock unit are reported as an average of approximately 11 gpm (Attachment A).

**Table 1**  
**Summary of Well Location and Ground Water Elevation Data**  
**Sun Peaks Estates - Snohomish County**

Lot No.	Unique ID	Date	Owner	Time	Latitude <sup>1</sup>	Longitude <sup>1</sup>	Ground Elevation		Well Depth	Open Area	Casing Stickup	Depth to Water	Static Elevation <sup>3</sup>	Comments
							GPS <sup>1</sup>	LiDAR <sup>2</sup>						
1	BAT220	8/3/12	Yencich	15:25	48.282636	122.256164	639.99	647.08	48	46-48	1.17	15.42	632.83	House well - recent pumping
2	BAT494	8/3/12	Stonnell	15:15	48.282631	122.256028	642.45	648.06	42	41.5-42	1.33	8.67	640.72	
3	BAT493	8/3/12	Rosenberg	15:00	48.282621	122.255359	648.18	655.63	205	60-205	1.92	144.58	512.97	
4	BAT124	8/3/12	Barborinas	14:15	48.282557	122.253992	667.45	670.68	425	325-425	1.83	165.58	506.93	
5	BAT246	8/3/12	Burton	16:30	48.283683	122.253234	671.65	674.89	240	140-240	1.25	168.33	507.81	House well
6	BAT247	8/3/12	Burton	16:00	48.284099	122.254550	645.86	661.14	207	147-207	2.67	156.67	507.14	Irrigation well - recent pumping
7	BAT248	8/3/12	Halgren	17:30	48.284086	122.254642	671.43	660.24	226	155-226	2.75	146.08	516.91	
8	BAT229	8/3/12	Bennett	15:50	48.283866	122.255625	641.17	650.59	200	140-160	0.83	149.42	502.00	House well
9	BAT234	8/3/12	Bateman	15:35	48.283502	122.256587	644.02	650.33	200	140-200	1.50	72.50	579.33	
10	BAT466	8/8/12	Spanc <sup>4</sup>	18:00	48.284228	122.258039	--	639.59	80	40-80	1.70	19.62	621.67	
11	BAT492	8/3/12	Sundberg	17:00	48.285272	122.255883	676.99	679.19	223	160-223	3.00	176.50	505.69	
12	BAT491	8/3/12	Givens	17:20	48.285245	122.255573	678.22	681.64	276	170-176	0.92	175.50	507.06	House well

**Notes:**

<sup>1</sup> Latitude, longitude, and elevation determined using Ecology GPS unit on August 3, 2012, NAVD88 datum.

<sup>2</sup> LiDAR data from NW Snohomish County 2003 flight, NAVD88 datum.

<sup>3</sup> Ground water elevations based on LiDAR ground surface elevations plus field-measured casing stickup.

<sup>4</sup> Location determined using a hand-held GPS unit and check using Google Earth aerial photographs.

## DISCUSSION AND CONCLUSIONS

### General

The regional USGS study and site-specific data indicate that Sun Peaks Estates is underlain by what the USGS refers to as the Sedimentary Aquifer which is located within fractured portions of the Chuckanut Formation bedrock at depths greater than approximately 140 feet. The Sedimentary Aquifer is separated from the ground surface at the site by several 10s of feet of dense, low-permeability glacial till and/or un-fractured low-permeability bedrock. The site-specific data does not indicate that there are water-bearing zones in the glacial till or that the Sedimentary Aquifer is in hydraulic continuity with surface waters in the immediate vicinity of the site. This lack of hydraulic continuity is further demonstrated by the seasonal nature of the tributary stream that flows through the Sun Peaks Estates site. AESI's on-site observations and discussions with local landowners indicates that the seasonal stream channel which bisects the Sun Peaks Estates is generally dry (no surface water or ground water discharge/seepage) between roughly July and October of each year. As discussed below, ground water in the Sedimentary Aquifer immediately beneath Sun Peaks Estates does not appear to be a source of water to Fisher Creek or the Fisher-Carpenter Creek subbasin.

Nine of the on-site wells (Lots 3, 4, 5, 6, 7, 8, 9, 11, and 12), including five of the appellant wells (Lots 3, 4, 7, 9, and 11), are completed at depths greater than 140 feet and appear to be intercepting water from the regional Sedimentary Aquifer. The water level elevations in eight of these wells correspond very well with the ground water elevations in the regional Sedimentary Aquifer system described by the USGS (Figure 1, Table 1). The water level in the well located on Lot 9 is approximately 60 feet higher in elevation than the water levels in the other eight wells (Figure 3). It is possible that ground water from a higher fracture zone in the bedrock is migrating down the outside of the 6-inch-diameter steel casing and influencing the ground water level in this well. However, it should be noted that the ground water in the well on Lot 9 is hydraulically separated from the ground surface by over 70 feet of low-permeability bedrock and glacial till (Figure 3).

The data presented in the USGS reports indicate that the regional ground water flow direction in the Sedimentary Aquifer beneath the Sun Peaks Estates is toward the south. Therefore, removing ground water from the five wells (Lots 3, 4, 7, 9, and 11) completed in the Sedimentary Aquifer beneath the Sun Peaks Estates site at the relatively low rate of 350 gpd per well could ultimately cause a potential decrease in ground water throughflow to the Stillaguamish River basin; however, these withdrawals would not have a negative impact on ground water quantity or flow direction in the Fisher Creek subbasin, or result in a diminishment of surface water flow in Fisher Creek. The Sedimentary Aquifer beneath Sun Peaks Estates is not a source of water to Fisher Creek or the Fisher-Carpenter Creek subbasin.

There are three shallow on-site wells (Lots 1, 2, and 10), including two appellant wells (Lots 2 and 10), that appear to be intercepting relatively shallow localized, water-bearing fracture zones within the upper portion of the Chuckanut Formation. The shallow fracture system appears to be hydraulically separated from the ground surface by a few 10s of feet of low-permeability glacial till sediments. Water level information for the three shallow wells indicate confined conditions with static water levels near and, in one well (Lot 1), seasonally above the ground surface. The direction of ground water flow in the shallow fracture system cannot be determined based on the limited available data. Although the shallow fracture system appears to be hydraulically separated from surface water sources in the immediate vicinity of Sun Peaks Estates, it cannot be determined if a portion of the ground water flowing through the upper fracture system ultimately provides recharge to Fisher Creek. Furthermore, it cannot be determined without further study if withdrawals from the three shallow wells would negatively impact ground water flow within the Fisher-Carpenter Creek subbasin or diminish surface water flow in Fisher Creek.

## MITIGATION PLAN

### No Negative Net Impact from Sun Peaks Estates Appellant Wells

Five of the seven appellant wells (Lots 3, 4, 7, 9, and 11) will withdraw water from the Stillaguamish River basin, and ultimately provide ground water recharge to the Fisher-Carpenter Creek subbasin by virtue of their septic systems and possible outdoor uses. As only two of the seven appellant wells (Lots 2 and 10) could potentially decrease ground water recharge in the Fisher-Carpenter Creek subbasin, with the remaining five wells adding water to the subbasin, there is no overall potential negative net impact to ground water recharge/surface water flow in the Fisher Creek subbasin from the combined use of the appellant wells at the Sun Peaks Estates. The concept of no negative impact to or diminishment of ground water flow/surface water recharge in the Fisher-Carpenter Creek subbasin from the combined use of the seven appellant wells is discussed in detail below.

Five of the seven appellants (owners of Lots 3, 4, 7, 9, and 11) have wells that are completed in the deep regionally extensive Sedimentary Aquifer. These wells are intercepting ground water that provides recharge to the Stillaguamish River basin and do not appear to have hydraulic continuity with the Fisher-Carpenter Creek subbasin. Water Resource Inventory Area (WRIA) 5 – Stillaguamish River basin reservation system for permit-exempt domestic wells (WAC 173-505-090) accounts for water use at a rate of 350 gpd and limits outdoor water use to the watering of 1/12 acre for domestic exempt wells, as more particularly stated in the rule. The 350 gpd can be reduced to 175 gpd if the residence is served by an on-site septic system located in the same WRIA, which is not the case for the appellant's properties at Sun Peaks Estates. Therefore, the maximum potential negative impact to ground water recharge/surface water in the Stillaguamish River basin is 350 gpd per well, which is equal to an annual total of approximately 0.39 acre-feet (ac-ft) per well or a maximum of 1.95 ac-ft for the five wells.

Unmitigated reservation water is still available in the Stillaguamish River basin. Debit water for the total potential impact of 1.95 ac-ft per year from the use of the wells on Lots 3, 4, 7, 9, and 11 needs be accounted for in the Stillaguamish River reservation.

As previously discussed, the Stillaguamish River basin reservation system assumes that of the 350 gpd removed from a well, 175 gpd is returned to the hydrogeologic system as septic return flow. Therefore, the five wells located on Lots 3, 4, 7, 9, and 11 will be providing a total of 875 gpd (0.98 ac-ft per year) of additional ground water recharge to the Fisher-Carpenter Creek subbasin that was obtained from the Stillaguamish River basin.

Two of the seven appellant wells (Lots 2 and 10) are completed in relatively shallow localized fracture zones with depths to static water that are less than roughly 50 feet. Due to their shallow completion depths and the relatively shallow depth to ground water, the use of these wells, without drilling them deeper, has a slight potential to negatively impact ground water recharge in the Fisher-Carpenter Creek subbasin and diminish surface water flow in Fisher Creek. The maximum potential impact to ground and/or surface water in the Fisher-Carpenter Creek subbasin from the use of these wells is 175 gpd per lot, which is a total of 0.39 ac-ft per year.

In summary, the use of the wells completed on Lots 3, 4, 7, 9, and 11 will result in the import of an additional 0.98 ac-ft per year of ground water recharge from the Stillaguamish River basin to the Fisher-Carpenter Creek subbasin. The use of the wells on Lots 2 and 10 could result in a decrease in ground water recharge in the Fisher-Carpenter Creek subbasin a maximum of 0.39 ac-ft per year. Therefore, the combined impact resulting from the use of the seven appellant wells is a net positive increase in ground water recharge to the Fisher-Carpenter Creek subbasin of 0.59 ac-ft per year. The importation of water from the Stillaguamish River basin from Lots 3, 4, 7, 9, and 11 totally offsets the maximum potential impact from the use of the wells located on Lots 2 and 10.

Accordingly, consistent with WAC 173-505-060(1)(c) requirements of monitoring and reporting, Lots 3, 4, 7, 9 and 11 will comply with the necessary and lawful conditions stated in WAC 173-505-090(2), and Lots 2 and 10 will also install a metering device consistent with Lots 3, 4, 7, 9 and 11, for reporting and monitoring. Pursuant to WAC 173-503-060(1)(c), for reporting and quality assurance/control, the Lots will report their metered use annually to Ecology, and agree to keep septic recharge on the properties or its equivalent quantities.

### **Contingent Alternative Mitigation Plan**

If and only if the above mitigation plan is lawfully determined by Ecology to be inadequate, the following contingent alternative mitigation plan is proposed.

The potential negative impact to ground water recharge in the Fisher-Carpenter Creek subbasin due to the use of the shallow wells located on Lots 2 and 10, though already offset by a net positive impact from Sun Peak Estates as an entirety, could also be eliminated if the shallow wells on Lot 2 and 10 were deepened and completed within the Sedimentary Aquifer. Based upon the hydrogeological assessment, the use of the Lot 2 and 10 wells modified in this manner (deepened) would result in removing ground water from the Stillaguamish River basin and would not result in any negative impact to ground water recharge in the Fisher-Carpenter Creek subbasin or a diminishment of flow in Fisher Creek, offset or otherwise.

Therefore, a proposed contingent alternative mitigation plan is as follows:

1. Remove the PVC liners installed in the wells located on Lots 2 and 10.
2. Drill the wells to depths greater than roughly 140 feet.
3. Confirm that the static water level elevations in the deepened wells are in the range of approximately 500 to 520 feet indicating that the wells are intercepting the regional Sedimentary Aquifer.
4. Install a new PVC liner in each well that is slotted in a manner which allows water from the deep Sedimentary Aquifer to enter the well.
5. Each owner of the deepened wells on Lot 2 and 10, in addition to the owners of Lots 3, 4, 7, 9 and 11, will also comply with the necessary and lawful conditions stated in WAC 173-505-090(2).

### LIMITATIONS

We have prepared this report for the use of the identified seven appellants in regard to the use of single-family domestic wells at the Sun Peaks Estates in Snohomish County. The conclusions and interpretations presented in this report should not be construed as a warranty of the subsurface conditions. Our conclusions and recommendations are based on our review of the information described in this report and our interpretation of best available science at the time of this reports preparation. Our experience has shown that soil and ground water conditions can vary significantly over small distances.

Within the limitations of scope, schedule, and budget, AESI attempted to execute these services in accordance with generally accepted professional principles in the field of hydrogeology at the time this report was prepared. No warranty, express or implied, is made.

We have enjoyed working with you and are confident that these recommendations will aid in the successful completion of your project. If you should have any questions or require further assistance, please do not hesitate to call.


Sincerely,  
**ASSOCIATED EARTH SCIENCES, INC.**  
Everett, Washington



Charles S. Lindsay

Charles S. Lindsay, L.G., L.E.G., L.Hg.  
Senior Principal Geologist/Hydrogeologist

Attachments: Figure 1: Location Map  
Figure 2: Plat Map  
Figure 3: Geologic Cross Section A – A'  
Attachment A: Water Well Reports

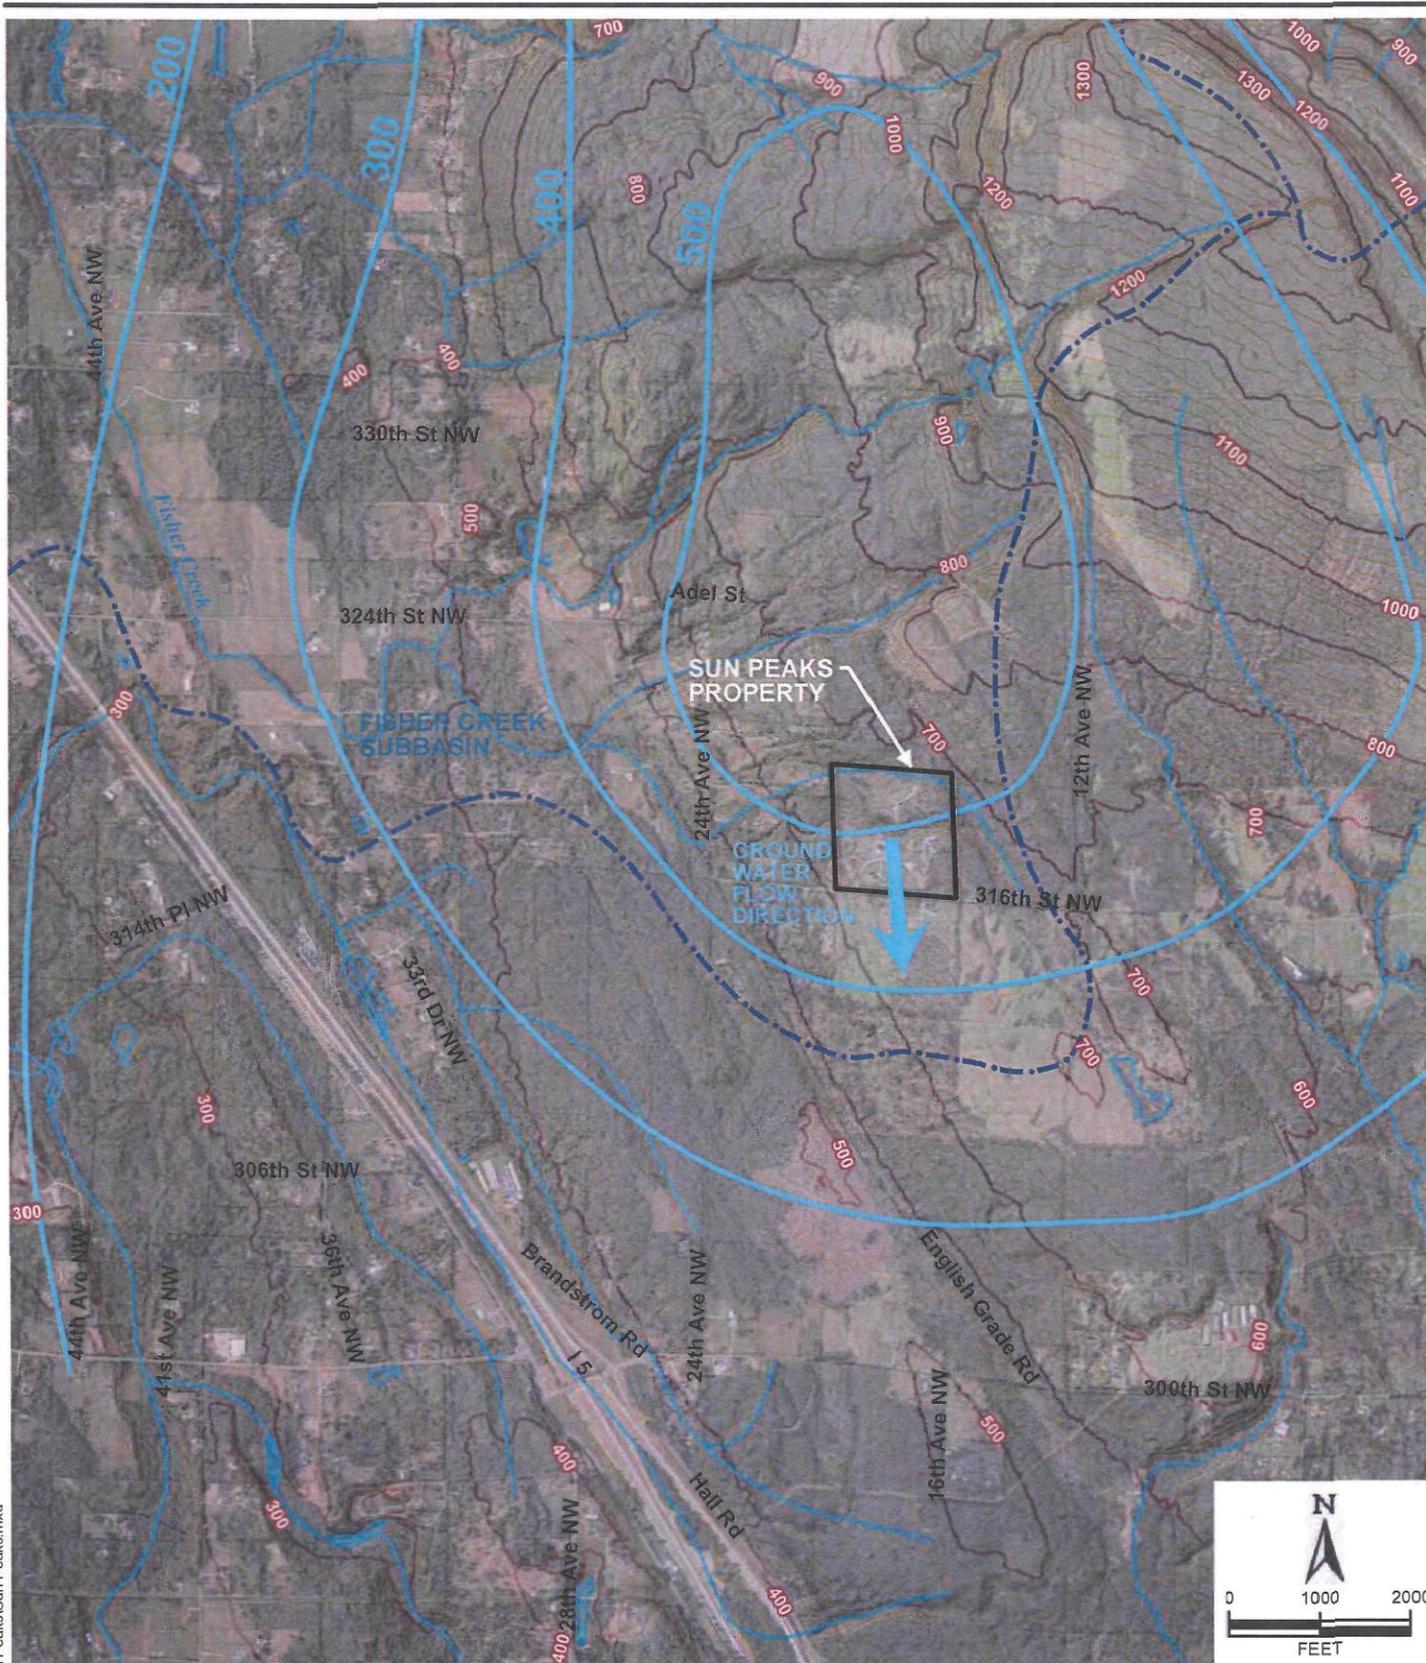

REFERENCE: USGS, SNOHOMISH COUNTY

NOTE: BLACK AND WHITE REPRODUCTION OF THIS COLOR ORIGINAL MAY REDUCE ITS EFFECTIVENESS AND LEAD TO INCORRECT INTERPRETATION.

Associated Earth Sciences, Inc.


LOCATION MAP  
SUN PEAKS ESTATES  
SNOHOMISH COUNTY, WASHINGTON

FIGURE 1

DATE 07/12

PROJ. NO. EH110368A



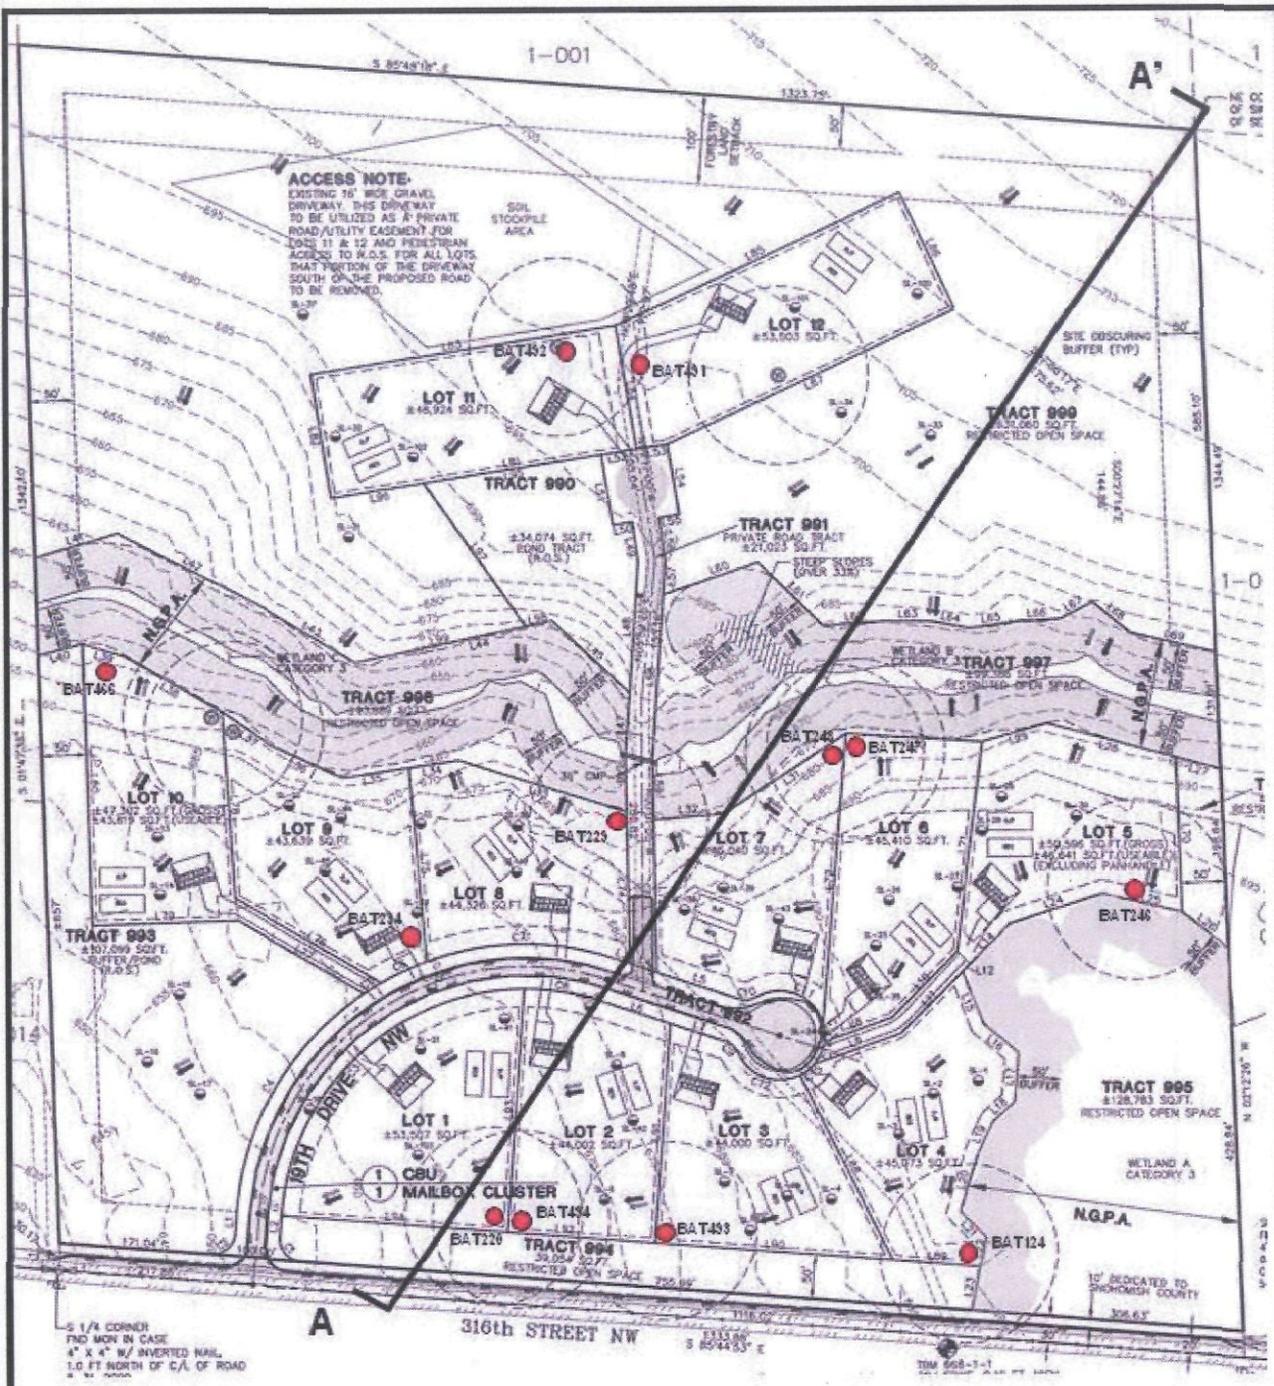


**ACCESS NOTE**  
 EXISTING 16' WIDE GRAVEL DRIVEWAY THIS DRIVEWAY TO BE UTILIZED AS A PRIVATE ROAD/UTILITY EASEMENT FOR LOTS 11 & 12 AND PEDESTRIAN ACCESS TO N.O.S. FOR ALL LOTS THAT PORTION OF THE DRIVEWAY SOUTH OF THE PROPOSED ROAD TO BE REMOVED.

5 1/4" CORNER  
 FND MON IN CASE  
 4" X 4" W/ INVERTED NAIL  
 1.0 FT NORTH OF C/L OF ROAD


● Field located Well - August 3 and 8, 2012  
 BAT453

**North**  
 ↑



Reference: Cascade Surveying & Engineering, Inc. Sun Peaks Estates Drawing Dated 08/05

<p>Associated Earth Sciences, Inc.</p>	<p><b>PLAT MAP</b>  <b>SUN PEAKS ESTATES</b>  <b>SNOHOMSH COUNTY, WASHINGTON</b></p>	<p><b>FIGURE 2</b>  <b>DATE 8/12</b>  <b>PROJ. I.I.O. EH10368A</b></p>
--	--	--

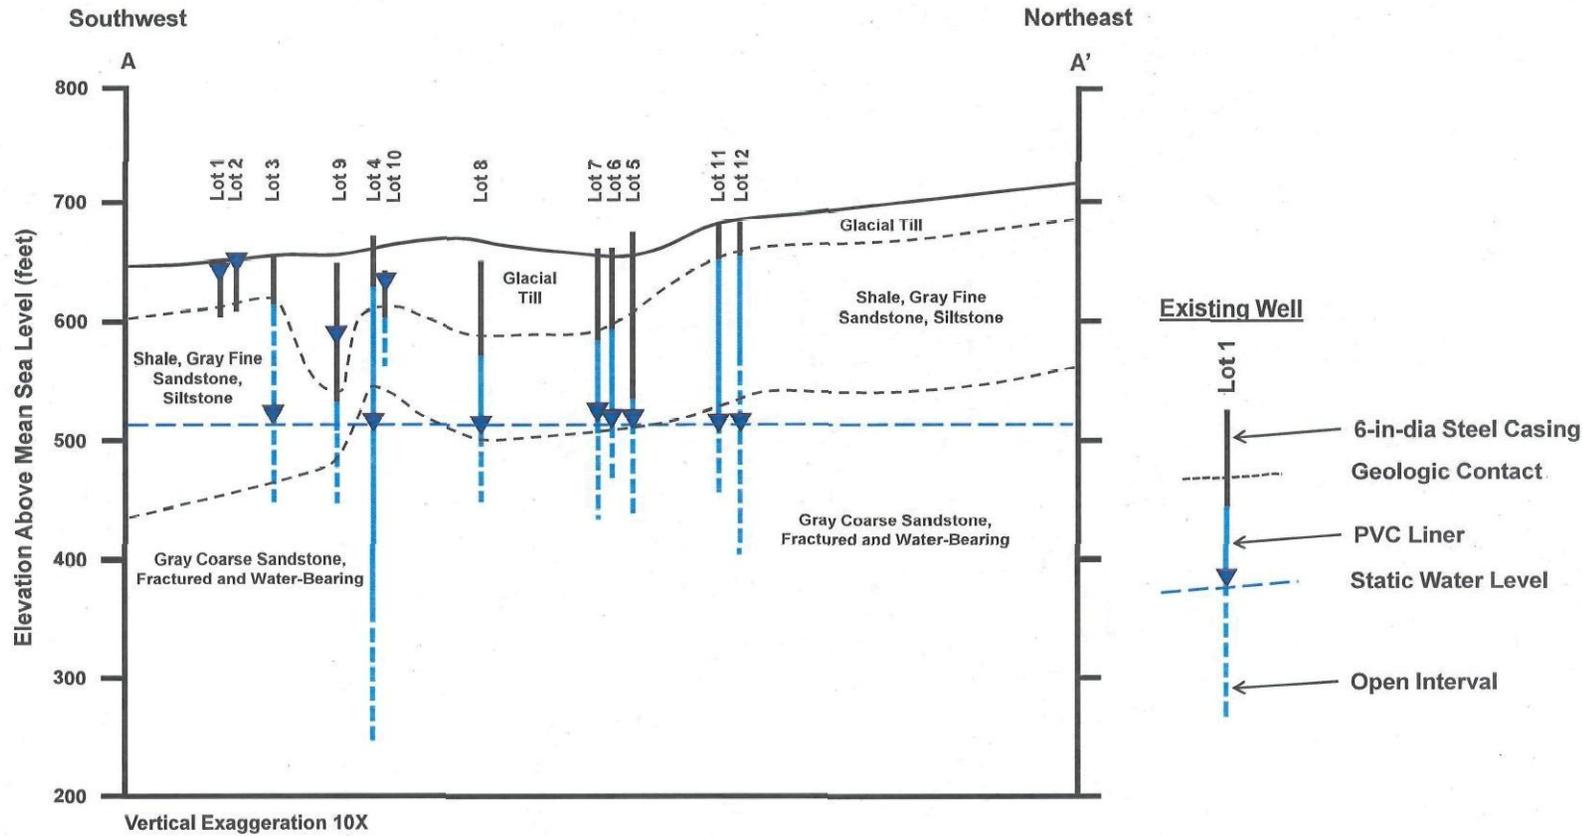

Associated Earth Sciences, Inc.



**GEOLOGIC CROSS SECTION A - A'**  
 SUN PEAKS ESTATES  
 SNOHOMISH COUNTY, WASHINGTON

**FIGURE 3**  
 DATE 8/12  
 PROJ. NO. EH110368A

# **ATTACHMENT A**

## **Water Well Reports**







# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

Construction/Decommission ("x" in circle)

Construction

Decommission ORIGINAL INSTALLATION Notice of Intent Number \_\_\_\_\_

Rosenborgs Lot 3 W260499

CURRENT Notice of Intent No. W 208922

Unique Ecology Well ID Tag No. B-493

Water Right Permit No. \_\_\_\_\_

Property Owner Name Kevin Sundberg

Well Street Address 203 19th Ave NW

City Stanwood County Snohomish

Location SE 1/4-1/4 NE 1/4 Sec 2 Twn 32R 4E circle one WWM

Lat/Long (s, l, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_

Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_

Tax Parcel No. 010 757 006 003 00

PROPOSED USE:  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other \_\_\_\_\_

TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dug  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

DIMENSIONS: Diameter of well 6 inches, drilled 205 ft.  
Depth of completed well 205 ft.

CONSTRUCTION DETAILS  
Casing  Welded 6" Diam. from +2 ft to 43 ft.  
Installed:  Liner installed 45" Diam. from -4 ft to 205 ft.  
 Threaded \_\_\_\_\_ Diam. from \_\_\_\_\_ ft to \_\_\_\_\_ ft.

Perforations:  Yes  No  
Type of perforator used saw  
SIZE of perfs 3/16 in. by 4 in. and no. of perfs 200 from 60 ft to 205

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
Manufacturer's Name \_\_\_\_\_  
Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft to \_\_\_\_\_ ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
Materials placed from \_\_\_\_\_ ft to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 18 ft.  
Material used in seal Bentinite chips  
Did any strata contain unusable water?  Yes  No  
Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name \_\_\_\_\_ NO  
Type: \_\_\_\_\_ H.P.

WATER LEVELS: Land surface elevation above mean sea level \_\_\_\_\_ ft.  
Static level 61 ft. below top of well Date 12900  
Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom? \_\_\_\_\_  
Yield: 180 gal/min. with 140 ft. drawdown after 1 hrs. KPa test  
Yield: 90 gal/min. with 70 ft. drawdown after 1 hrs.  
Yield: 90 gal/min. with 70 ft. drawdown after 1 hrs.  
Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level):  
Time Water Level Time Water Level Time Water Level  
\_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_  
\_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_  
\_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_ \_\_\_\_\_  
Date of test \_\_\_\_\_  
Bailer test 1.5 gal/min. with 144 ft. drawdown after 3 hrs.  
Airtest \_\_\_\_\_ gal/min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
Artesian flow \_\_\_\_\_ g.p.m. Date 12910  
Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

### CONSTRUCTION OR DECOMMISSION PROCEDURE

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
Black buff silty	0	2
<del>conglomerant</del>	2	14
Rock silt clay		
gray conglomerant	14	36
gray fine sandstone	36	130
Hard pan gray	130	150
gray fine sandstone	150	203
light brown shale	203	205

Start Date 11910 Completed Date 113110

WELL CONSTRUCTION CERTIFICATION: I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller/Engineer/Trainee Name (Print) David Rutledge  
Driller/Engineer/Trainee Signature \_\_\_\_\_  
Driller or trainee License No. 1297

Drilling Company A2 Drilling and Digging  
Address PO Box 120  
City, State, Zip Stanwood

If TRAINEE, Driller's Licensed No. \_\_\_\_\_  
Driller's Signature \_\_\_\_\_

Contractor's Registration No. A2 D11194RFE Date 2 24 10

Ecology is an Equal Opportunity Employer.





The Department of Ecology does NOT warrant the Data and/or the Information on this Well Report.



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

Construction/Decommission ("x" in circle)

Construction

Decommission ORIGINAL INSTALLATION Notice of Intent Number \_\_\_\_\_

329918

32-4E-2H

CURRENT

Notice of Intent No. W252168

Unique Ecology Well ID Tag No. Bat 257

Water Right Permit No. \_\_\_\_\_

Property Owner Name SunPeak Est

Well Street Address Route 31826 19<sup>th</sup> Drive NW

City Stanwood County Shohomish

Location SE 1/4 - 1/4 NE 1/4 Sec 2 Twp 32 R4 EWN one  
or WWM one

Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_

Still **REQUIRED** Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_

Tax Parcel No. 320402 004 00300

PROPOSED USE:  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other \_\_\_\_\_

TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned  Deepened Method:  Dug  Bored  Driven  
 Cable  Rotary  Jetted

DIMENSIONS: Diameter of well 6 inches, drilled 207 ft.  
Depth of completed well 207 ft.

CONSTRUCTION DETAILS  
Casing  Welded  Diam. from 0 ft. to 69 ft.  
Installed:  Liner installed 4 1/2 " Diam. from -3 ft. to 207 ft.  
 Threaded  Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
Type of perforator used saw  
SIZE of perfs 3/16 in. by 4 in. and no. of perfs 20 from 147 to 207

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
Manufacturer's Name \_\_\_\_\_  
Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_ ft.  
Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 21 ft.  
Material used in seal Bentonite chips  
Did any strata contain unusable water?  Yes  No  
Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name Grundfos  
Type: SUB H.P. 1

WATER LEVELS: Land-surface elevation above mean sea level \_\_\_\_\_ ft.  
Static level 150 ft. below top of well Date 12208  
Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom? David  
Yield: 6 gal./min. with 40 ft. drawdown after 2.5 hrs.  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Recovery data (time taken at zero when pump turned off) (water level measured from well top to water level)

Time	Water Level	Time	Water Level	Time	Water Level
_____	_____	_____	_____	_____	_____

Date of test 12308  
Bailer test 10 gal./min. with 45 ft. drawdown after 1 hrs.  
Airtest \_\_\_\_\_ gal./min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

## CONSTRUCTION OR DECOMMISSION PROCEDURE

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
fill	72	
tan top soil sandy	0	3
tan conglomerate	3	141
gray conglomerate	15	55
gray fine sand stone	55	65
medium gray sand stone	65	87
fine gray sand stone	87	140
soft shale gray	140	145
gray shale #20	145	185
gray sand stone	185	207

Well produce 60 PPM  
at 5' 35' west  
produce 1.5 PPM  
  
well test 2.5 hr at 60 PPM  
at 5' drop 36"

RECEIVED  
DEC 15 2008  
DEPT. OF ECOLOGY

Start Date 9/10/08 Completed Date 12/20/08

WELL CONSTRUCTION CERTIFICATION: I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainee Name (Print) David A. Hildebrand  
Driller/Engineer/Trainee Signature \_\_\_\_\_  
Driller or trainee License No. 1297

Drilling Company AJ Drilling and Digging  
Address Parish 1007  
City, State, Zip Stanwood

IF TRAINEE:  
Driller's Licensed No. \_\_\_\_\_  
Driller's Signature \_\_\_\_\_

Contractor's  
Registration No. AJ Drilling and Digging Date 12/20/08  
Ecology is an Equal Opportunity Employer.



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

Construction/Decommission ("x" in circle)

Construction

Decommission ORIGINAL INSTALLATION Notice of Intent Number \_\_\_\_\_

Hatsren Lot 7

CURRENT

Notice of Intent No. W252180

Unique Ecology Well ID Tag No. Box 248

Water Right Permit No. \_\_\_\_\_

Property Owner Name SUNPEAKS ESTATES

Well Street Address Lot 7 Sun Peaks 31812, 19 Drive

City Stanhope County Snohomish

Location SE 1/4-1/4 NE 1/4 Sec 2 Twn 32 R 4  EWN or  WWM circle one

Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_

Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_

Tax Parcel No. 320403 004 00300

PROPOSED USE:  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other

TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dug  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

DIMENSIONS: Diameter of well 6 inches, drilled 126 ft.  
Depth of completed well 126 ft.

CONSTRUCTION DETAILS  
Casing  Welded 6" Diam. from 0 ft. to 78 ft.  
Installed:  Liner installed 5" Diam. from -7 ft. to 226 ft.  
 Flanged 5" Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
Type of perforator used S&W  
SIZE of perfs 7/16 in. by 4 in. and no. of perfs 100 from 15 ft. to 226

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
Manufacturer's Name \_\_\_\_\_  
Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 20 ft.  
Material used in seal Bentinite chips  
Did any strata contain unusable water?  Yes  No  
Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name HO  
Type: \_\_\_\_\_ HP

WATER LEVELS: Land surface elevation above mean sea level \_\_\_\_\_ ft.  
Static level 155 ft. below top of well Date 10 7 08  
Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom? \_\_\_\_\_  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)  
Time \_\_\_\_\_ Water Level \_\_\_\_\_ Time \_\_\_\_\_ Water Level \_\_\_\_\_ Time \_\_\_\_\_ Water Level \_\_\_\_\_  
Date of test 10 6 08  
Bailer test 12 gal./min. with 70 ft. drawdown after 20 min.  
Airtest \_\_\_\_\_ gal./min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

### CONSTRUCTION OR DECOMMISSION PROCEDURE

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
tan top soil sandy	0	3
tan fill	3	14
gray fill	15	35
gray silty sand coarse	35	75
gray fine sandstone	75	150
gray coarse sandstone	150	160
gray fine sandstone	160	204
gray shale #20	204	207
gray sandstone	207	226
PUMP set at 207' at 1.5 gpm to slow gray floating silt		
recovery at 1.5 gpm		

WELL CONSTRUCTION CERTIFICATION: I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainee Name (Print) \_\_\_\_\_  
Driller/Engineer/Trainee Signature \_\_\_\_\_  
Driller or trainee License No. 1207

Drilling Company A1 Drilling and Digging  
Address 22813 60th Drive NW  
City, State, Zip Stanhope WA

IF TRAINEE  
Driller's Licensed No. \_\_\_\_\_  
Driller's Signature \_\_\_\_\_

Contractor's  
Registration No. A1DRI1942RE Date 10 07 08  
Ecology is an Equal Opportunity Employer.

The Department of Ecology does NOT Warranty the Data and/or the Information on this Well Report.

303141 Bennett Lot 8 32-46-2H



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

CONSTRUCTION/Decommission ("x" in circle)

- Construction
- Decommission ORIGINAL INSTALLATION Notice of Intent Number \_\_\_\_\_

## CURRENT

Notice of Intent No. W252181  
 Unique Ecology Well ID Tag No. Act 229  
 Water Right Permit No. \_\_\_\_\_  
 Property Owner Name Russ Bennett  
 Well Street Address 31720 16<sup>th</sup> Drive NW  
 City Stanwood County Shobomish  
 Location SE 1/4-1/4 URB Sec 2 Twn 32R4  
 Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_  
 Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_  
 Tax Parcel No. 01075700000800

**PROPOSED USE:**  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other

**TYPE OF WORK:** Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dug  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

**DIMENSIONS:** Diameter of well 6 inches, drilled 200 ft.  
 Depth of completed well 200 ft.

**CONSTRUCTION DETAILS**  
 Casing  Welded 6" Diam. from 0 ft. to 80 ft.  
 Installed:  Liner installed 5" Diam. from 20 ft. to 200 ft.  
 Threaded \_\_\_\_\_ Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
 Type of perforator used saw  
 SIZE of perfs 1/8 in. by 4 in. and no. of perfs 100 from 140 ft. to 200 ft.

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
 Manufacturer's Name \_\_\_\_\_  
 Type \_\_\_\_\_ Model No. \_\_\_\_\_  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_ ft.  
 Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 20 ft.  
 Material used in seal Ben tinoite chips  
 Did any strata contain unusable water?  Yes  No  
 Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
 Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name Force  
 Type: SUB H.P. 2

**WATER LEVELS:** Land-surface elevation above mean sea level \_\_\_\_\_ ft.  
 Static level 142 ft. below top of well Date 6/25/08  
 Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
 Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

**WELL TESTS:** Drawdown is amount water level is lowered below static level  
 Was a pump test made?  Yes  No If yes, by whom? DAVID  
 Yield: 5.5 gal/min. with 40 ft. drawdown after 22 hrs.  
 Yield: \_\_\_\_\_ gal/min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: 2 gal/min. with 5 ft. drawdown after 45 hrs.  
 Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)  
 Time Water Level Time Water Level Time Water Level  
11:50 148 4:40 153 4:30 150  
 Date of test 6/30/08  
 Bailor test 5 gal./min. with 40 ft. drawdown after 22 min.  
 Airtest \_\_\_\_\_ gal./min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
 Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
 Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

## CONSTRUCTION OR DECOMMISSION PROCEDURE

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
light tan to sandy	0	2
tan clay	2	10
tan till	10	14
gray conglomerate (till)	14	20
cemented coarse sand	20	67
tan soft shale	67	86
gray sandstone 7 in	86	155
gray coarse sandstone #20 2.5 gpm	155	167
gray fine sandstone	167	200

RECEIVED  
 JUL 22 2008  
 DEPT. OF ECOLOGY

Start Date 6/20/08 Completed Date 6/29/08

**WELL CONSTRUCTION CERTIFICATION:** I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainee Name (Print) David Guthrie  
 Driller/Engineer/Trainee Signature \_\_\_\_\_  
 Driller or trainee License No. 1297

IF TRAINEE,  
 Driller's Licensed No. \_\_\_\_\_  
 Driller's Signature \_\_\_\_\_

Drilling Company AJ Drilling and Digging Inc  
 Address 22813 16th Drive NW  
 City, State, Zip Stanwood WA  
 Contractor's Registration No. AJ Drilling Date 7/6/08  
 Ecology is an Equal Opportunity Employer.



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

Construction/Decommission ("x" in circle)

Construction

Decommission ORIGINAL INSTALLATION Notice of Intem Number \_\_\_\_\_

Bakeron 32-46-12H

### CURRENT

Notice of Intent No. W252182

Unique Ecology Well ID Tag No. Per 234

Water Right Permit No. \_\_\_\_\_ Art 9

Property Owner Name Jim Spaine

Well Street Address lot 9 31632 19<sup>th</sup> DRW

City Stanwood County Shohomish

Location: E14-1/4 N1/2A Sec 12 Twp 32R4 circle of WWM one

Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_

Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_

Tax Parcel No. 01075700000900

**PROPOSED USE:**  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other

**TYPE OF WORK:** Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dig  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

**DIMENSIONS:** Diameter of well 6 inches, drilled 200 ft.  
 Depth of completed well 200 ft.

**CONSTRUCTION DETAILS**  
 Casing installed:  Welded 6" Diam. from 0 ft. to 117 ft.  
 Liner installed 45" Diam. from -20 ft. to 200 ft.  
 Threaded \_\_\_\_\_ Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
 Type of perforator used 5/16" Pipe  
 SIZE of perfor 3/16 in. by 7 in. and no. of perfor 120 from 140 ft. to 200

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
 Manufacturer's Name \_\_\_\_\_  
 Type \_\_\_\_\_ Model No. \_\_\_\_\_  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 18 ft.  
 Material used in seal Bentinite chips  
 Did any strata contain unusable water?  Yes  No  
 Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
 Method of sealing strata off \_\_\_\_\_

**PUMP:** Manufacturer's Name Grundfos  
 Type: SUB H.P. 1/2

**WATER LEVELS:** Land surface elevation above mean sea level \_\_\_\_\_ ft.  
 Static level 140 ft. below top of well Date 72408  
 Artesian pressure \_\_\_\_\_ lbs. per square inch. Date \_\_\_\_\_  
 Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

**WELL TESTS:** Drawdown is amount water level is lowered below static level  
 Was a pump test made?  Yes  No If yes, by whom? Driller  
 Yield: 3 gal./min. with 22 ft. drawdown after 4 hrs.  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)  

Time	Water Level	Time	Water Level	Time	Water Level
<u>1100</u>	<u>162</u>	<u>1105</u>	<u>158</u>	<u>1300</u>	<u>150</u>

 Date of test 73008  
 Bailor test 5 gal./min. with 60 ft. drawdown after 1 hrs.  
 Airstest \_\_\_\_\_ gal./min. with screen set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
 Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
 Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

### CONSTRUCTION OR DECOMMISSION PROCEDURE

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
Black top soil	0	3
tan fill conglomerat	3	14
gray silty sand	14	70
gray fine silt	70	80
gray shale	80	120
sand stone fine	120	170
course gray sandstone	170	180
fine gray sandstone	180	200

H<sub>2</sub>O 170 fine 5 GPM  
cloudy and turbid  
3 GPM filterable  
Pail and Pump 2 works  
no change

RECEIVED

AUG 05 2008

DEPT. OF ECOLOGY

Start Date 63108 Completed Date 73108

**WELL CONSTRUCTION CERTIFICATION:** I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainer Name (Print) Dan Austine  
 Driller/Engineer/Trainer Signature \_\_\_\_\_  
 Driller or trainer License No. 1297  
 If TRAINER, Driller's Licensed No. \_\_\_\_\_  
 Driller's Signature \_\_\_\_\_

Drilling Company A1 Drilling and Digging Inc  
 Address PO Box 1207  
 City, State, Zip Stanwood  
 Contractor's Registration No. A1 Drilling 10566 E Date 73108  
 Ecology is an Equal Opportunity Employer.

The Department of Ecology does NOT warrant the Data and/or the Information on this Well Report.



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

337795

Spanglet 10

Construction/Decommission ("x" in circle)  
 Construction  
 Decommission ORIGINAL INSTALLATION Notice of Intent Number \_\_\_\_\_

CURRENT  
 Notice of Intent No. W268583  
 Unique Ecology Well ID Tag No. But 466  
 Water Right Permit No. 20410  
 Property Owner Name Jim Spanglet  
 Well Street Address 31628 19<sup>th</sup> DR NW  
 City Stanwood County Shoemish  
 Location SE 1/4-1/4 NW 1/4 Sec 2 Twn 32 R 4  circle one  
 Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_  
 Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_  
 Tax Parcel No. 010 757 000 010 00

**PROPOSED USE:**  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other \_\_\_\_\_

**TYPE OF WORK:** Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dug  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

**DIMENSIONS:** Diameter of well 6 inches, drilled 80 ft.  
 Depth of completed well 80 ft.

**CONSTRUCTION DETAILS**  
 Casing Installed:  Welded 6 Diam. from 0 ft. to 40 ft.  
 Lined 8 Diam. from 8 ft. to 80 ft.  
 Threaded \_\_\_\_\_ Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
 Type of perforator used SAW  
 SIZE OF PERFS 24 in. by 4 in. and no. of perfs 40 from 40 ft. to 80 ft.

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
 Manufacturer's Name \_\_\_\_\_  
 Type \_\_\_\_\_ Model No. \_\_\_\_\_  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
 Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 18 ft.  
 Material used in seal Bentinite chips  
 Did any strata contain unusable water?  Yes  No  
 Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
 Method of sealing strata off \_\_\_\_\_

**PUMP:** Manufacturer's Name Good  
 Type: SUB H.P. 1/2

**WATER LEVELS:** Land surface elevation above mean sea level \_\_\_\_\_ ft.  
 Static level 22 ft. below top of well Date: 3/24/09  
 Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
 Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

**WELL TESTS:** Drawdown is amount water level is lowered below static level  
 Was a pump test made?  Yes  No If yes, by whom? \_\_\_\_\_  
 Yield: 1.5 gal/min with 50 ft. drawdown after 24 hrs.  
 Yield: \_\_\_\_\_ gal/min with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: \_\_\_\_\_ gal/min with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)

Time	Water Level	Time	Water Level	Time	Water Level
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

Date of test \_\_\_\_\_  
 Bailor test \_\_\_\_\_ gal/min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Airtest \_\_\_\_\_ gal/min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
 Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
 Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

**CONSTRUCTION OR DECOMMISSION PROCEDURE**  
 Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
tan top soil	0	2
light tan conglomerate (ch 11)	2	18
gray till	18	34
gray sandstone zone	34	36
gray coarse sandstone	36	44
gray sandstone	44	80

**RECEIVED**  
 APR 29 2009  
 Dept of Ecology  
 WR-NWRO  
 Pump test 2100 gallon  
 in a 24 hr period

Start Date 3/10/09 Completed Date 3/24/09

**WELL CONSTRUCTION CERTIFICATION:** I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainee Name (Print) David Rutledge  
 Driller/Engineer/Trainee Signature [Signature]  
 Driller or trainee License No. 1297  
 Drilling Company AJ Drilling and Digging Inc  
 Address PO Box 1207  
 City, State, Zip Stanwood WA  
 Contractor's Registration No. AJDD1940AD Date 4/19/09  
 Driller's Licensed No. \_\_\_\_\_  
 Driller's Signature \_\_\_\_\_  
 Ecology is an Equal Opportunity Employer.



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

Construction/Decommission ("x" in circle)

Construction

Decommission ORIGINAL INSTALLATION Notice of Intent Number

Sundberg Lot 11

CURRENT

Notice of Intent No. W1268920

Unique Ecology Well ID Tag No. But 4192

Water Right Permit No. \_\_\_\_\_

Property Owner Name Kevin Sundberg

Well Street Address Lot 11 19<sup>th</sup> Drive NW

City Stanwood County Snohomish

Location S1/4-1/4 NE1/4 Sec 2 Twn 32 R 4 circle one

Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_

Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_

Tax Parcel No. 010757 000-011-00

PROPOSED USE:  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other

TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dug  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

DIMENSIONS: Diameter of well 6 inches, drilled 22 1/2  
Depth of completed well 223 + 2

CONSTRUCTION DETAILS  
Casing  Welded 6 Diam. from 2 1/2 ft. to 30 ft.  
Installed:  Liner installed 4 1/2 Diam. from -5 ft. to 223 ft.  
 Threaded Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
Type of perforator used saw

SIZE OF perfs 3/16 in. by 5 in. and no. of perfs 10 from 160 to 223

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
Manufacturer's Name \_\_\_\_\_

Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 19 ft.  
Material used in seal Bentonite chips

Did any strata contain unusable water?  Yes  No  
% of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_

Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name NO  
Type \_\_\_\_\_ HP \_\_\_\_\_

WATER LEVELS: Land-surface elevation above mean sea level \_\_\_\_\_ ft.  
Static level 175 ft. below top of well Date \_\_\_\_\_  
Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_ (cap. valve, etc.)

WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom? DAVID

Yield: 8 gal./min. with 35 ft. drawdown after 1 hrs.  
Yield: 8 gal./min. with 25 ft. drawdown after 1 hrs. →  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)

Time \_\_\_\_\_ Water Level \_\_\_\_\_ Time \_\_\_\_\_ Water Level \_\_\_\_\_ Time \_\_\_\_\_ Water Level \_\_\_\_\_

Date of test \_\_\_\_\_  
Bailer test 8 gal./min. with 35 ft. drawdown after 1 hrs.

Air test \_\_\_\_\_ gal./min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_

Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

## CONSTRUCTION OR DECOMMISSION PROCEDURE

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
Dark Brown Top Soil	0	12
light tan sand sit rocks	12	5
tan conglomerate firm	5	25
fine gray sandstone	25	40
coarse (brui) sandstone	40	42
fine brui sandstone	42	130
tan coarse "	130	150
fine brui	150	180
coarse brui	180	185
fine brui	185	223
18 2010		
1 hour in between bail test		
19 2010		
flow rate 2 to 2.5 gpm		
recovery rate 50% after 300 gallons		
after 300 gallons		
Start Date <u>1 18 2010</u>	Completed Date <u>1 20 2010</u>	

WELL CONSTRUCTION CERTIFICATION: I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainee Name (Print) David A. Rutledge  
Driller/Engineer/Trainee Signature \_\_\_\_\_  
Driller or trainee License No. 1297

Drilling Company A1 Drilling and Digging Inc  
Address PO Box 1207  
City, State, Zip Stanwood

If TRAINEE, Driller's Licensed No. \_\_\_\_\_  
Driller's Signature \_\_\_\_\_

Contractor's Registration No. A1DR1D1942RE Date 1 20 2010  
Ecology is an Equal Opportunity Employer.

The Department of Ecology does NOT Warranty the Data and/or the Information on this Well Report.



# WATER WELL REPORT

Original & 1<sup>st</sup> copy - Ecology, 2<sup>nd</sup> copy - owner, 3<sup>rd</sup> copy - driller

Construction/Decommission ("x" in circle)

Construction

Decommission ORIGINAL INSTALLATION Notice of Intent Number \_\_\_\_\_

371 709

**PROPOSED USE:**  Domestic  Industrial  Municipal  
 DeWater  Irrigation  Test Well  Other \_\_\_\_\_

**TYPE OF WORK:** Owner's number of well (if more than one) \_\_\_\_\_  
 New well  Reconditioned Method:  Dug  Bored  Driven  
 Deepened  Cable  Rotary  Jetted

**DIMENSIONS:** Diameter of well 6 inches, drilled 276 ft.  
 Depth of completed well 276 ft.

**CONSTRUCTION DETAILS**  
 Casing  Welded 6 Diam. from 41 ft. to 30 ft.  
 Installed:  Liner installed 422 Diam. from 10 ft. to 276 ft.  
 Threaded Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
 Type of perforator used saw  
 SIZE of perfs 3/16 in. by 4 in. and no. of perfs 102 from 170 ft. to 176

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
 Manufacturer's Name \_\_\_\_\_  
 Type \_\_\_\_\_ Model No. \_\_\_\_\_  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 19 ft.  
 Material used in seal Bentlonite  
 Did any strata contain unusable water?  Yes  No  
 Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
 Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name NO  
 Type: \_\_\_\_\_ H.P. \_\_\_\_\_

**WATER LEVELS:** Land-surface elevation above mean sea level \_\_\_\_\_ ft.  
 Static level 170 ft. below top of well Date 1 8 2010  
 Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
 Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

**WELL TESTS:** Drawdown is amount water level is lowered below static level  
 Was a pump test made?  Yes  No If yes, by whom? \_\_\_\_\_  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)  
 Time \_\_\_\_\_ Water Level \_\_\_\_\_ Time \_\_\_\_\_ Water Level \_\_\_\_\_ Time \_\_\_\_\_ Water Level \_\_\_\_\_  
 Date of test 1 8 2010  
 Bailor test 10 gal./min. with 176 ft. drawdown after 17 min  
 Arrest \_\_\_\_\_ gal./min. with stem set at \_\_\_\_\_ ft. for \_\_\_\_\_ hrs.  
 Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
 Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

Success Lot 12  
 32-4E-2h

**CURRENT**  
 Notice of Intent No. W268921  
 Unique Ecology Well ID Tag No. BH491  
 Water Right Permit No. \_\_\_\_\_  
 Property Owner Name Kevin Sundberg  
 Well Street Address lot 12 19th Drive NW  
 City Stanwood County Snohomish  
 Location SB14-114UB4 Sec 2 Twp 22R4 circle one WWM  
 Lat/Long (s, l, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_  
 Still REQUIRED) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_  
 Tax Parcel No. 10757000 01200

**CONSTRUCTION OR DECOMMISSION PROCEDURE**

Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
Black top soil	0	6 <sup>11</sup>
fine conglomerate	6	26
Firm		
Fine gray sandstone	26	76
coarse gray sandstone	76	86
Fine gray sandstone	86	170
coarse gray sandstone	170	176
Fine gray sandstone	176	276

**RECEIVED**  
 DEPARTMENT OF ECOLOGY  
**RECEIVED** JAN 25 2010  
 JAN 26 2010 WATER RESOURCES PROGRAM  
 NWRO  
 Dept of Ecology **RECEIVED**  
 WR-NWRO  
 well producer 16/5/10 Ecology  
 construction from WR-NWRO  
 48 hours  
 4 hour bail test at 16 gpm every  
 10 min. recover overnight 276-170  
 Start Date 12 28 09 Completed Date 1 9 2010

**WELL CONSTRUCTION CERTIFICATION:** I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller  Engineer  Trainee Name (Print) David Dutton  
 Driller/Engineer/Trainee Signature [Signature]  
 Driller or trainee License No. 1297  
 Drilling Company AJ Drilling and Logging Inc  
 Address 22813 60th Drive NW  
 City, State, Zip Stanwood WA 98292  
 Contractor's Registration No. AJ Drilling and Logging Inc Date 1 12 2010  
 Ecology is an Equal Opportunity Employer.

**IF TRAINEE,**  
 Driller's Licensed No. \_\_\_\_\_  
 Driller's Signature \_\_\_\_\_



File Original and First Copy with  
Department of Ecology  
Second Copy - Owner's Copy  
Third Copy - Driller's copy

# WATER WELL REPORT

STATE OF WASHINGTON

Water Right Permit No.

Notice of Intent W151526  
UNIQUE WELL I.D.# ABD271

(1) OWNER: Name Monte Ruble Address 21614 Tyee Rd, MtVernon, WA 98274

(2) LOCATION OF WELL: County Skagit NE 1/4 NE 1/4 Sec 27 T. 33 N.R. 4E W.M.  
STREET ADDRESS OF WELL (or nearest address) same  
TAX PARCEL NO. 33/4E-27A1

(3) PROPOSED USE:  Domestic  Industrial  Municipal  
 Irrigation  Test Well  Other  
 DeWater

(4) TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
 New Well Method:  Dug  Bored  
 Deepened  Cable  Driven  
 Reconditioned  Rotary  Jetted  
 Decommission

(5) DIMENSIONS: Diameter of well 6 inches.  
Drilled 340 feet. Depth of completed well 340 ft.

(6) CONSTRUCTION DETAILS:  
Casing installed:  
 Welded 6 " Diam. from +2 ft. to 56 ft.  
 Liner installed 4 " Diam. from 40 ft. to 340 ft.  
 Threaded \_\_\_\_\_ " Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
Type of perforator used drill  
SIZE of perforations 1/4 in. by 1/4 in.  
4 perforations from 110 ft. to 111 ft.  
4 perforations from 270 ft. to 271 ft.  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
Manufacturer's Name monoflex  
Type pvc Model No. \_\_\_\_\_  
Diam. 4 Slot size 20 from 310 ft. to 320 ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Travel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
Material placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface seal:  Yes  No To what depth? 18 ft.  
Material used in seal bentonite  
Did any strata contain unusable water?  Yes  No  
Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
Method of sealing strata off \_\_\_\_\_

(7) PUMP: Manufacturer's Name \_\_\_\_\_  
Type: \_\_\_\_\_ H.P.

(8) WATER LEVELS: Lend-surface elevation \_\_\_\_\_ ft.  
(457 MSL) above mean sea level \_\_\_\_\_ ft.  
Static level 63 ft. below top of well Date 10/31/2002  
Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_  
(Cap, valve, etc)

(9) WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom? Aquatech  
Yield: 9.6 gal./min. with 187 ft. drawdown after 5 hrs.  
Yield: 9.6 gal./min. with 72 ft. drawdown after 5 hrs.  
Yield: 3 gal./min. with 0 ft. drawdown after 4 hrs.  
Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)  

Time	Water Level	Time	Water Level	Time	Water Level
0	269	1	265.5	2	261
3	259.5	4	257.1	5	254.9
10	244.4	15	233.6	30	204.2

  
Date of test 11/07/2002  
Bailer test \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Flow test 3 gal./min. with stem set at 335 ft. for 1 hrs.  
Isian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
Temperature of water \_\_\_\_\_ Was a chemical analyses made?  Yes  No

(10) WELL LOG or DECOMMISSIONING PROCEDURE DESCRIPTION:  
Formation: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. Indicate all water encountered.

MATERIAL	FROM	TO
topsoil	0	1
brown sandy clay	1	20
gray sandy clay	20	40
brown soft siltstone	40	51
gray sandstone	51	64
brown siltstone	64	75
gray sandstone	75	110
gray sandstone water 1/2gpm	110	111
gray sandstone	111	124
brown siltstone soft	124	134
gray sandstone	134	151
brown siltstone soft	151	180
gray sandstone	180	210
brown siltstone soft	210	216
gray sandstone	216	269
gray course sandstone water 1gpm	269	270
gray course sandstone	270	298
gray course sandstone water	298	299
gray course sandstone	299	321
gray sandstone	321	

shale trap 109  
shale trap 160

RECEIVED

Located in compliance with sec 12-48 supplied by information supplied by owner.

NOV 14 2002

DEPT OF ECOLOG

02211

Work Started 10/02/2002 .19. Completed 10/28/2002 .19

### WELL CONSTRUCTION CERTIFICATION:

I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief

Type or Print Name Brannon Hopke License No. 1825  
(Licensed Driller/Engineer)

Trainee Name \_\_\_\_\_ License No. \_\_\_\_\_

Drilling Company Aquatech Well Drilling & Pumps Inc

(Signed) Brannon Hopke License No. 1825  
(Licensed Driller/Engineer)

Address 2722 Butler Crk Rd SedroWoolay Wa 98284

Contractor's Registration No. AQUATW040K4 Date 11/08/2002 .19

(USE ADDITIONAL SHEETS IF NECESSARY)

Ecology is an Equal Opportunity and Affirmative Action employer. For special accommodation needs, contact the Water Resources Program at (360) 407-6600. The TDD number is (360) 407-6006.



The Department of Ecology does NOT warrant the Data and/or the Information on this Well Report

33601  
380MSL C36 32/4E/3 G

WATER WELL REPORT  
STATE OF WASHINGTON

Street Card No. 076561  
Water Right Permit No.

(1) OWNER: Name NICHOLSON, BILL Address 1019 WARREN STREET MOUNT VERNON, WA 98273-

(2) LOCATION OF WELL: County SNOHOMISH  
(2a) STREET ADDRESS OF WELL (or nearest address) 3205 324TH STREET N.W. - SW 1/4 NE 1/4 Sec 3 T 32 N, R 4E WM

(3) PROPOSED USE: DOMESTIC (10) WELL LOG 32/4E-36

(4) TYPE OF WELL: Owner's Number of well (If more than one) 1  
NEW WELL Method: ROTARY

Formation: Describe by color, character, size of material and structure, and show thickness of aquifers and the kind and nature of the material in each stratum penetrated, with at least one entry for each change in formation.

(5) DIMENSIONS: Diameter of well 6 inches  
Drilled 260 ft. Depth of completed well 260 ft.

MATERIAL	FFON	TD
TOPSOIL	0	3
TAN CLAY	3	12
GRAY CLAY - SEEPAGE	12	15
GRAY GRAVEL & SOME CLAY	15	40
GRAY GRAVEL & CLAY	40	44
GRAY CLAY	44	49
TAN CLAY & SCATRD. GRAV.	49	58
GREEN SAND & CLAY	58	62
GRAY GREEN SANDSTONE	78	87
GRAY SANDSTONE	87	103
GRAY SANDSTONE & CLAM SHELLS	103	132
GRAY SANDSTONE	132	150
GRAY SANDSTONE	150	178
GRAY SILTSTONE	178	204
GRAY BROWN SANDSTONE	204	207
GRAY BROWN SILTSTONE CLAM SHELLS	207	212
GRAY SANDSTONE	212	252
GRAY SANDSTONE & WATER	252	254
GRAY HARD SANDSTONE	254	

(6) CONSTRUCTION DETAILS:  
Casing installed: 6 Dia. from 43 ft. to 87 ft.  
WELDED 4 Dia. from 260 ft. to 60 ft.  
Dia. from ft. to ft.

Perforations: YES  
Type of perforator used SKILL SAW  
SIZE of perforations 1/8 in. by 6 in.  
80 perforations from 240 ft. to 260 ft.  
perforations from ft. to ft.  
perforations from ft. to ft.

Screens: NO  
Manufacturer's Name  
Type Model No.  
Dia. slot size from ft. to ft.  
Dia. slot size from ft. to ft.

Gravel packed: NO  
Gravel placed from ft. to ft. Size of gravel ft.

Surface seal: YES To what depth? 18 ft.  
Material used in seal PUDDLING CLAY  
Did any strata contain unusable water? NO  
Type of water? Depth of strata ft.  
Method of sealing strata cff

(7) PUMP: Manufacturer's Name  
Type H.P.

(8) WATER LEVELS:  
(380MSL) Land-surface elevation above mean sea level ... ft.  
Static level 15 ft. below top of well Date 03/04/91  
Artesian Pressure lbs. per square inch Date  
Artesian water controlled by

Work started 02/28/91 Completed 03/04/91

(9) WELL TESTS: drawdown is amount water level is lowered below static level.

WELL CONSTRUCTOR CERTIFICATION:  
I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Was a pump test made? NO If yes, by whom?  
Yield: gal./min with ft. drawdown after hrs.

Recovery data  
Time Water Level Time Water Level Time Water Level

NAME HAYES DRILLING, INC.  
(Person, firm, or corporation) (Type or print)

Date of test 1/1  
Bailer test gal./min. ft. drawdown after hrs.  
Air test 12 gal./min. w/ stem set at 255 ft. for 1.5 hrs.  
Artesian flow g.p.m. Date  
Temperature of water Was a chemical analysis made? NO

ADDRESS 556 ERSKIG RD. BOW WA  
(SIGNED) Bruce Hayes License No. 1825

Contractor's Registration No. HAYES01106J5 Date 03/14/91

1331

CK400 Invented well

MAR 28 1991

(See CK400 workbooks for DEPT. OF ECOLOGY info.)

1110-1111111111





34-21  
338 S.M.S.L.

~~33/04-34R~~

File Original and First Copy with Department of Ecology  
Second Copy - Owner's Copy  
Third Copy - Driller's Copy

Garth  
Lauritzen

**WATER WELL REPORT**  
STATE OF WASHINGTON

2164's  
21657

Application No

Permit No. 029164

1) OWNER: Name Jerry Meyer Address 2387 Starbird rd Mt Vernon  
2) LOCATION OF WELL: County SEASIT Sec. 34 T. 33 N. R. 4 W.M.  
Bearing and distance from section or subdivision corner

3) PROPOSED USE: Domestic  Industrial  Municipal   
Irrigation  Test Well  Other

(10) WELL LOG: 33/42-34R1  
Formation: Describe by color, character, size of material and structure, and show thickness of aquifers and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of formation.

4) TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
New well  Method: Dug  Bored   
Deepened  Cable  Driven   
Reconditioned  Rotary  Jetted

MATERIAL	FROM	TO
Top soil	0	2
Brown sandy clay	2	20
Gray silty clay	20	40
Sandstone	40	420

5) DIMENSIONS: Diameter of well 6 inches.  
Drilled 420 ft. Depth of completed well 420 ft.

6) CONSTRUCTION DETAILS:  
Casing installed: 6" Diam. from 0 ft. to 45 ft.  
Threaded  " Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Welded  " Diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations: Yes  No   
Type of perforator used \_\_\_\_\_  
SIZE of perforations \_\_\_\_\_ in. by \_\_\_\_\_ in.  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Screens: Yes  No   
Manufacturer's Name \_\_\_\_\_  
Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel packed: Yes  No  Size of gravel: \_\_\_\_\_  
Gravel placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface seal: Yes  No  To what depth 8 ft.  
Material used in seal Ben-tone  
Did any strata contain unusable water? Yes  No   
Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
Method of sealing strata off \_\_\_\_\_

(7) PUMP: Manufacturer's Name Star-ck  
Type: sub HP 1 1/2

(8) WATER LEVELS: Land-surface elevation above mean sea level \_\_\_\_\_ ft.  
Static level (338 S.M.S.L.) 18' ft. below top of well Date 7-26  
Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_ (Cap, valve, etc.)

(9) WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made? Yes  No  if yes, by whom? \_\_\_\_\_  
Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)

Time	Water Level	Time	Water Level	Time	Water Level

2 Date of test 4 \_\_\_\_\_  
Ballois test \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
Temperature of water \_\_\_\_\_ Was a chemical analysis made? Yes  No

Work started July 6, 1989 Completed July 12, 1989

WELL DRILLER'S STATEMENT:  
This well was drilled under my jurisdiction and this report is true to the best of my knowledge and belief.

NAME Anderson Drilling Co.  
(Person, firm, or corporation) (Type or print)  
Address 7412-204th NE Adl

[Signed] Paul Anderson  
(Well Driller)

License No. 1367 Date July 12, 1989

The Department of Ecology does NOT Warrant the Data and/or the Information on this Well Rep

RECEIVED  
OCT 12 1989

DEPARTMENT OF ECOLOGY  
NORTHWEST REGION

33/42-34R1

The Department of Ecology does NOT Warranty the Data and/or the Information on this Well Report

File Original and First Copy with Department of Ecology  
Second Copy - Owner's Copy  
Third Copy - Driller's copy

100724

# WATER WELL REPORT

STATE OF WASHINGTON

Notice of Intent W135810

UNIQUE WELL I.D.# AFP952

Water Right Permit No. 33-4E-34P

(1) OWNER: Name John & Micheale Yengtch Address 23734 Fremali Lane, Mt. Vernon, WA 98274  
(2) LOCATION OF WELL: County Skagit - SE 1/4 SW 1/4 Sec 34 T 33 N.R 4E WM  
(2a) STREET ADDRESS OF WELL (or nearest address) same  
TAX PARCEL NO. \_\_\_\_\_

(3) PROPOSED USE:  Domestic  Industrial  Municipal  
 Irrigation  Test Well  Other  
 DeWater

(4) TYPE OF WORK: Owner's number of well (if more than one) \_\_\_\_\_  
 New Well Method  Dug  Bored  
 Deepened  Cable  Driven  
 Reconditioned  Rotary  Jetted  
 Decommission

(5) DIMENSIONS: Diameter of well 6 inches  
Orled 500 feet Depth of completed well 500 ft

(6) CONSTRUCTION DETAILS:  
Casing installed:  
 Welded 6 " Diam from +2 ft to 64 ft  
 Liner installed 4 " Diam from -10 ft to 500 ft  
 Threaded \_\_\_\_\_ " Diam. from \_\_\_\_\_ ft to \_\_\_\_\_ ft

Perforations:  Yes  No  
Type of perforator used \_\_\_\_\_  
SIZE of perforations \_\_\_\_\_ in by \_\_\_\_\_ in  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft to \_\_\_\_\_ ft  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft to \_\_\_\_\_ ft  
\_\_\_\_\_ perforations from \_\_\_\_\_ ft to \_\_\_\_\_ ft

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
Manufacturer's Name Monoflex  
Type S.S. Model No \_\_\_\_\_  
Diam 4 Slot size 20 from 250 ft to 260 ft  
Diam 4 Slot size 20 from 450 ft to 460 ft

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
Material placed from \_\_\_\_\_ ft to \_\_\_\_\_ ft

Surface seal:  Yes  No To what depth? \_\_\_\_\_ ft  
Material used in seal \_\_\_\_\_  
Did any strata contain unusable water?  Yes  No  
Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
Method of sealing strata off \_\_\_\_\_

(7) PUMP: Manufacturer's Name \_\_\_\_\_  
Type \_\_\_\_\_ HP \_\_\_\_\_

(8) WATER LEVELS: Land-surface elevation above mean sea level \_\_\_\_\_ ft  
379 MSL  
Static level 194' ft below top of well Date 07/26/2001  
Artesian pressure \_\_\_\_\_ lbs per square inch Date \_\_\_\_\_  
Artesian water is controlled by \_\_\_\_\_ (Cap, valve, etc)

(9) WELL TESTS: Drawdown is amount water level is lowered below static level  
Was a pump test made?  Yes  No If yes, by whom? \_\_\_\_\_  
Yield: \_\_\_\_\_ gal/min with \_\_\_\_\_ ft drawdown after \_\_\_\_\_ hrs  
Yield \_\_\_\_\_ gal/min with \_\_\_\_\_ ft drawdown after \_\_\_\_\_ hrs  
Yield \_\_\_\_\_ gal/min with \_\_\_\_\_ ft drawdown after \_\_\_\_\_ hrs.  
Recovery data (time taken as zero when pump turned off) (water level measured from well top to water level)  
Time Water Level Time Water Level Time Water Level  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
Date of test \_\_\_\_\_

Boiler test \_\_\_\_\_ gal/min with \_\_\_\_\_ ft drawdown after \_\_\_\_\_ hrs  
Airtest 1/4 gal/min. with stem set at 500 ft. for 1 hrs  
Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
Temperature of water \_\_\_\_\_ Was a chemical analyses made?  Yes  No

### (10) WELL LOG or DECOMMISSIONING PROCEDURE DESCRIPTION:

Formator: Describe by color, character, size of material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information. Indicate all water encountered

MATERIAL	FROM	TO
topsoil	0	2
brown clay gravel	2	15
gray clay gravel	15	26
granite boulder	26	27
gray gravel clay	27	44
brown clay gravel	44	51
gray clay gravel	51	62
gray sandstone	62	70
gray sandstone shells	70	79
gray sandstone	79	90
brown siltstone	90	95
gray sandstone	95	123
brown sandstone shells	123	131
gray sandstone	131	134
brown siltstone	134	135
gray sandstone	135	170
brown siltstone shells	170	174
gray sandstone	174	211
brown siltstone	211	221
brown fine sandstone	221	227
gray fine sandstone	227	248
gray fine sandstone .25gpm	248	252
brown silt stone	252	255
brown sandstone	255	265
gray fine sandstone	265	279
brown fine sandstone shells	279	280
brown fine sandstone siltstone layers	280	301
black basalt	301	302
brown siltstone layered basalt	302	314
gray fine sandstone	314	393
gray coarse sandstone shells	393	407
gray fine siltstone	407	421
black basalt	421	427

Work Started 07/18/2001 '19 Completed 07/21/2001 '19

### WELL CONSTRUCTION CERTIFICATION:

I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief

Type or Print Name Wayne Logsdon License No 2146  
(Licensed Driller/Engineer)  
Trancee Name Wayne Logsdon License No \_\_\_\_\_  
Drilling Company Aquatech Well Drilling & Pumps Inc.  
(Signed) Wayne Logsdon License No 2146  
(Licensed Driller/Engineer)  
Address 2722 butler Crk Rd SedroWoolley Wa 98284  
Contractor's Registration No AQUATWD040K4 Date 08/23/2001 '19

(USE ADDITIONAL SHEETS IF NECESSARY)  
Ecology is an Equal Opportunity and Affirmative Action employer. For special accommodation needs, contact the Water Resources Program at (360) 407-6000. The TDD number is (360) 407-6005.

AUG 28 2001

DEPT OF ECOLOGY

100724

374-34P01



27M01  
177M5L

33-4E-27M

33/4 E-27M1

170655

Please print, sign and return to the Department of Ecology



# Water Well Report

Original - Ecology, 1<sup>st</sup> copy - owner, 2<sup>nd</sup> copy - driller

DEPT OF ECOLOGY

Construction/Decommission

Construction

Decommission

ORIGINAL INSTALLATION Notice of Intent Number

Current

Notice of Intent No. W1167054

Unique Ecology Well ID Tag No. AGK 787

Water Right Permit No.

Property Owner Name DENISE JANTZ

Well Street Address 22644 ROSE RD.

City MT. VERNON County SKAGIT

Location N1/4-1/4 SW 1/4 Sec 27 Twn 33R 4  EWV  circ  WWM  one

Lat/Long (s, t, r) Lat Deg \_\_\_\_\_ Lat Min/Sec \_\_\_\_\_

still REQUIRED ) Long Deg \_\_\_\_\_ Long Min/Sec \_\_\_\_\_

Tax Parcel No. P118081

**PROPOSED USE:**  DeWater  Domestic  Industrial  Municipal  Irrigation  Test Well  Other \_\_\_\_\_

**TYPE OF WORK:** Owner's number of well (if more than one)  
 New well  Reconditioned  Dug  Bored  Driven  Deepened  Cable  Rotary  Jetted

**DIMENSIONS:** Diameter of well 6 inches, drilled 504 ft.  
 Depth of completed well 504 ft.

**CONSTRUCTION DETAILS**  
 Casing:  Welded 6" diam. from ±2 ft. to 160 ft.  
 Installed:  Liner installed 4 1/2" diam. from -4 ft. to 504 ft.  
 Threaded 2" diam. from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Perforations:  Yes  No  
 Type of perforator used SKILL SAW PVC LINER  
 SIZE of perfs 8 in. by 3/4 in. and no. of perfs 300 from 404 to 504

Screens:  Yes  No  K-Pac Location \_\_\_\_\_  
 Manufacturer's Name \_\_\_\_\_  
 Type \_\_\_\_\_ Model No. \_\_\_\_\_  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.  
 Diam. \_\_\_\_\_ Slot size \_\_\_\_\_ from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Gravel/Filter packed:  Yes  No  Size of gravel/sand \_\_\_\_\_  
 Materials placed from \_\_\_\_\_ ft. to \_\_\_\_\_ ft.

Surface Seal:  Yes  No To what depth? 18 ft.  
 Material used in seal BENTONITE  
 Did any strata contain unusable water?  Yes  No  
 Type of water? \_\_\_\_\_ Depth of strata \_\_\_\_\_  
 Method of sealing strata off \_\_\_\_\_

PUMP: Manufacturer's Name \_\_\_\_\_ H.P. \_\_\_\_\_  
 Type \_\_\_\_\_

**WATER LEVELS:** Land surface elevation above mean sea level \_\_\_\_\_ ft.  
 Static level 168 ft. below top of well Date 4/10/05  
 Artesian pressure \_\_\_\_\_ lbs. per square inch Date \_\_\_\_\_  
 Artesian water is controlled by \_\_\_\_\_ (cap, valve, etc.)

**WELL TESTS:** Drawdown is amount water level is lowered below static level  
 Was a pump test made?  Yes  No. If yes, by whom? \_\_\_\_\_  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Yield: \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Recovery data (time taken at zero when pump turned off) (water level measured from well top to water level)  

Time	Water Level	Time	Water Level	Time	Water Level

 Date of test \_\_\_\_\_  
 Bailer test \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.  
 Airtest 5 gal./min. with stem set at 500 ft. for 1 hrs.  
 Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_  
 Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No

**CONSTRUCTION OR DECOMMISSION PROCEDURE**  
 Formation: Describe by color, character, size-of-material and structure, and the kind and nature of the material in each stratum penetrated, with at least one entry for each change of information indicates all water encountered. (USE ADDITIONAL SHEETS IF NECESSARY.)

MATERIAL	FROM	TO
TOP SOIL	0	1
TAN HARD PAN	1	9
GREY HARD PAN	9	82
GREY CLAY W/ GRAVEL	82	86
GREY SAND/ GRAVEL-CLAY	86	97
GREY SILT	97	98
SAND WOOD SOME WATER	98	98
SAND CLAY WOOD WATER	98	104
GREY CLAY	104	106
GREY SAND W/ CLAY	106	119
SILTY TAN CLAY W/ WATER	119	132
SANDY GREY CLAY	136	143
GREY SAND	143	146
GREY CLAY	146	148
GREY SAND	148	153
GREEN CLAY	153	155
TAN SAND STONE	155	156
GREY SAND STONE	156	380
TAN SILT STONE	380	383
SAND STONE	383	384
SILT STONE & COAL	384	386
SILT STONE	386	410
COAL	410	415
SILT STONE	415	442
GREY SAND STONE	442	455
SILT STONE	455	457
COAL	457	459
SILT STONE	459	470
SAND STONE W/ WATER	470	504

Start Date 3-6-05 Completed Date 4-10-05

33/4-27M01

The Department of Ecology does NOT Warranty the Data and/or the Information on this Well Report

**WELL CONSTRUCTION CERTIFICATION:** I constructed and/or accept responsibility for construction of this well, and its compliance with all Washington well construction standards. Materials used and the information reported above are true to my best knowledge and belief.

Driller/Engineer/Trainee Name (Print) JOSEPH NUNES

Drilling Company CAMALU WEL DRILLING

Driller/Engineer/Trainee Signature Joseph Nunes

Address P.O. Box 432

Driller or trainee License No. 0611

City, State, Zip STANWOOD WA 98292

Date of test \_\_\_\_\_

Contractor's Registration No. CAMALUWA146 R2 Date 4-10-05

Bailer test \_\_\_\_\_ gal./min. with \_\_\_\_\_ ft. drawdown after \_\_\_\_\_ hrs.

Ecology is an Equal Opportunity Employer. ECY 053-1-20 (Rev 2/03)

Airtest 5 gal./min. with stem set at 500 ft. for 1 hrs.

Artesian flow \_\_\_\_\_ g.p.m. Date \_\_\_\_\_

Temperature of water \_\_\_\_\_ Was a chemical analysis made?  Yes  No