RUBY CREEK PLACER CLAIM

MAP DRAWN FROM CHAIN & COMPASS SURVEY & WASHINGTON STATE HIWAY PLAN & PROFILE OF NEW ALIGNMENT

BY: M.M. SUCHY SEPT 9, 1959

SCALE: 1" = 100'

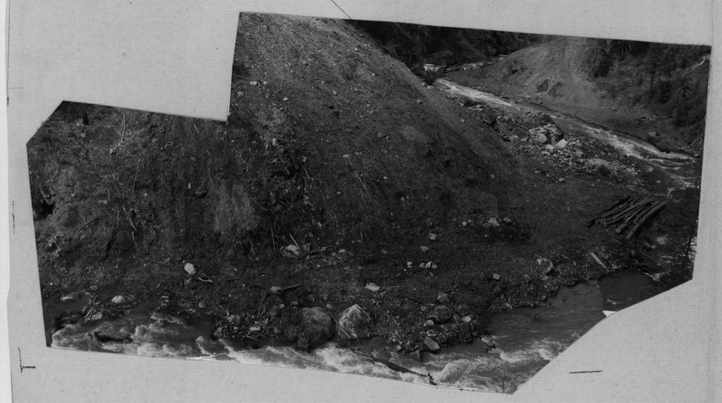

SAMPLE NO	VOLUME OF MAT'L WASHED IN CU. FT.	POSITION	GOLD RECOVERED IN MG. WEIGHED BY M. SUCHY	GOLD RECOVERED IN MG. REPORTED BY ASSAYER	TOTAL WEIGHT IN MG.	VALUE PER CU. YD. OF MAT'L WASHED	VALUE PER CU YD BANK RUN MAT'L (50% BOULDERS)
G-1	0.5	4½' below Surface-Shaft	6 fine Colors - lost in furnace.		—	—	—
G-2	6.1	5' below Surface-Shaft	14.6	34.0	48.6	24.2 ¢	12.1 ¢
G-3	7.0	9½' below surface	36.1	4.0	40.1	17.4 ¢	8.7 ¢
G-4	5.6	Bott. 1½' at bedrock	10.3	3.3	13.6	7.35 ¢	3.2 ¢
G-5	5.6	Bott. 3' at bedrock	14.6	2.9	17.5	9.55 ¢	4.8 ¢
G-6	0.47	11' above bedrock	NONE	0.1	0.1	0.6 ¢	0.3 ¢
G-101	27.0	Bedrock Mat'l from Dozer Cut	30.2	3.2	33.4	3.76 ¢	1.4 ¢
G-102	27.0	" "	208.0	17.8	225.8	22.6 ¢	11.3 ¢
G-103	6.67	3' at bedrock	None	13.1	13.1	6.0 ¢	3.0 ¢